


GUGGENHEIM MUSEUM, NY, 1943
Frank Ll. Wright

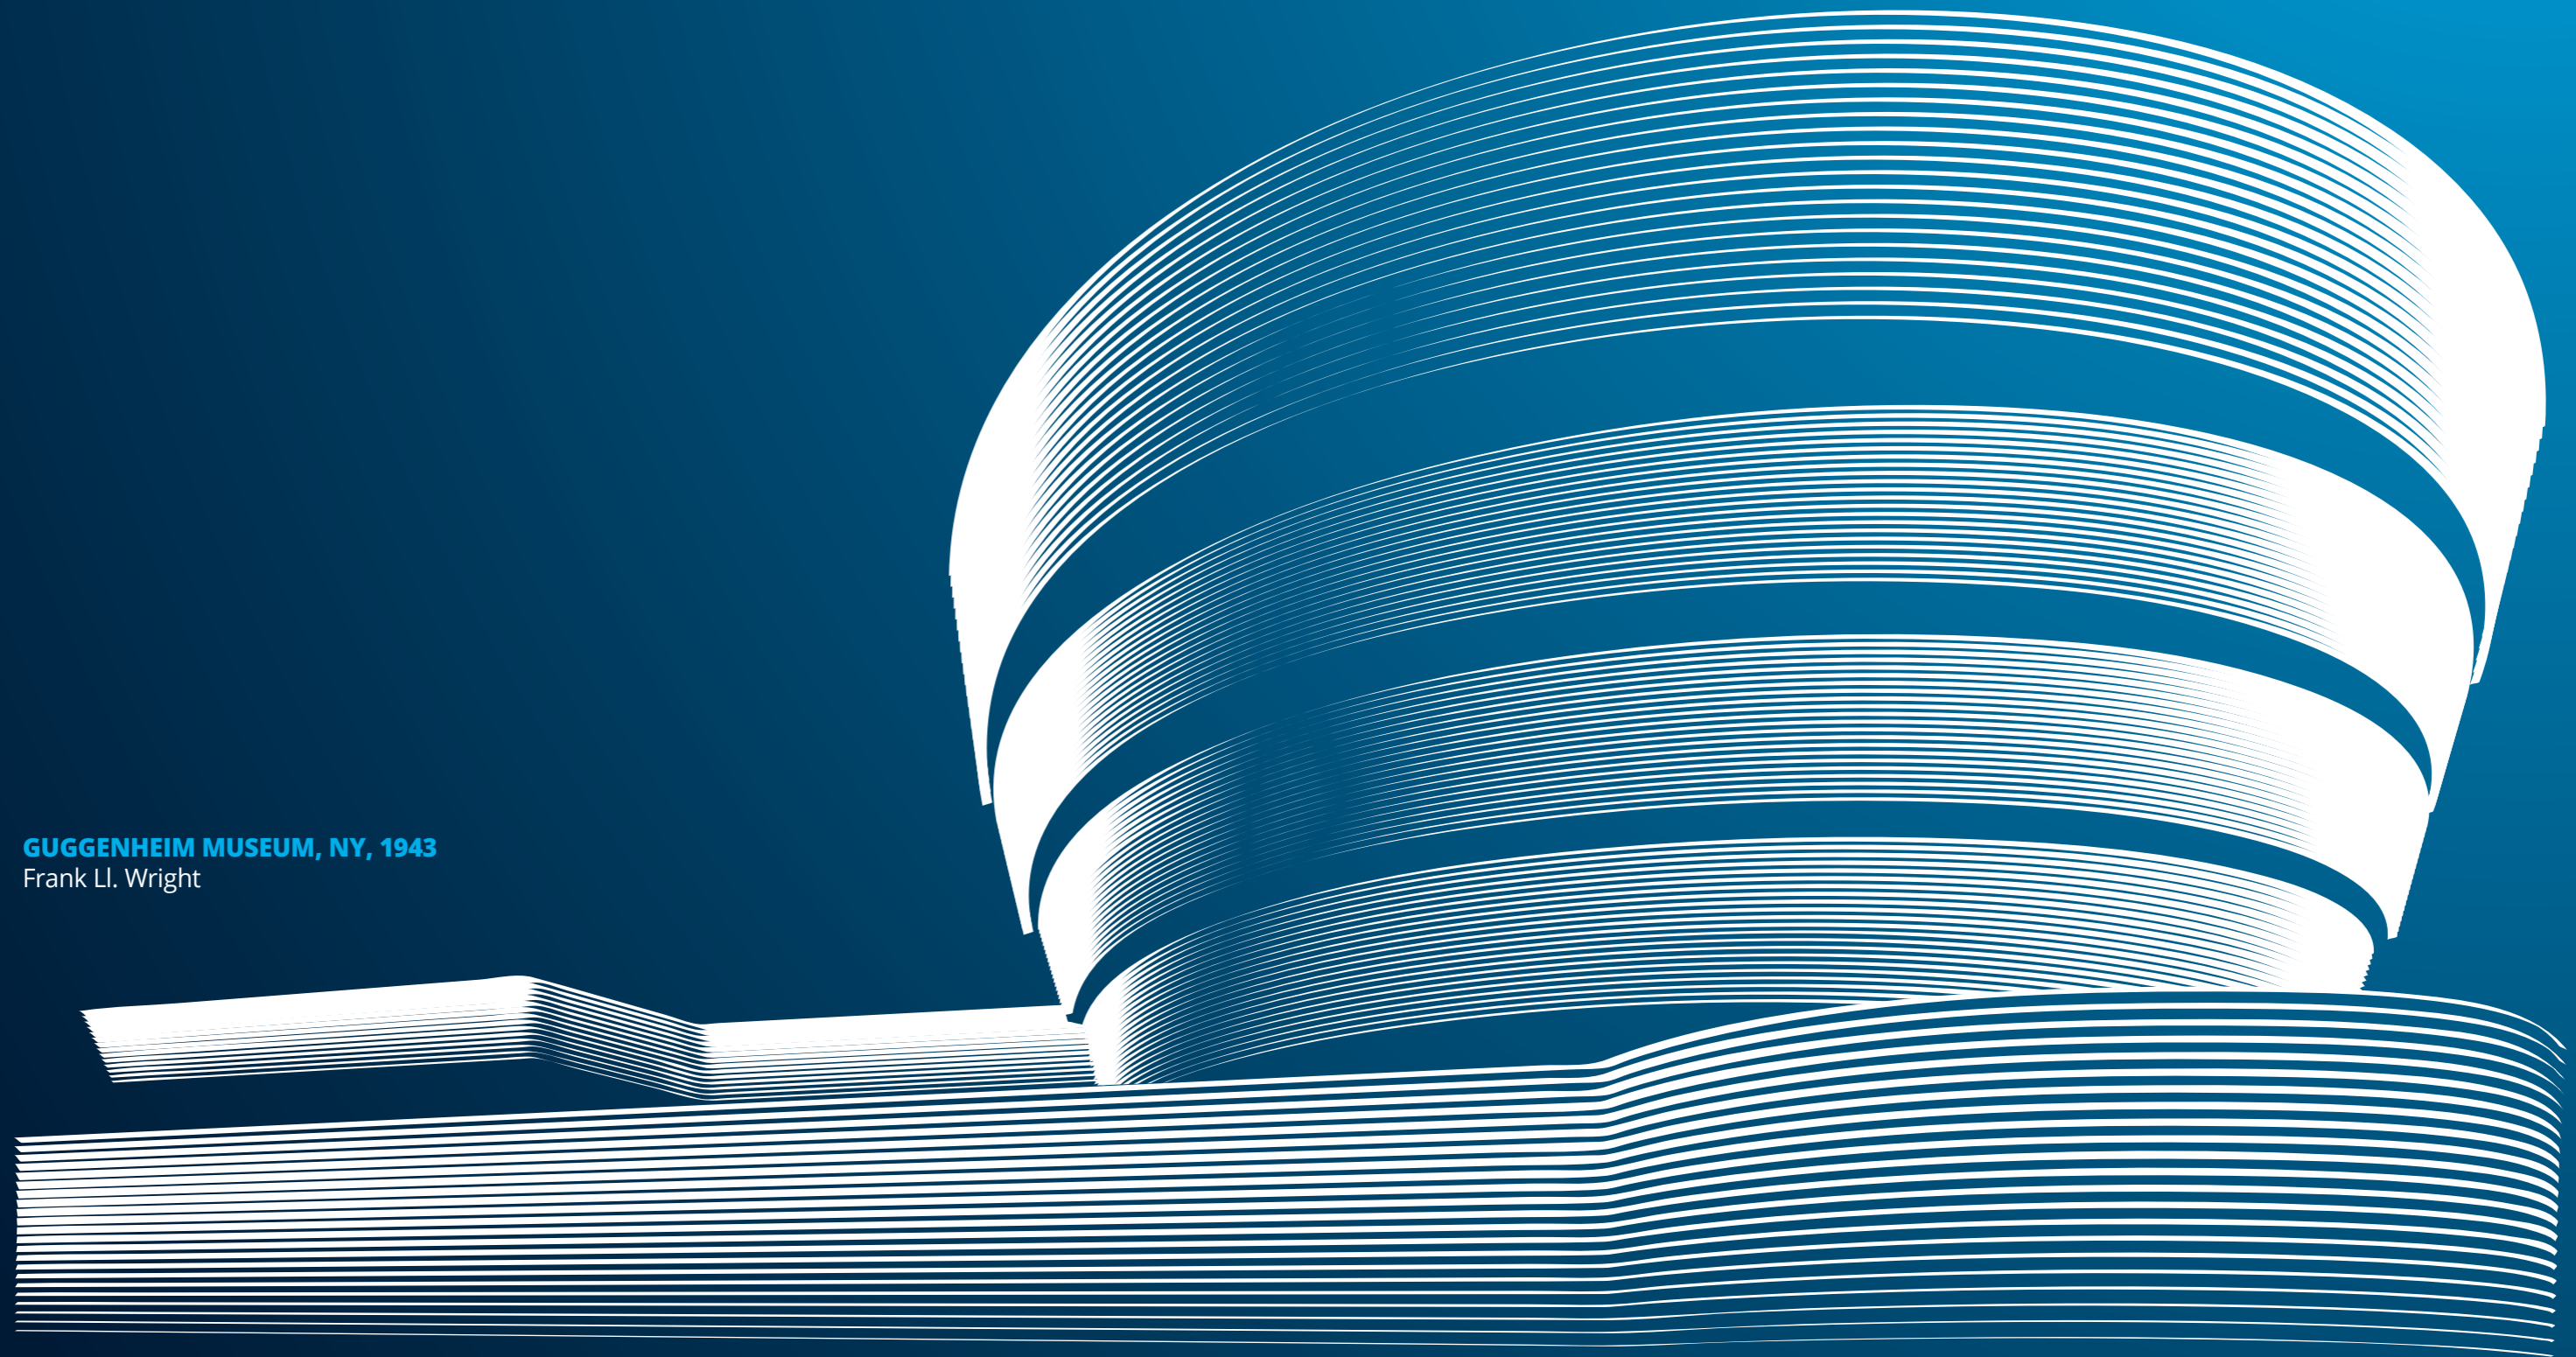


PROTERMINAL

POLISHED AND SATIN FINISH
STAINLESS STEEL AISI 304/1.4301-V2A

PROTERMINAL is a professional edging profile used mainly to join similar or different floor materials (e.g. tiles/ tiles - tiles/parquet/marble/laminates/carpeting /linoleum, etc.) of differing thickness.

PROTERMINAL in stainless steel is also used to protect steps and decking, as a floor edging profile and skirting covering. Match with PROLISTEL strips in stainless steel AISI 304/1.4301-V2A with polished or satin finish and in aluminium with anodized or polished chrome finish.

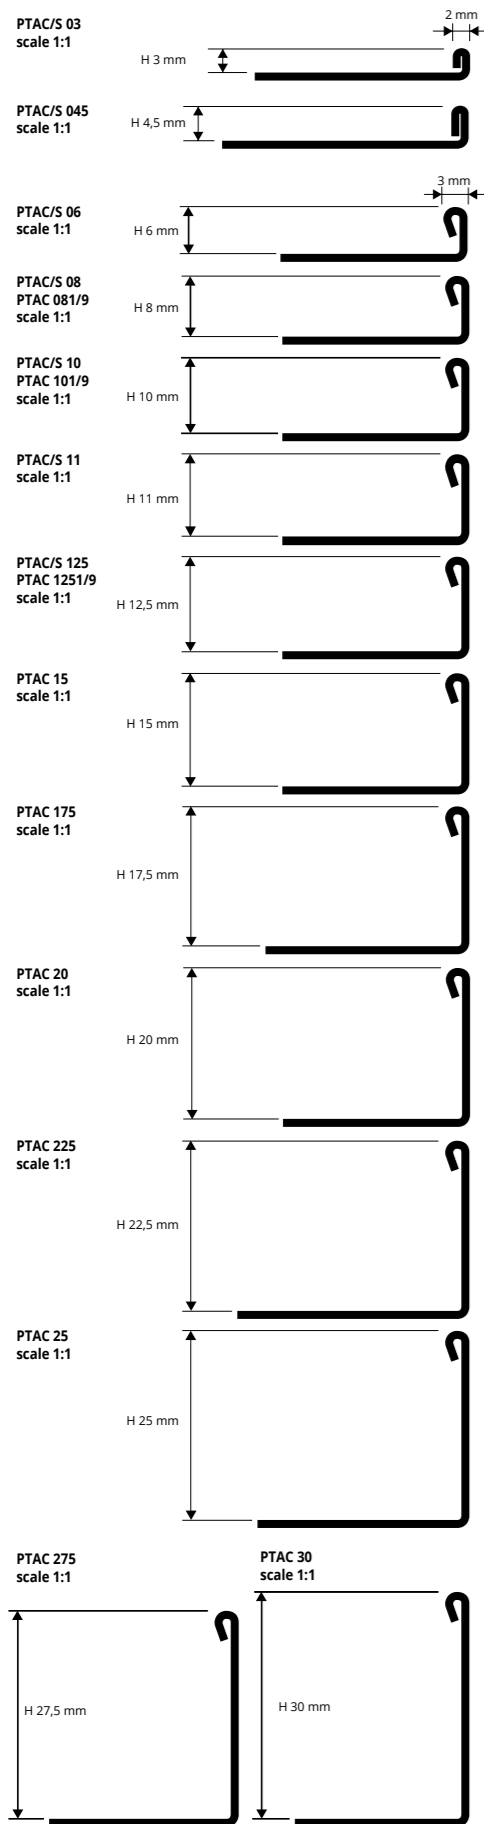

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm
(H 12,5±30 mm - 20 Pcs - 54 lm) - 10/10 mm

Article	H mm	€/lm	€/Pc
PTAC 03	3	7,41	20,01
PTAC 045	4,5	7,56	20,41
PTAC 06	6	7,88	21,28
PTAC 08	8	8,15	22,01
PTAC 10	10	8,57	23,14
PTAC 11	11	8,72	23,54
PTAC 125	12,5	8,89	24,00
PTAC 15	15	9,31	25,14
PTAC 175	17,5	9,84	26,57
PTAC 20	20	10,10	27,27
PTAC 225	22,5	10,73	28,97
PTAC 25	25	11,42	30,83
PTAC 275	27,5	11,85	32,00
PTAC 30	30	12,27	33,13

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 1 lm - pack. 40 Pcs - 40 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PTAC 081	8	8,57	8,57
PTAC 101	10	8,94	8,94
PTAC 1251	12,5	9,31	9,31

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 0,9 lm - pack. 40 Pcs - 36 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PTAC 089	8	7,73	7,73
PTAC 109	10	8,04	8,04
PTAC 1259	12,5	8,35	8,35




SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm
(H 12,5±20 mm - 20 Pcs - 54 lm) - 10/10 mm

Article	H mm	€/lm	€/Pc
PTACS 03	3	8,62	23,27
PTACS 045	4,5	9,41	25,41
PTACS 06	6	9,73	26,27
PTACS 08	8	10,05	27,14
PTACS 10	10	10,42	28,13
PTACS 11	11	10,58	28,57
PTACS 125	12,5	10,79	29,13
PTACS 15	15	11,79	31,83
PTACS 20	20	12,06	32,56

COLOURS

AC - Polished stainless steel AISI 304/1.4301-V2A	ACS - Satin finish stainless steel AISI 304/1.4301-V2A

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

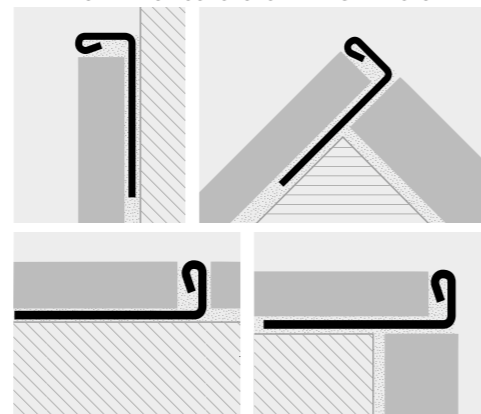

1. Choose the PROTERMINAL with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices.



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

= News 2019

* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROTERMINAL

POLISHED STAINLESS STEEL
AIS I 316/1.4404-V4A

PROTERMINAL are manufactured with the same forms and sections, as well as in the very resistant material, the stainless shiny steel 316/1.4401-V4A, suitable for outdoors and marine environment with much presence of saltiness and considerable atmospheric agents. They are used as protection for the external angles of tiles, in order to separate or to create the separating joints in the pavements, to terminate the finishing of wall coverings, for platforms, stair steps, bathtubs, etc. They guarantee the impeccable work, ensuring considerable aesthetic effect as well. They strengthen the tile edge and prevents from chipping and breakages. Required by new European regulations on safety and accident prevention in public and private places.





POLISHED STAINLESS ST. AISI 316L/1.4404-V4A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PTACM 06	6	9,09	24,54
PTACM 08	8	9,31	25,14
PTACM 10	10	9,79	26,43
PTACM 125	12,5	10,79	29,13

COLOURS



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

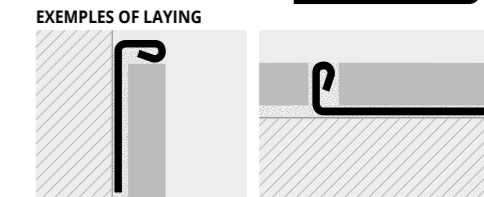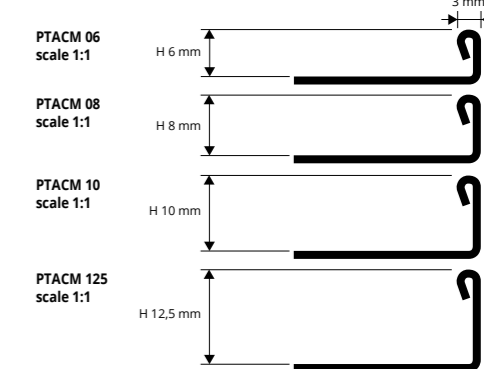

PROTERMINAL is a professional edging profile used mainly to join similar or different floor materials (e.g. tiles/tiles - tiles/parquet/marble/granite, etc.) of differing thickness.

PROTERMINAL in brass is also used to protect steps and decking, as a floor edging profile, to cover skirting, decking and worktops and to frame doormats.



NATURAL BRASS thermo packed - 10 Pcs
bar length 2,70 lm pack. 40 Pcs - 108 lm (H 12,5±20 mm - 20 Pcs - 54 lm)

Article	H mm	€/lm	€/Pc
PTON 06	6	6,88	18,58
PTON 08	8	7,30	19,71
PTON 10	10	7,83	21,14
PTON 125	12,5	8,46	22,84
PTON 15	15	9,09	24,54
PTON 20	20	10,68	28,84
PTON 25	25	12,31	33,24


POLISHED BRASS thermo packed 10 Pcs
bar length 2,70 lm - pack. 40 Pcs - 108 lm (H 12,5 mm - 20 Pcs - 54 lm)

Article	H mm	€/lm	€/Pc
PTOL 08	8	9,48	25,60
PTOL 10	10	10,20	27,54
PTOL 125	12,5	11,02	29,75

ANTIQU BRASS thermo packed
lungh. barre 2,7 ml - conf. 20 PZ - 54 ml

Article	H mm	€/lm	€/Pc
PTOB 08	8	22,90	61,83
PTOB 10	10	24,95	67,37
PTOB 125	12,5	26,90	72,63

COLOURS





Chrome-plated Brass version page 35

NATURAL BRASS thermo packed 10 Pcs
bar length 0,90 lm - pack. 40 Pcs - 36 lm

Article	H mm	€/lm	€/Pc
PTON 069	6	6,61	6,61
PTON 089	8	6,98	6,98
PTON 109	10	7,49	7,49
PTON 1259	12,5	7,96	7,96

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

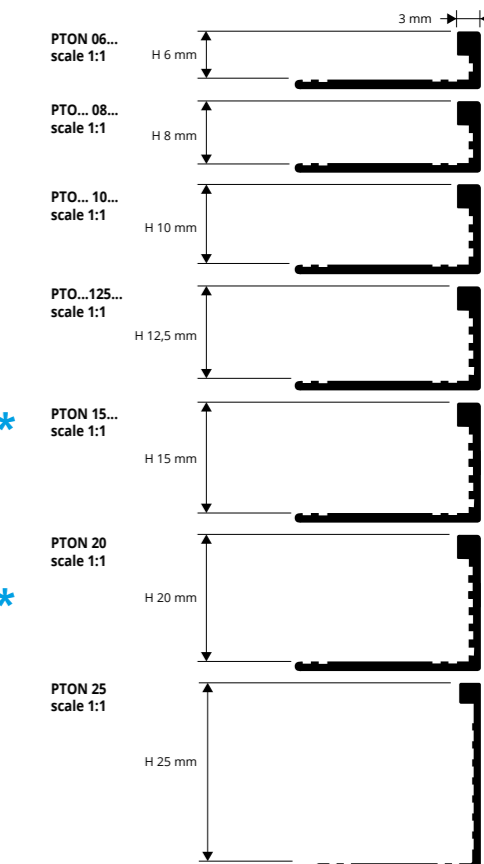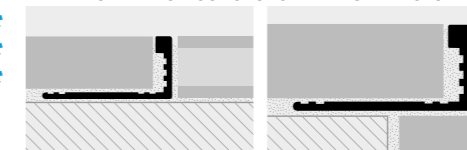

1. Choose the "PROTERMINAL" with the same height as the thickness of the floor/wall covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

Curve available, see page 101

= News 2019


* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROTERMINAL

NATURAL ALUMINIUM AND ANODIZED SILVER ALUMINIUM

PROTERMINAL is a professional edging profile designed to protect and decorate the outside corners of tile, mosaic and marble coverings of differing thickness. **PROTERMINAL** in aluminium is also used to join different floor materials and to protect steps and decking. Excellent as the edging trim skirtings and for bathroom and kitchen wall coverings. Match with PROLISTEL ALL strips in anodized aluminium with silver and polished chrome finish and with PROLISTEL ACC strips in AISI 304-1.4301 stainless steel with polished or satin finish.

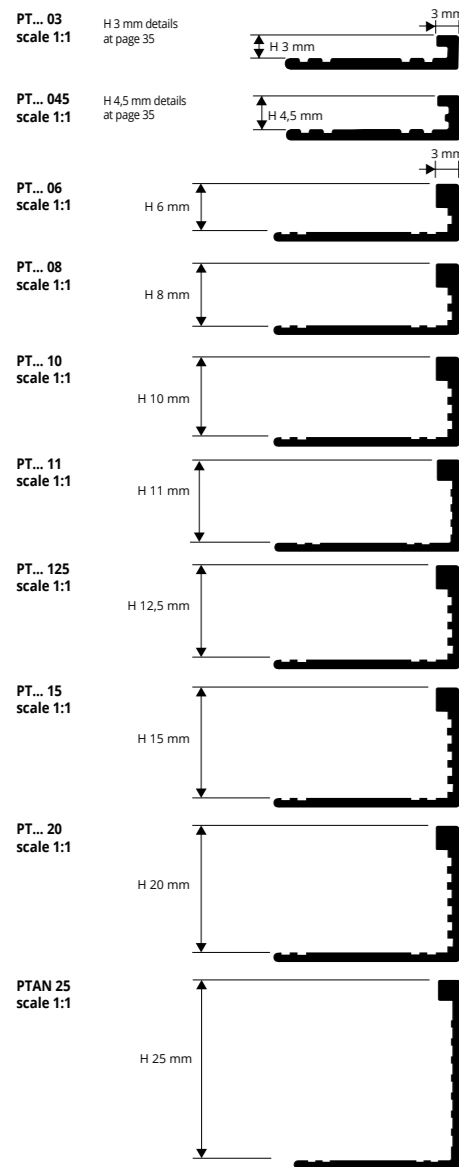

NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,70 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTAN 06	6	2,43	6,56
PTAN 08	8	2,53	6,83
PTAN 10	10	2,65	7,16
PTAN 11	11	2,73	7,37
PTAN 125	12,5	2,80	7,56
PTAN 15	15	3,07	8,29
PTAN 20	20	3,59	9,69
PTAN 25	25	4,22	11,39

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,70 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTAA 06	6	3,34	9,02
PTAA 08	8	3,39	9,15
PTAA 10	10	3,59	9,69
PTAA 11	11	3,91	10,56
PTAA 125	12,5	4,13	11,15
PTAA 15	15	4,39	11,85
PTAA 20	20	5,13	13,85


NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 0,90 lm - pack. 40 Pcs - 36 lm

Article	H mm	€/lm	€/Pc
PTAN 069	6	2,53	*
PTAN 089	8	2,65	*
PTAN 109	10	2,75	*
PTAN 1259	12,5	2,85	*

NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 1 lm - pack. 40 Pcs - 40 lm

Article	H mm	€/lm	€/Pc
PTAN 061	6	3,12	*
PTAN 081	8	3,22	*
PTAN 101	10	3,34	*
PTAN 1251	12,5	3,54	*


COLOURS



Polished version page 36

Curve available, see page 101

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

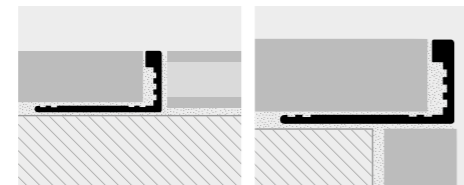

1. Choose the "PROTERMINAL" with the same height as the thickness of the covering.
2. Apply the adhesive onto the area of application of the profile.
3. Lay and align the profile pressing the perforated flange into the adhesive.
4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile.
5. Use the adhesive to seal any empty interstices.



* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROLEVIGAL

NATURAL BRASS


PROLEVIGAL are separating profiles used to create the technical joint in the special types of pavements such as marble- Venice- palladium ones, that must be smoothed after their laying process. The particular "L" shape with the cut/drilled base and 2,5 mm thick vertical edge consent the perfect smoothing and constant thickness as well. Available in natural aluminium and natural brass, various thickness, as well in outlined/bent **PROLEVIGAL CURVES** BRASS versions.



NATURAL BRASS thermo packed 10 Pcs
bar length 2,7 lm - pack. 40 Pcs-108 lm (H 15;17,5;20 mm - 20 Pc 54 lm)

Article	H mm	€/ml	€/PZ
PLGON 08	8	7,95	21,47 *
PLGON 10	10	8,28	22,36
PLGON 125	12,5	8,84	23,87
PLGON 15	15	9,62	25,97
PLGON 175	17,5	10,30	27,81 *
PLGON 20	20	11,30	30,51

COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



(price and delivery time to be agreed)


PROLEVIGAL are separating profiles used to create the technical joint in the special types of pavements such as marble- Venice- palladium ones, that must be smoothed after their laying process. The particular "L" shape with the cut/drilled base and 2,5 mm thick vertical edge consent the perfect smoothing and constant thickness as well. Available in natural aluminium and natural brass, various thickness, as well in outlined/bent **PROLEVIGAL CURVE** AL versions.



NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm	€/lm	€/Pc
PLGAN 045	4,5	2,22	5,99
PLGAN 06	6	2,43	6,56
PLGAN 08	8	2,70	7,29
PLGAN 10	10	2,75	7,43
PLGAN 125	12,5	3,02	8,15
PLGAN 15	15	3,34	9,02
PLGAN 175	17,5	3,70	9,99
PLGAN 20	20	3,86	10,42

COLOURS

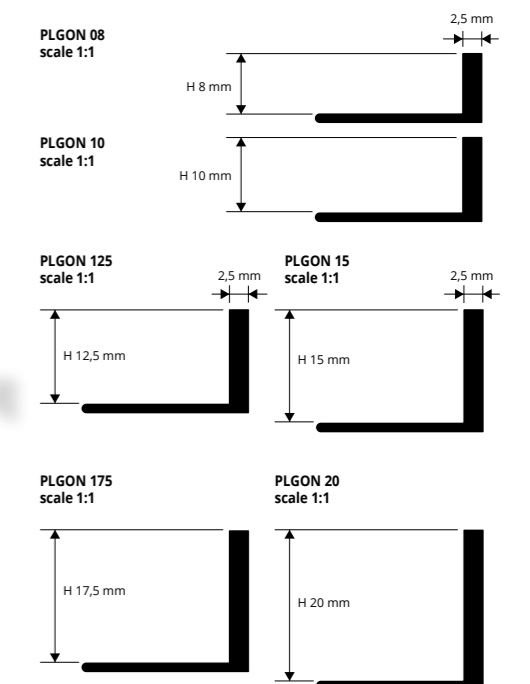

PROLEVIGAL

NATURAL ALUMINIUM

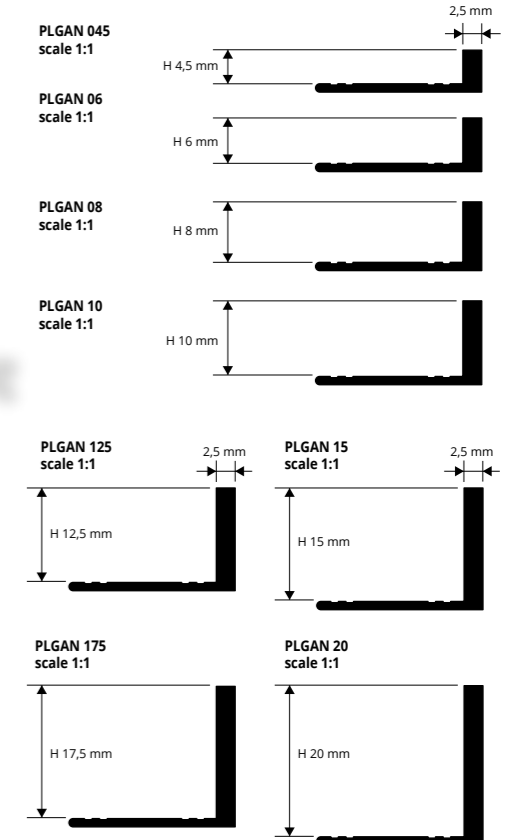


* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROELEGANT

NATURAL, POLISHED AND CHROMED BRASS

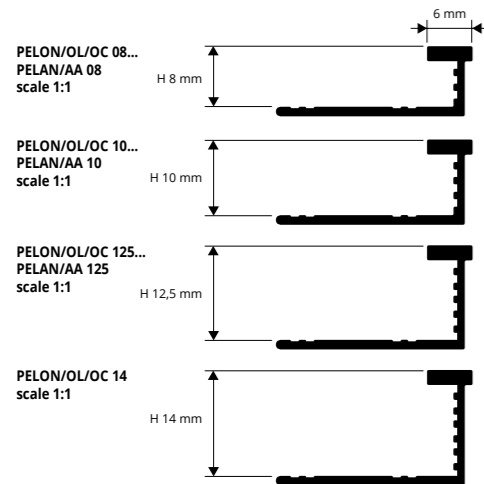

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

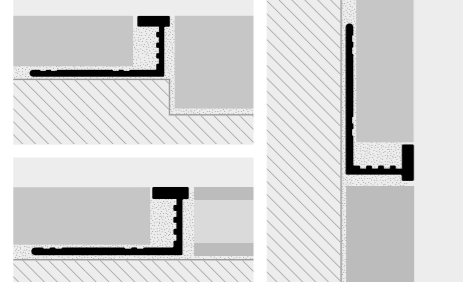

1. Choose the "PROELEGANT" with the same height as the thickness of the wall covering/floor. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

PROELEGANT is a refined profile, with 6 mm visible surface, designed to cover the joint between two types of floor covering, tiles - parquet, marble or granite, bestowing a prestige aesthetic effect that is ideal for indoor and outdoor finishes, even when subject to considerable loads. PROELEGANT is available in polished, natural and chromed brass. It is available in various heights in order to satisfy all technical, practical and, in particular, decorative requirements. The chromed version may be used as a decorative strip in the wall covering.




POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PELOL 08	8	13,14	35,48 *
PELOL 10	10	13,50	36,45 *
PELOL 125	12,5	13,99	37,77 *
PELOL 14	14	14,46	39,04 *

NATURAL BRASS thermo packed 10 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PELON 08	8	10,09	27,24 *
PELON 10	10	10,68	28,84 *
PELON 125	12,5	11,10	29,97 *
PELON 14	14	12,01	32,43 *

COLOURS



CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PELOC 08	8	16,56	44,71 *
PELOC 10	10	16,90	45,63 *
PELOC 125	12,5	17,36	46,87 *
PELOC 14	14	17,81	48,09 *


NATURAL BRASS thermo packed 5 Pcs
bar length 0,90 lm - pack. 40 Pcs - 36 lm

Article	H mm	€/lm	€/Pc
PELON 089	8		9,67 *
PELON 109	10		10,48 *
PELON 1259	12,5		10,90 *

PROELEGANT

NATURAL ALUMINIUM AND ANODIZED SILVER ALUMINIUM

EXAMPLES OF LAYING (for instructions see the product above)

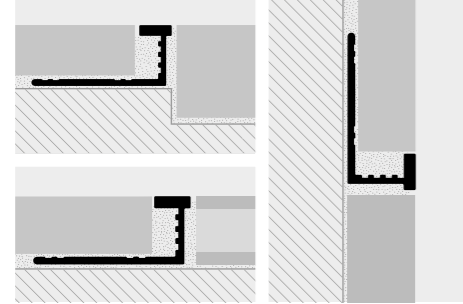

Curve available, see page 103



NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PELAN 08	8	4,13	11,15 *
PELAN 10	10	4,39	11,85 *
PELAN 125	12,5	4,66	12,58 *

COLOURS



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PELAA 08	8	5,18	13,99 *
PELAA 10	10	5,45	14,72 *
PELAA 125	12,5	5,72	15,44 *

© 2010 All rights reserved by Progress Profiles, Printed in Italy

© 2010 All rights reserved by Progress Profiles, Printed in Italy


* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.


PROFINAL

POLISHED, SATIN FINISH AND SANDED STAINLESS STEEL AISI 304/1.4301-V2A

PROFINAL is a profile in stainless steel AISI 304/1.4301-V2A polished, satined and sanded. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

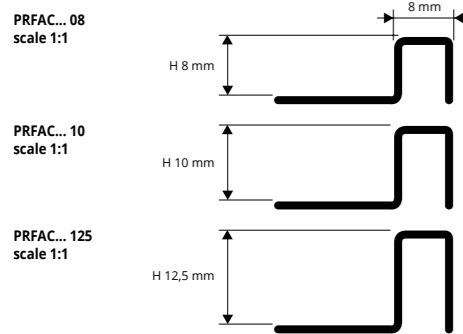

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

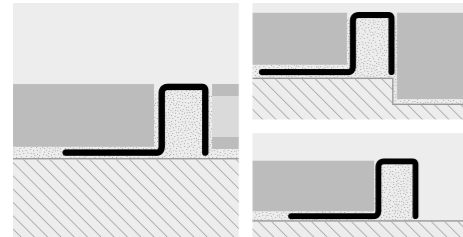

1. Choose the "PROFINAL" with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PRFAC 08	8	11,04	29,81
PRFAC 10	10	11,61	31,35
PRFAC 125	12,5	12,58	33,97

COLOURS



SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PRFACS 08	8	12,06	32,56
PRFACS 10	10	12,59	33,99
PRFACS 125	12,5	13,28	35,86

SANDED STAINLESS STEEL AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm




Article	H mm	€/lm	€/Pc
PRFACSB 08	8	12,90	34,83 *
PRFACSB 10	10	13,45	36,32 *
PRFACSB 125	12,5	14,15	38,21 *

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.


PROFINAL

NATURAL, POLISHED, CHROMED AND ANTIQUE BRASS

PROFINAL is a profile in natural, polished and chromed brass. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

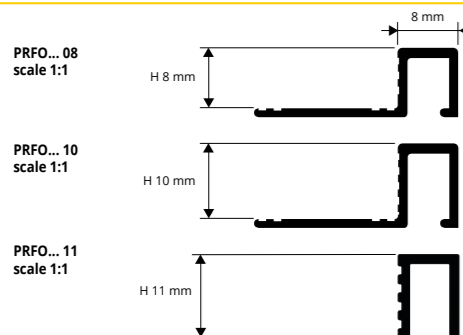


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

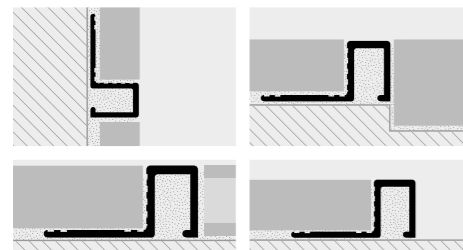

NATURAL BRASS thermo packed 5 Pcs bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRFON 08	8	10,85	29,30
PRFON 10	10	12,64	34,13
PRFON 125	12,5	13,94	37,64 *

COLOURS

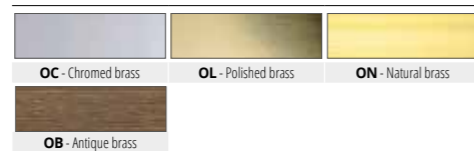

POLISHED BRASS thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRFOL 08	8	13,69	36,96 *
PRFOL 10	10	14,61	39,45
PRFOL 125	12,5	15,56	42,01

CHROMED BRASS thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 15 mm - 40,5 lm)

Article	H mm	€/lm	€/Pc
PRFOC 08	8	17,46	47,14
PRFOC 10	10	19,25	51,98
PRFOC 11	11	20,21	54,57
PRFOC 125	12,5	20,84	56,27
PRFOC 15	15	22,00	59,40

ANTIQUÉ BRASS thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRFOB 08	8	29,00	78,30 *
PRFOB 10	10	31,50	85,50 *
PRFOB 125	12,5	33,75	91,13 *

= News 2019

* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROFINAL

NATURAL ALUMINIUM AND ANODIZED SILVER ALUMINIUM

PROFINAL is a profile in natural and anodized silver aluminium. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.



NATURAL ALUMINIUM thermo packed 10 Pcs bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm	€/lm	€/Pc
PRFAN 08	8	4,23	11,42 *
PRFAN 10	10	4,55	12,29
PRFAN 125	12,5	4,81	12,99

COLOURS




ANODIZED SILVER ALUMINIUM thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PRFAA 08	8	5,60	15,12
PRFAA 10	10	5,87	15,85
PRFAA 125	12,5	6,14	16,58

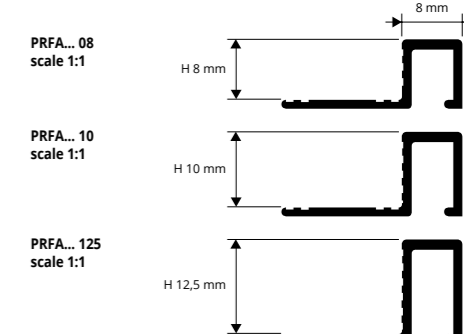

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

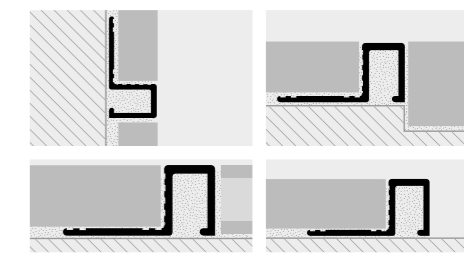

1. Choose the "PROFINAL" with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

PROSQUARE

NATURAL BRASS



NATURAL BRASS bar length 3 lm - pack. 20 Pcs - 60 lm

Article	H x L mm	€/lm	€/Pc
PQEON 108	10 X 8	17,77	53,31 *

COLOURS



PROANGLE

CHROMED, POLISHED BRASS




CHROMED, POLISHED BRASS thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm (PGAOC 10 : 27 lm)

Article	L x H mm	€/lm	€/Pc
PGAOC 10 (chromed)	10 X 10	21,33	57,59
PGAOL 10 (polished)	10 X 10	17,14	46,28 *



COLOURS




* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROJOINT

NATURAL AND POLISHED BRASS

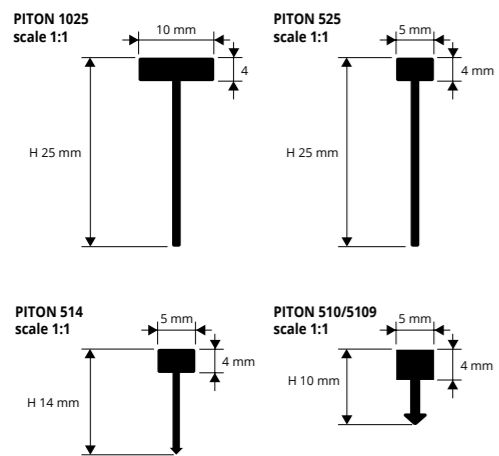


POLISHABLE NATURAL BRASS
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PITON 1025	10 X 25	13,43	36,26
PITON 525	5 X 25	7,19	19,41
PITON 514	5 X 14	6,88	18,58
PITON 510	5 X 10	6,09	16,44

POLISHED BRASS
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PITOL 1025	10 X 25	18,13	48,95 *
PITOL 525	5 X 25	9,71	26,22 *
PITOL 514	5 X 14	9,29	25,08 *
PITOL 510	5 X 10	8,22	22,19 *


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

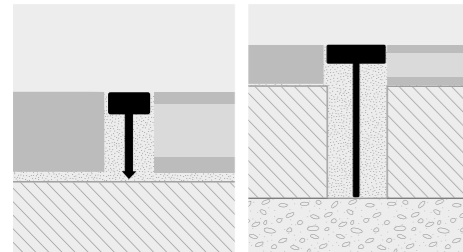


1. Choose "PROJOINT" according to the desired height.
2. Cut "PROJOINT" to the desired length.
- Mortar laying**
3. Cut with a trowel the fresh screed following the floor edges.
4. Apply the profile inside the fresh screed taking care to align it with the surface of the floor. After laying the joint should be 0,5 mm below the floor covering surface.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.
- Adhesive laying**
3. Apply the adhesive on the support where the profile will be laid. After laying the joint should be 0,5 mm below the floor covering surface.
4. Lay the tiles aligning them with the profile leaving a 2 mm joint. Remove immediately all the remains of adhesive from the profile surface.
5. Fill the joints between the profile and the tile with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.

PROJOINT

NATURAL ALUMINIUM

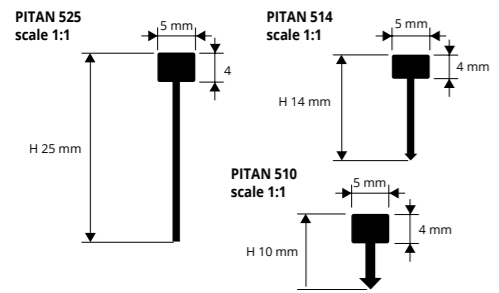

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

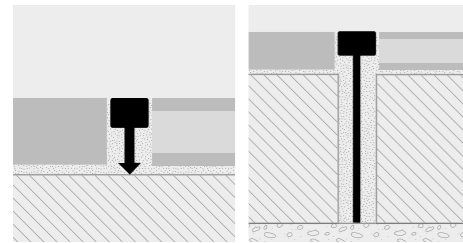

1. Choose "PROJOINT" according to the desired height.
2. Cut "PROJOINT" to the desired length.
- Mortar laying**
3. Cut with a trowel the fresh screed following the floor edges.
4. Apply the profile inside the fresh screed taking care to align it with the surface of the floor. After laying the joint should be 0,5 mm below the floor covering surface.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.
- Adhesive laying**
3. Apply the adhesive on the support where the profile will be laid. After laying the joint should be 0,5 mm below the floor covering surface.
4. Lay the tiles aligning them with the profile leaving a 2 mm joint. Remove immediately all the remains of adhesive from the profile surface.
5. Fill the joints between the profile and the tile with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.



POLISHABLE NATURAL BRASS
bar length 0,90 lm - pack. 40 Pcs

Article	L x H mm	€/lm	€/Pc
PITON 5109	5 X 10		13,23

CONSISTING OF 1 ECOBLISTER WITH 2 PCS. OF 0.90 LM

POLISHED BRASS
bar length 0,90 lm - pack. 40 Pcs

Article	L x H mm	€/lm	€/Pc
PITOL 5109	5 X 10		17,86 *

CONSISTING OF 1 ECOBLISTER WITH 2 PCS. OF 0.90 LM

COLOURS

Article	ON DEMAND
ON - Natural brass	OL - Polished brass

* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROCANAL is a channel for joining floors and also for use as strips in wall coverings. This profile is made in natural, polished and chromed brass as well as natural or anodized silver aluminium. It is also used as a cable channel for the insertion of wires and conduits in all types of floor.

PROCANAL

NATURAL, POLISHED, CHROMED AND ANTIQUE BRASS NATURAL AND ANODIZED SILVER ALUMINIUM



NATURAL BRASS thermo packed 10 Pcs
POLISHED and CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm (PCLOC 10 - 81 lm)

Article	L x H mm	€/lm	€/Pc
PCLOL 10 (natural)	10 X 10	10,36	27,97
PCLOL 10 (polished)	10 X 10	11,74	31,70
PCLOC 10 (chromed)	10 X 10	16,55	44,69
PCLOB 10 (antique)	10 X 10	28,75	77,63



NATURAL ALUMINIUM thermo packed 10 Pcs
ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PCLAN 10 (natural)	10 X 10	2,40	6,48
PCLAA 10 (anodized silver)	10 X 10	3,20	8,64

Available Stainless steel AISI 304/1.4301-V2A "PROLISTEL" 10x10 PLTAC 10 / PLTACS 10 (page 38)

COLOURS

AN - Natural alum.	AA - Anodized silver alum.
--------------------	----------------------------

COLOURS

ON - Natural brass	OL - Polished brass	OC - Chromed brass
OB - Antique Brass		

PROFLAT is a range of 20 and 40 mm natural brass or steel strips 3 mm thick. Ideal for dividing up flooring on the same level, they may be polished in situ and also curved/shaped to create decorative patterns that are particularly recommended for marble, Palladian, Venetian and cement or resin-based floors.

PROFLAT

STAINLESS STEEL AISI 304/1.4301-V2A NATURAL BRASS



STAINLESS STEEL AISI 304/1.4301-V2A
bar length 3 lm - pack. 5 Pcs - 15 lm

Article	L x H mm	€/lm	€/Pc
GPLAC 2033	3 X 20	10,05	30,15
GPLAC 4033	3 X 40	16,40	49,20

STAINLESS STEEL AISI 304/1.4301-V2A
bar length 3 lm - pack. 5 Pcs - 15 lm

Article	L x H mm	€/lm	€/Pc
GPLAC 2053	5 X 20	15,34	46,02 *
GPLAC 5053	5 X 50	32,26	96,78 *



POLISHABLE NATURAL BRASS
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm

Article	L x H mm	€/lm	€/Pc
GPLON 2025	2,5 X 20	11,15	30,11
GPLON 4025	2,5 X 40	14,81	39,99


COLOURS

AC - Stainless steel AISI 304/1.4301-V2A	ON - Natural brass
--	--------------------


Available ON REQUEST IN SATINED Stainless steel

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

1. Choose "PROFLAT" according to the desired height and visible surface.
2. Cut "PROFLAT" to the desired length.
3. Cut with a trowel the fresh screed following the floor edges.
4. Apply the profile inside the fresh screed taking care to align it with the surface of the floor.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.

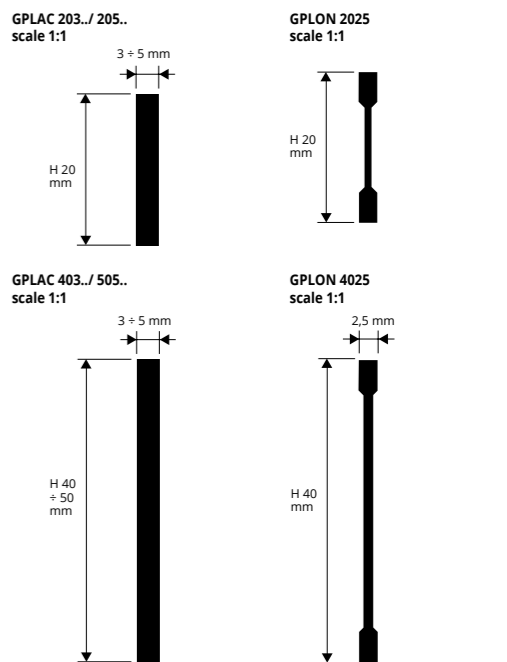

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

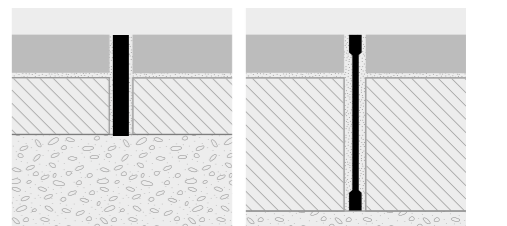

News 2019

* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.


© 2019 All rights reserved by Progress Profiles. Printed in Italy

© 2019 All rights reserved by Progress Profiles. Printed in Italy

PROSLIDER

POLISHED AND SATIN FINISH
STAINLESS STEEL AISI 304/1.4301-V2A

PROSLIDER is a sloping terminal transition profile in stainless steel AISI 304/1.4301-V2A designed to join different height floors in a perfect, stepless way. This particularly sturdy profile with the bent base sloping inwards withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor. Available in AISI 304/1.4301-V2A stainless steel in various heights to accommodate all differences in level.

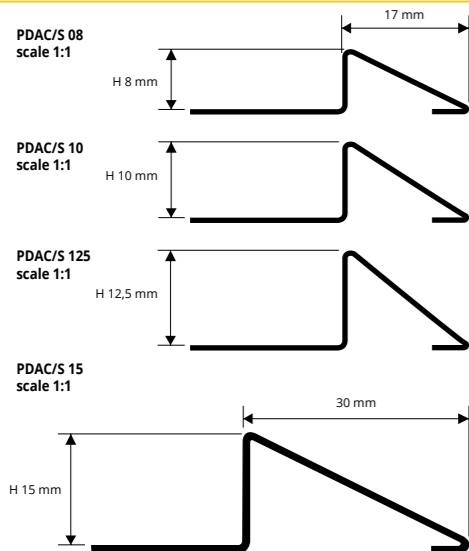

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm


Article	H mm	€/lm	€/Pc
PDAC 08	8	11,09	29,94
PDAC 10	10	11,99	32,37
PDAC 125	12,5	13,71	37,02
PDAC 15	15	17,14	46,28



SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PDACS 08	8	13,80	37,26
PDACS 10	10	14,60	39,42
PDACS 125	12,5	17,40	46,98
PDACS 15	15	18,50	49,95

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

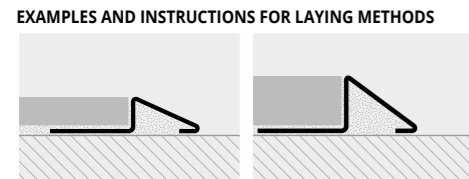


1. Choose the profile with the required height and finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the "PROSLIDER". 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices.

COLOURS

PROSLIDER

POLISHED AND NATURAL BRASS

PROSLIDER is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor. Available in natural and polished brass in various heights to accommodate all differences in level.

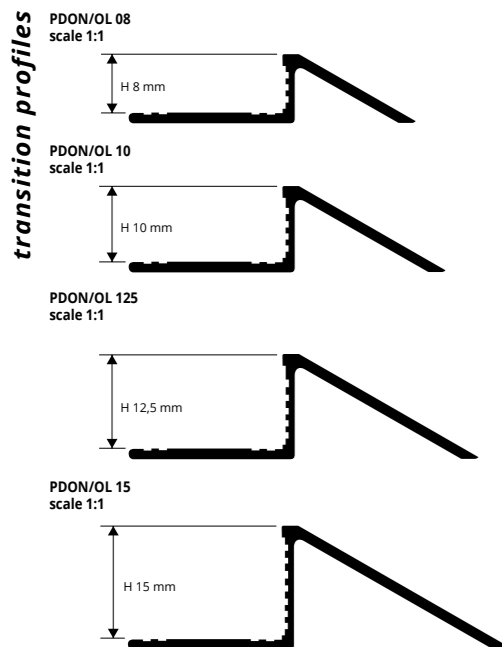

NATURAL BRASS thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PDON 08	8	11,26	30,40 *
PDON 10	10	12,93	34,91
PDON 125	12,5	16,15	43,61 *
PDON 15	15	19,73	53,27 *




POLISHED BRASS thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PDOL 08	8	14,36	38,77 *
PDOL 10	10	16,03	43,28
PDOL 125	12,5	19,24	51,95 *
PDOL 15	15	22,54	60,86 *

INSTRUCTIONS FOR LAYING
1. Choose the profile with the required height H, material and finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the "PROSLIDER". 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices. Oxidation marks on profiles in natural and polished brass may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

COLOURS

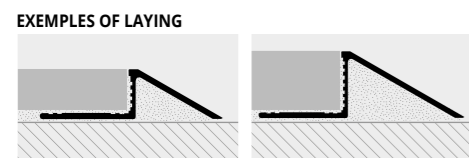

* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs; 100% increase for minimum orders of 10 Pcs; 120% increase for orders of 15 Pcs; 140% increase for orders of 20 Pcs.

PROSLIDER

NATURAL ALUMINIUM AND ANODIZED SILVER ALUMINIUM

PROSLIDER is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor. Available in natural and anodized silver aluminium in various heights to accommodate all differences in level.



NATURAL ALUMINIUM thermo packed 5 Pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm	€/lm	€/Pc
PDAN 08	8	3,70	9,99
PDAN 10	10	4,18	11,29
PDAN 125	12,5	4,86	13,12




ANODIZED SILVER ALUMINIUM thermo packed 5 Pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PDAA 08	8	5,35	14,45
PDAA 10	10	5,72	15,44
PDAA 125	12,5	6,24	16,85

COLOURS

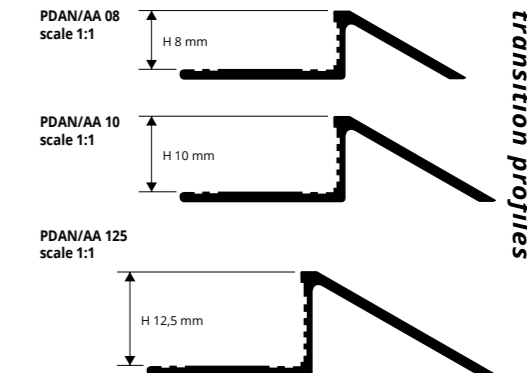

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

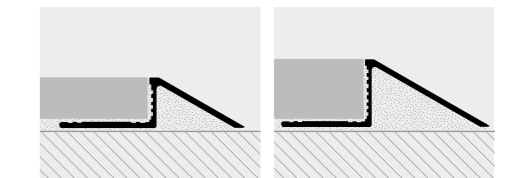

1. Choose the profile with the required height H, material and finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the "PROSLIDER". 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices.

PROSLIDER LR is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER LR** is used in particular to join tile or wood to an existing floor. Available in natural and anodized silver aluminium in various heights to accommodate all differences in level.

PROSLIDER LR

NATURAL ALUMINIUM AND ANODIZED SILVER ALUMINIUM



NATURAL ALUMINIUM thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm	€/lm	€/Pc
PDLRAN 10	10	10,63	28,70
PDLRAN 125	12,5	13,23	35,72
PDLRAN 15	15	15,18	40,99




ANODIZED SILVER ALUMINIUM thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PDLRAA 10	10	13,85	37,40
PDLRAA 125	12,5	15,60	42,12
PDLRAA 15	15	17,93	48,41

COLOURS

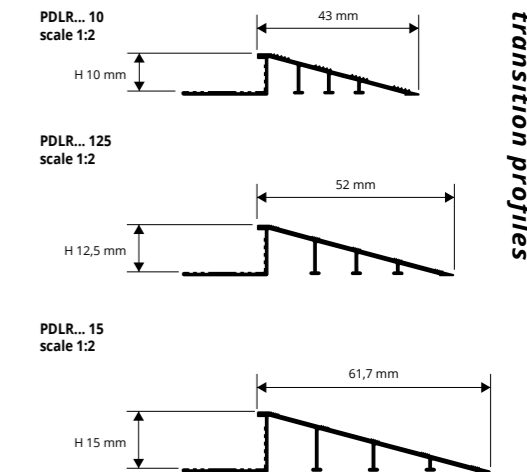

EXAMPLES OF LAYING

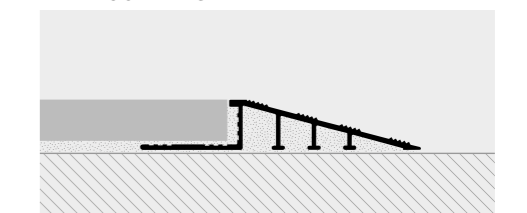

INSTRUCTIONS FOR LAYING
1. Choose the profile with the required height H, material and finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the "PROSLIDER LR". 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices.

Prices are referred to whole packs; 100% increase for minimum orders of 10 Pcs; 120% increase for orders of 15 Pcs; 140% increase for orders of 20 Pcs.


© 2010 All rights reserved by Progress Profiles. Printed in Italy

© 2010 All rights reserved by Progress Profiles. Printed in Italy

PROSLIDER WOOD

NATURAL OAK WITH ALUMINIUM BASE

PROSLIDER WOOD is a sloping terminal transition profile in real natural oak with glued-on, punched aluminium base, designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. Available in various heights to accommodate all differences in level.

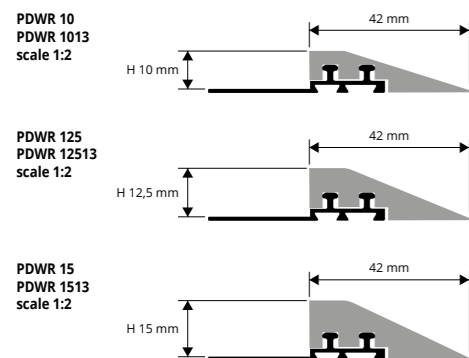


NATURAL OAK with ALUMINIUM BASE
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PDWR 10	10	18,75	50,63 *
PDWR 125	12,5	21,90	59,13 *
PDWR 15	15	26,23	70,82 *


NATURAL OAK with ALUMINIUM BASE
bar length 1,35 lm - pack. 20 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PDWR 1013	10		27,82 *
PDWR 12513	12,5		32,52 *
PDWR 1513	15		35,43 *

COLOURS



EXEMPLES OF LAYING

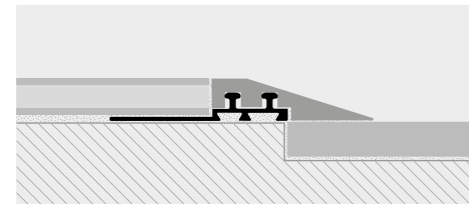

INSTRUCTIONS FOR LAYING

1. Choose the "PROSLIDER WOOD" with the required height. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices.

PROCARPET ACC

STAINLESS STEEL AISI 304/1.4301-V2A

PROCARPET ACC is a profile in stainless steel 304/1.4301-V2A used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect joint thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.




POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PRTAC 08	8	9,06	24,46 *
PRTAC 10	10	9,95	26,87 *
PRTAC 125	12,5	12,80	34,56 *

SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PRTACS 08	8	11,32	30,56 *
PRTACS 10	10	12,43	33,56 *
PRTACS 125	12,5	15,98	43,15 *


COLOURS




INSTRUCTIONS FOR LAYING

1. Choose the "PROCARPET ACC" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

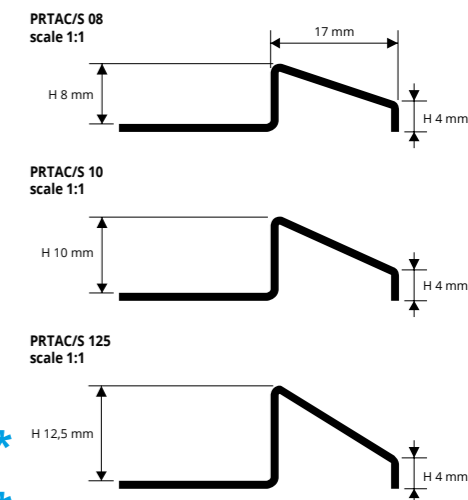

EXEMPLES OF LAYING

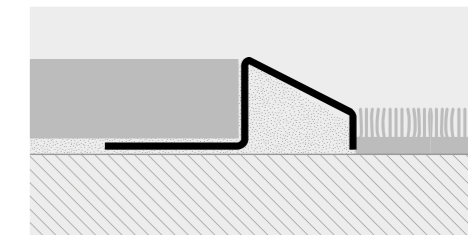

PROCARPET OTT is a profile in brass (natural or polished) used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect joint thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.

PROCARPET OTT

POLISHED AND NATURAL BRASS




NATURAL BRASS thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRTON 08	8	12,32	33,26 *
PRTON 10	10	13,99	37,77 *

POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRTOL 08	8	15,40	41,58 *
PRTOL 10	10	17,08	46,12 *


COLOURS



INSTRUCTIONS FOR LAYING

1. Choose the "PROCARPET OTT" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids. Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and.

EXEMPLES OF LAYING

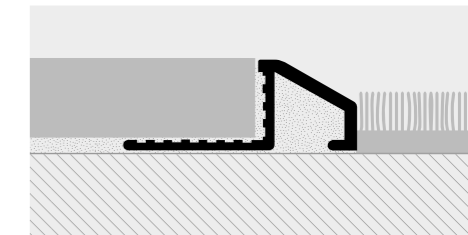

transition profiles

transition profiles

© 2010 All rights reserved by Progress Profiles. Printed in Italy


© 2010 All rights reserved by Progress Profiles. Printed in Italy

PROCARPET ALL

NATURAL AND ANODIZED SILVER ALUMINIUM

PROCARPET ALL is a profile in aluminium (natural or silver anodized) used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect joint thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.

transition profiles

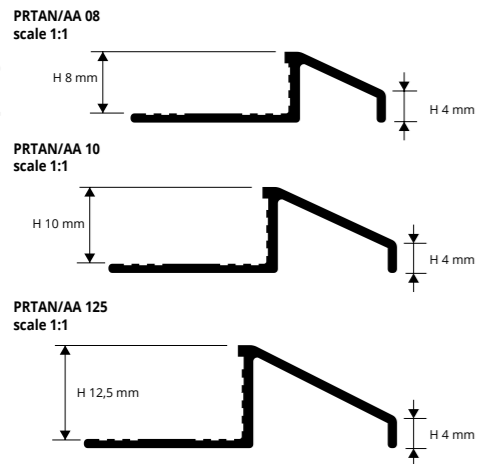

NATURAL ALUMINIUM thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRTAN 08	8	3,79	10,23
PRTAN 10	10	4,27	11,53
PRTAN 125	12,5	4,92	13,28


ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRTAA 08	8	4,44	11,99
PRTAA 10	10	5,23	14,12
PRTAA 125	12,5	6,19	16,71

INSTRUCTIONS FOR LAYING
1. Choose the "PROCARPET ALL" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

COLOURS

AN - Natural alum.	AA - Anodized silver alum.
--------------------	----------------------------

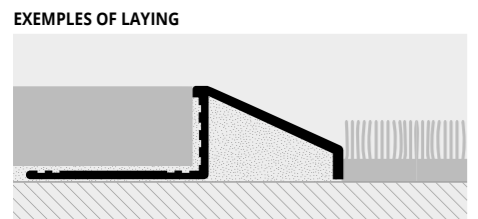


PROSKID

POLISHED BRASS AND ANODIZED SILVER ALUMINIUM

PROSKID is a sloping profile ideal for the stepless joining of two existing floors of differing heights where no transition profile was installed at the time of laying. Silicone is used for the laying. The notching on the profile helps anchorage of the silicone or adhesive. Hardwearing and attractive.

transition profiles

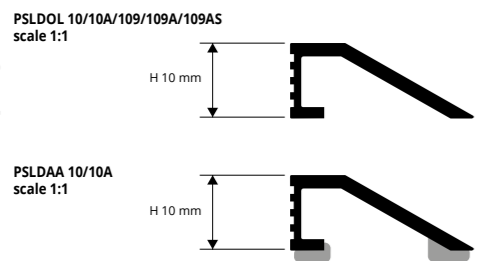

POLISHED BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PSLDOL 10	10	15,13	40,85 *
PSLDOL 10A (with adhesive)	10	16,72	45,14 *

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PSLDAA 10	10	4,92	13,28
PSLDAA 10A (with adhesive)	10	6,03	16,28

POLISHED BRASS thermo packed
bar length 0,90 lm - pack. 20 Pcs


Article	H mm	€/lm	€/Pc
PSLDOL 109AS (with adhesive)	10		18,83

COLOURS

OL - Polished brass	AA - Anodized silver alum.
---------------------	----------------------------

POLISHED BRASS thermo packed
bar length 0,90 lm - pack. 20 Pcs

Article	H mm	€/lm	€/Pc
PSLDOL 109	10		16,50
PSLDOL 109A (with adhesive)	10		17,77

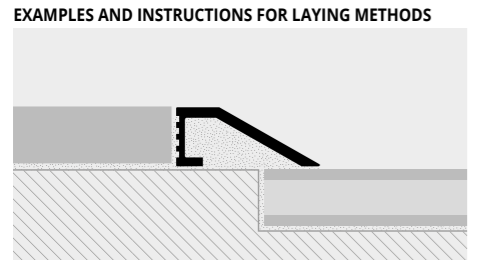


1. Choose the "PROSKID" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

PROLEVALL 29

ANODIZED ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED

PROLEVALL 29 is a transition profile in anodized aluminium, available in the self-adhesive or punched versions. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 4 and 6mm. **PROLEVALL 29** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

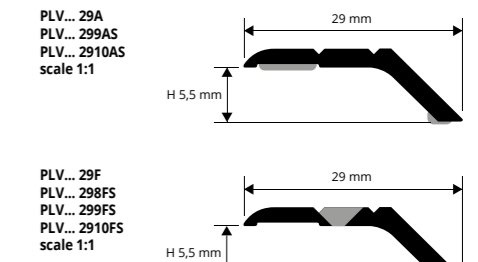

ANODIZED ALUM. with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLV... 29A	5,5 X 29	5,23	14,12

ANODIZED ALUM. punched thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLV... 29F	5,5 X 29	4,07	10,99

ANODIZED ALUM. with adhesive thermo packed
bar length 0,83 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLV... 298AS	5,5 X 29	5,13	4,77 *

ANODIZED ALUM. punched with screws and screw anchors thermo packed
bar length 0,83 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLV... 298FS	5,5 X 29	4,77	4,77 *

ANODIZED ALUM. with adhesive thermo packed
bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLV... 299AS	5,5 X 29	5,77	5,77

ANODIZED ALUM. punched with screws and screw anchors thermo packed
bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLV... 299FS	5,5 X 29	4,86	4,86

ANODIZED ALUM. with adhesive thermo packed
bar length 1,03 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLV... 2910AS	5,5 X 29	6,29	6,29

ANODIZED ALUM. punched with screws and screw anchors thermo packed
bar length 1,03 lm - pack. 20 Pc


Article	H x L mm	€/lm	€/Pc
PLV... 2910FS	5,5 X 29	5,40	5,40

Available in the colours: AA - AO (AB, AT, CH e SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 29A (chosen colour anodized gold alum.) PLVAO 29A.

COLOURS

AA - Anodized silver alum.	AO - Anodized gold alum.	AB - Anodized bronze alum.	AT - Anodized titanium alum.	CH - Anod. champagne alum.	SB - Anodized sand alum.
----------------------------	--------------------------	----------------------------	------------------------------	----------------------------	--------------------------

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height
(price and delivery time to be agreed)

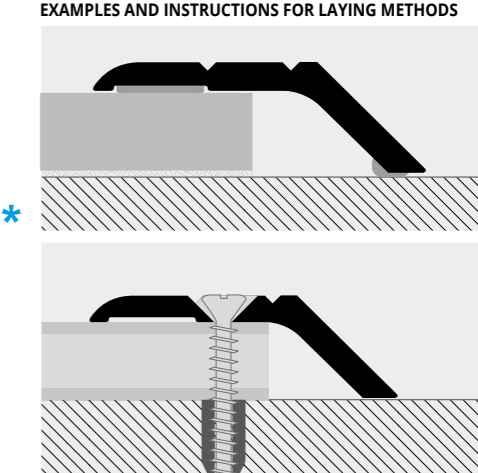

Adhesive version
1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
1. Choose the suitable profile and cut it to the necessary length. 2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 33 is a transition profile in extruded polished brass, available in the self-adhesive or punched versions. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 4 and 6mm. **PROLEVALL 33** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 33

POLISHED BRASS WITH SELF-ADHESIVE AND PUNCHED

POLISHED BRASS with adhesive thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PLVOL 33A	5,5 X 33	13,11	35,40 *

POLISHED BRASS punched thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PLVOL 33F	5,5 X 33	11,69	31,56 *

POLISHED BRASS with adhesive thermo packed
bar length 0,83 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVOL 338AS	5,5 X 33	11,85	11,85 *

POLISHED BRASS punched with screws and screw anchors thermo packed
bar length 0,83 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVOL 338FS	5,5 X 33	11,00	11,00 *

POLISHED BRASS with adhesive thermo packed
bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVOL 339AS	5,5 X 33	13,23	13,23 *

POLISHED BRASS punched with screws and screw anchors thermo packed
bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVOL 339FS	5,5 X 33	12,16	12,16 *

POLISHED BRASS with adhesive thermo packed
bar length 1,03 lm - pack. 20 Pc



Article	H x L mm	€/lm	€/Pc
PLVOL 3310AS	5,5 X 33	14,60	14,60 *

POLISHED BRASS punched with screws and screw anchors thermo packed
bar length 1,03 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVOL 3310FS	5,5 X 33	13,23	13,23 *

COLOURS

OL - Polished brass

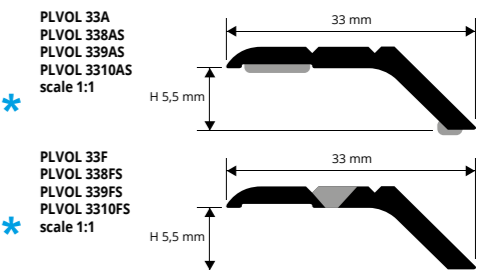


Adhesive version
1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
1. Choose the suitable profile and cut it to the necessary length. 2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.


PROLEVALL 305

POLISHED STAINLESS STEEL 1.4016 AND POLISHED BRASS WITH SELF-ADHESIVE AND PUNCHED

transition profiles

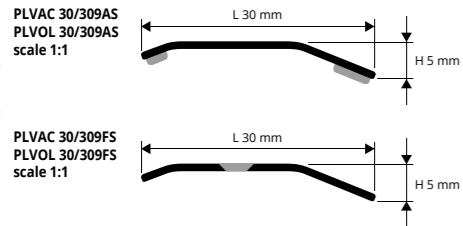

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

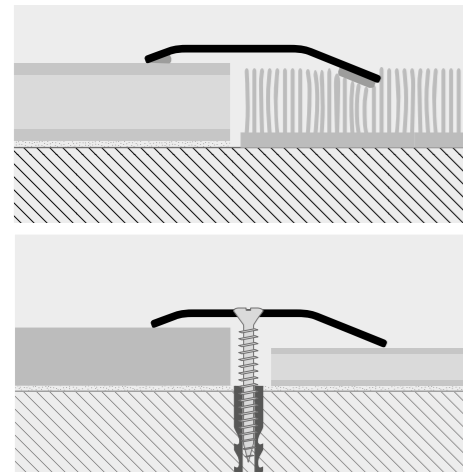

Adhesive version
 1. Choose the suitable profile and cut it to the necessary length.
 2. Degrease, wash and clean the solid surface thoroughly.
 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version
 1. Choose the suitable profile and cut it to the necessary length.
 2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 305 is a transition/terminal profile for floors of medium thickness (from 3 to 7 mm), used to join and compensate two floors of differing height, material and thickness. Ideal as a finishing terminal, it covers flaws and chipping or splintering of tiles, wood and carpeting. Available in stainless steel 1.4016 and polished brass. A protective film protects the finish of the 2.70 m long bars with either self-adhesive backing or punched for fixing with screws and anchors. The 93 cm blister pack version (self pack) is shrink-wrapped with bar code.



POLISHED STAINLESS ST. 1.4016 with adhesive thermo packed
 bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLVAC 30A	5 X 30	5,63	15,20

POLISHED STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVAC 309AS	5 X 30		6,90


POLISHED BRASS with adhesive thermo packed
 bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLVOL 30A	5 X 30	7,46	20,14

POLISHED BRASS with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVOL 309AS	5 X 30		7,93

COLOURS



POLISHED STAINLESS ST. 1.4016 punched with protective film
 bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLVAC 30F	5 X 30	4,38	11,83

POL. STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVAC 309FS	5 X 30		5,94

POLISHED BRASS punched with protective film
 bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLVOL 30F	5 X 30	6,04	16,31

POL. BRASS punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pc


Article	H x L mm	€/lm	€/Pc
PLVOL 309FS	5 X 30		6,75

ON DEMAND HAND-BRUSHED STAINLESS STEEL
 (prices and delivery time to be agreed)


PROLEVALL 32

ANODIZED ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED

transition profiles



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

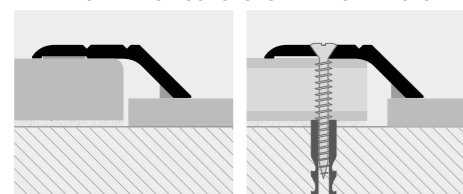

Adhesive version
 1. Choose the suitable profile and cut it to the necessary length.
 2. Degrease, wash and clean the solid surface thoroughly.
 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version
 1. Choose the suitable profile and cut it to the necessary length.
 2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 32 are transition profiles in anodized aluminium, available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 7 and 9 mm. PROLEVALL 32 ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.



ANODIZED SILVER and GOLD ALUMINIUM thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PLV... 32A (with adhesive)	32 X 8	6,66	17,98
PLV... 32F (punched)	32 X 8	4,44	11,99



ANODIZED SILVER and GOLD ALUMINIUM thermo packed - bar length 0,93 lm - pack. 20 Pc


Article	L x H mm	€/ml	€/Pc
PLV... 329AS (with adhesive)	32 X 8		6,77
PLV... 329FS (punched)	32 X 8		5,13

Available in the colours: AA - AO (AB - AT, CH e SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 32F (chosen colour Anodized gold alum.) PLVAO 32F.

COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROLEVALL 358

POLISHED BRASS WITH SELF-ADHESIVE AND PUNCHED

FLOORS

PROLEVALL 358 are transition profiles in polished extruded brass, available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 7 and 9 mm. PROLEVALL 358 ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.



POLISHED BRASS thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm (PLVOL 358F: 15 Pcs - 40,5 lm)


Article	L x H mm	€/lm	€/Pc
PLVOL 358A (with adhesive)	35 X 8	18,73	50,57
PLVOL 358F (punched)	35 X 8	17,40	46,98




POLISHED BRASS thermo packed - bar length 0,90 lm - pack. 20 Pc

Article	L x H mm	€/Pc
PLVOL 3589AS (with adhesive)	35 X 8	17,88
PLVOL 3589FS (punched with screws and screw anchors)	35 X 8	16,72

COLOURS

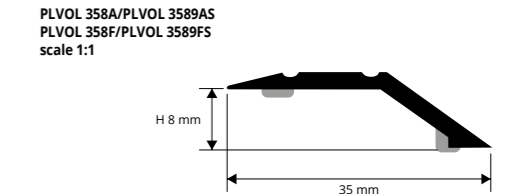


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

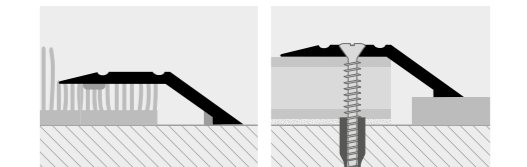

Adhesive version
 1. Choose the suitable profile and cut it to the necessary length.
 2. Degrease, wash and clean the solid surface thoroughly.
 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version
 1. Choose the suitable profile and cut it to the necessary length.
 2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 4413 are transition profiles in polished extruded brass and anodized aluminium, available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 13 and 15 mm. PROLEVALL 4413 ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

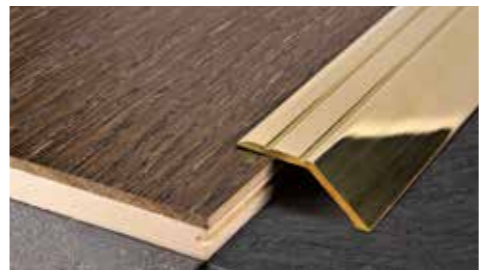

POLISHED BRASS thermo packed
 bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	L x H mm	€/lm	€/Pc
PLVOL 4413A (with adhesive)	44 X 13	21,48	58,00
PLVOL 4413F (punched)	44 X 13	19,78	53,41



ANODIZED SILVER and GOLD ALUMINIUM thermo packed
 bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	L x H mm	€/lm	€/Pc
PLV... 4413A (with adhesive)	44 X 13	8,35	22,55
PLV... 4413F (punched)	44 X 13	7,30	19,71

Available in the colours: AA - AO (OL, AT, CH e SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 4413F (chosen colour anodized gold alum.) PLVAO 4413F.


POLISHED BRASS thermo packed - bar length 0,90 lm - pack. 20 Pc

Article	L x H mm	€/Pc
PLVOL 44139AS (with adhesive)	44 X 13	20,10
PLVOL 44139FS (punched with screws and screw anchors)	44 X 13	19,04

COLOURS





AVAILABLE MINIMUM QUANTITY 100 PCS by color and height




PROLEVALL 4413

POLISHED BRASS AND ANODIZED SILVER ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED

transition profiles

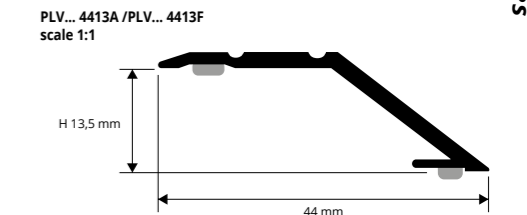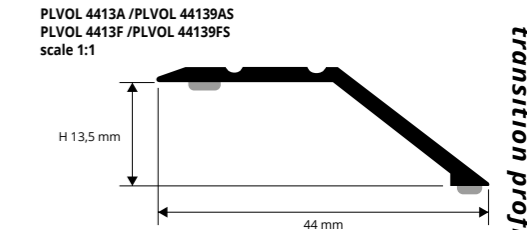

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

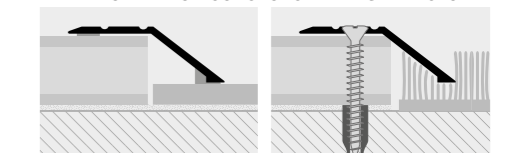

Adhesive version
 1. Choose the suitable profile and cut it to the necessary length.
 2. Degrease, wash and clean the solid surface thoroughly.
 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version
 1. Choose the suitable profile and cut it to the necessary length.
 2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PRONIVO


ANODIZED GOLD AND SILVER ALUMINIUM

PRONIVO is a transition and edging profile with a rounded shape in anodized aluminium with tap-down edge. It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 7 and 13 mm where no profile was installed at the time of laying. **PRONIVO** ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.

transition profiles

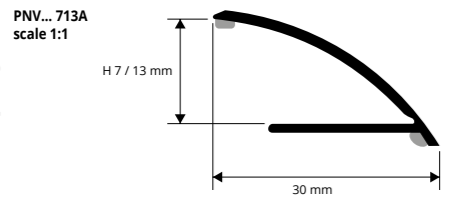

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

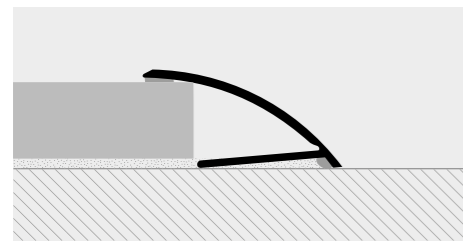

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.



ANODIZED ALUMINIUM self-adhesive thermo packed
bar length 2,7 lm - pack. 30 Pcs - 81 lm

Article	H mm	€/lm	€/Pc
PNVAA 713A	7/13	5,82	15,71


Available in the colours: AA (AO available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PNV... 713 (chosen colour anodized gold alum.) PNVAA 713A.



COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by color and height




(price and delivery time to be agreed)

PROTRANS


ANODIZED GOLD AND SILVER ALUMINIUM

PROTRANS is a transition and edging profile with a rounded shape in anodized aluminium. It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 7 and 13 mm where no profile was installed at the time of laying. **PROTRANS** ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.

transition profiles

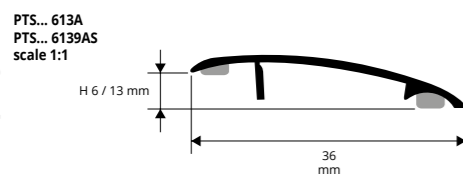

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

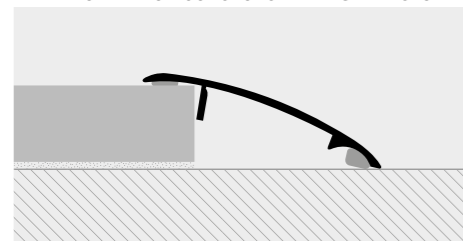

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.



ANODIZED ALUMINIUM self-adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm	€/lm	€/Pc
PTSAA 613A	6 / 13	5,55	14,99

Available in the colours: AA (AO, AT, CH e SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PTS... 613A (chosen colour anodized gold alum.) PTSAA 613A.

COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



(price and delivery time to be agreed)



ANODIZED ALUMINIUM self-adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs

Article	H mm	€/lm	€/Pc
PTS... 6139AS	6 / 13		5,87

PROFLOOR 712

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A WITH SELF-ADHESIVE

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in polished stainless steel with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFRAC 7129AS	38 X 7/12	7,43	20,06

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 1,66 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFRAC 71216AS	38 X 7/12	13,81	

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 ml - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PFRAC 712A	38 X 7/12	7,43	20,06

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,83 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFRAC 7128AS	38 X 7/12	7,07	

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 1,03 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFRAC 71210AS	38 X 7/12	8,62	

COLOURS



On demand hand-brushed stainless steel (Prices and delivery time to be agreed)

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED BRASS self-adhesive thermo packed bar length 0,93 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFROL 7129AS	38 X 7/12	9,84	26,57

POLISHED BRASS self-adhesive thermo packed bar length 1,66 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFROL 71216AS	38 X 7/12	17,77	

POLISHED BRASS self-adhesive thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PFROL 712A	38 X 7/12	9,84	26,57


POLISHED BRASS self-adhesive thermo packed bar length 0,83 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFROL 7128AS	38 X 7/12	8,99	


POLISHED BRASS self-adhesive thermo packed bar length 1,03 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFROL 71210AS	38 X 7/12	11,10	

COLOURS

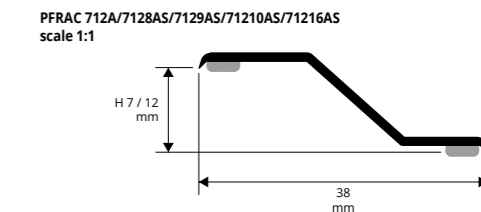

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

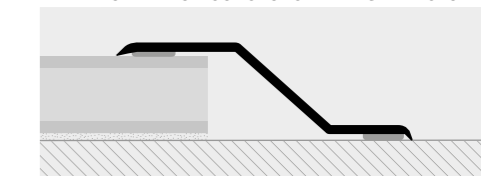

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROFLOOR 712

POLISHED BRASS WITH SELF-ADHESIVE

© 2019 All rights reserved by Progress Profiles. Printed in Italy

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in anodized aluminium with silver-gold-bronze finish with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



Anodized ALUMINIUM self-adhesive thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	L x H mm	€/lm	€/Pc
PFR... 712A	38 X 7/12	5,60	15,12

Available in the colours: AA - AO - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PFR... 712A (chosen colour anodized gold alum.) PFRAO 712A.




Anodized ALUMINIUM self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFR... 7129AS	38 X 7/12		6,29

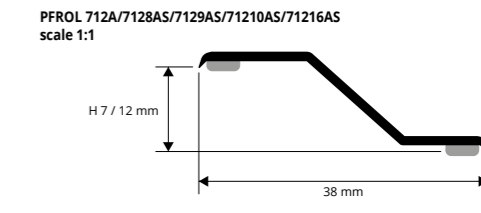


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

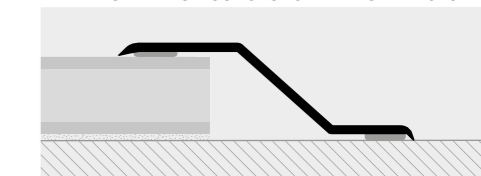

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROFLOOR 712

ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM WITH SELF-ADHESIVE

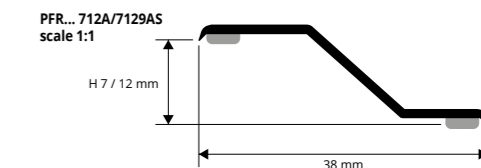

COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



(price and delivery time to be agreed)

transition profiles


transition profiles

transition profiles


PROGRESS 712

POLISHED STAINLESS STEEL AISI 304/1.4301 AND POLISHED BRASS WITH SELF-ADHESIVE

transition profiles

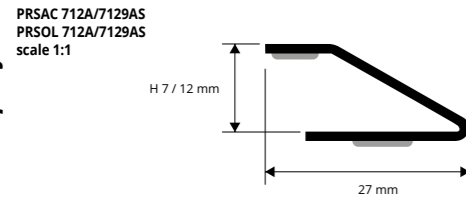

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

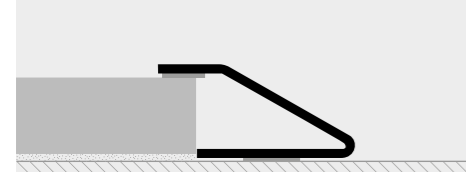

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.


PROGRESS 712 is a self-adhesive sloping terminal transition profile in stainless steel 1.4301 and polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 7 and 12mm.

PROGRESS 712 ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.




POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PRSA 712A	27 X 7/12	9,84	26,57

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs 


Article	L x H mm	€/lm	€/Pc
PRSA 7129AS	27 X 7/12	10,79	

COLOURS



POLISHED BRASS self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PRSA 712A	27 X 7/12	11,59	31,29

POLISHED BRASS self-adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs 

Article	L x H mm	€/lm	€/Pc
PRSA 7129AS	27 X 7/12	11,85	


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

On demand hand-brushed stainless steel (prices and delivery time to be agreed)


PROFLOOR 1216

POLISHED STAINLESS STEEL AISI 304/1.4301 AND POLISHED BRASS WITH SELF-ADHESIVE

transition profiles

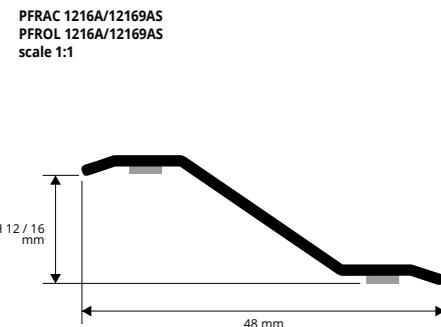

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

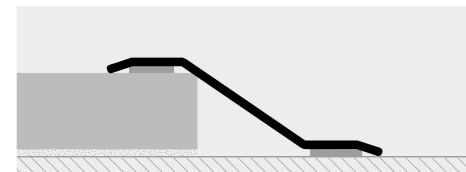


1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROFLOOR 1216 is a self-adhesive chamfered terminal transition profile in stainless steel AISI 304/1.4301-V2A and polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 12 and 16mm. **PROFLOOR 1216** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PFRAC 1216A	48 X 12/16	11,36	30,67

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs 

Article	L x H mm	€/lm	€/Pc
PFRAC 12169AS	48 X 12/16	11,14	


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

On demand hand-brushed stainless steel (prices and delivery time to be agreed)




POLISHED BRASS self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PFRAC 1216A	48 X 12/16	14,91	40,26

POLISHED BRASS self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs 

Article	L x H mm	€/lm	€/Pc
PFRAC 12169AS	48 X 12/16	14,98	


COLOURS



PROLINOLEUM is a self-adhesive transition profile in anodized aluminium with gold/silver finish. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC or linoleum and other thin materials between 2-3 mm thick. **PROLINOLEUM** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROLINOLEUM

ANODIZED GOLD AND SILVER ALUMINIUM WITH AND WITHOUT SELF-ADHESIVE

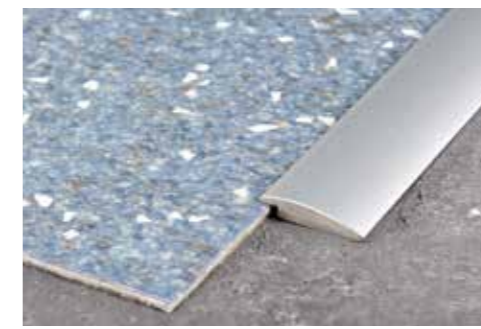


ANODIZED GOLD AND SILVER ALUMINIUM thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLU ... 16 (without adhesive)	2,5 X 16	3,39	9,15
PLU ... 16A (with adhesive)	2,5 X 16	4,28	11,56

Available in the colours: AA (AO, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLU ... 16 (chosen finish anod. gold) PLUAO 16.


COLOURS




AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



PLU ... 16
PLU ... 16A
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

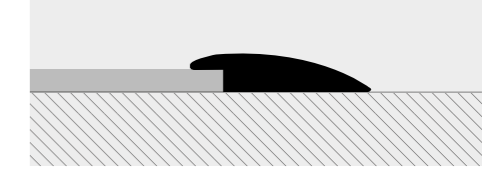

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROFLOOR 24 is a self-adhesive transition profile with chamfered edges in stainless steel 1.4016 and polished brass with protective film. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC and linoleum - carpeting and other thin materials between 2 and 5mm thick. **PROFLOOR 24** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.


PROFLOOR 24

POLISHED STAINLESS STEEL AISI 304/1.4301 AND POLISHED BRASS WITH SELF-ADHESIVE



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PFRAC 24A	2/4,5 X 30	5,63	15,20


POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs 

Article	H x L mm	€/lm	€/Pc
PFRAC 249AS	2/4,5 X 30	6,20	


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

On demand hand-brushed stainless steel (prices and delivery time to be agreed)

PFRAC 24A/249A
PFRAC 24A/249A
scale 1:1




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

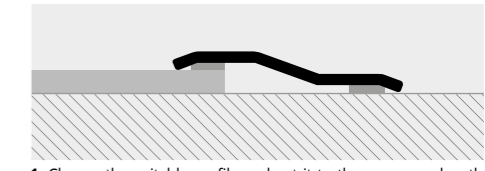

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

POLISHED BRASS self-adhesive thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PFRAC 24A	2/4,5 X 30	7,46	20,14

POLISHED BRASS self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs 

Article	H x L mm	€/lm	€/Pc
PFRAC 249AS	2/4,5 X 30	7,93	

COLOURS




PROSLIDER KL ALL

ANODIZED SILVER ALUMINIUM

PROSLIDER KL ALL is a slide shape progressive transition terminal square suitable for connecting perfectly without steps two floor levels. The particular strength of the square allows to resist and bear heavy loads and frequent passages of manual trolleys and motor vehicles besides protecting the edge of the higher floor. The **PROSLIDER KL ALL** is especially used to connect LA Kerlite/Laminam and thin ceramic tiles to each other or else it is used with wood and/or a pre-existing floor. Available in anodized aluminium.

profiles for low thicknesses

PDKLAA 045
scale 1:1

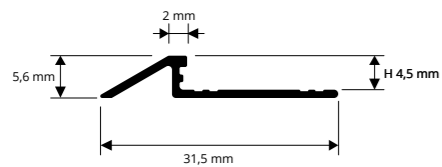

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm	€/lm	€/Pc
PDKLAA 045	4,5	5,13	13,85

COLOURS



AA - Anodized silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the profile with the required finish.
2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application.
3. Lay the "PROSLIDER KL ALL".
4. Align it flush with the floor/covering.
5. Use the adhesive to seal any empty interstices.


PROCOVER 1045 ALL

ANODIZED AND POLISHED SILVER, CHROME AND GOLD ALUMINIUM

PROCOVER 1045 ALL is a joint cover profile in anodized aluminium. It is applied at the end of the laying process between two adjoining floors placed at the same level, with a gap of 3 to 6 mm between the two kerlite /laminam/ or thin ceramic tile floors laid with the adhesive. It protects the external edge of the floor/covering. It is easy to lay and aesthetically pleasing. The design of the profile with lower vertical arrowhead part allows excellent anchorage with silicone / adhesive.

profiles for low thicknesses

PCR...1045
scale 1:1



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PCRAA 1045	4,5	2,80	7,56

POLISHED CHROME/GOLD ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PCRBC 1045	4,5	4,81	12,99
PCRBO 1045	4,5	4,81	12,99

COLOURS



AA - Anodized silver alum. BC - Polished chrome alum. BO - Polished gold alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



INSTRUCTIONS FOR LAYING

1. Choose "PROCOVER 1045 ALL" in the desired finish considering a side lap of 2/3 mm.
2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor.
3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

IMPORTANT: Take care of the external edges of the aluminium "PROCOVER 1045 ALL". They must be protected from aggressive substances such as adhesives and sealants and from smoothing or scraping action.

© 2010 All rights reserved by Progress Profiles, Printed in Italy

© 2010 All rights reserved by Progress Profiles, Printed in Italy

FLOORS




FLOORS

PROCOVER

POLISHED AND SATIN FINISH
STAINLESS STEEL AISI 304/1.4301-V2A

PROCOVER is a joint-cover profile in stainless steel (polished or satin finish) with aluminium supports. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive. The aluminium structure with the stainless steel lining provides it with a high level of resistance to cuts and deformation.

threshold - joint-cover profiles

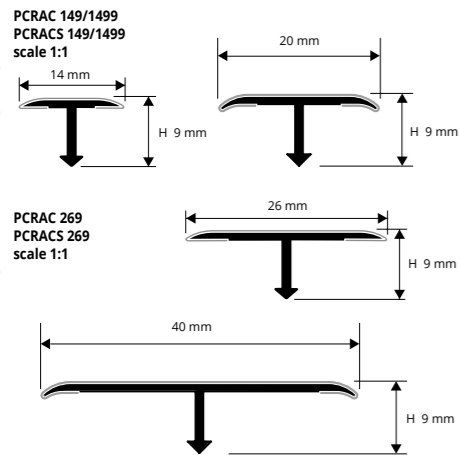

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film - bar length 2,7 lm (PCRAC 1499 - bar length 0,90 lm)

Article	L x H mm	€/lm	€/Pc
PCRAC 149 (Pack. 108 lm)	14 X 9	8,99	24,27
PCRAC 1499 (Pack. 20 Pcs)	14 X 9		9,09
PCRAC 209 (Pack. 40 Pcs)	20 X 9	11,70	31,59
PCRAC 269 (Pack. 81 lm)	26 X 9	12,85	34,70
PCRAC 409 (Pack. 20 Pcs)	40 X 9	17,18	46,39

COLOURS

AC - Polished stainless steel AISI 304/1.4301-V2A	ACS - Satin finish stainless steel AISI 304/1.4301-V2A
---	--



SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A with protective film - bar length 2,7 lm (PCRACS 1499 - bar length 0,90 lm - pack. 20 Pcs)

Article	L x H mm	€/lm	€/Pc
PCRACS 149 (Pack. 108 lm)	14 X 9	11,36	30,67
PCRACS 1499 (Pack. 20 Pcs)	14 X 9		11,15
PCRACS 209 (Pack. 40 Pcs)	20 X 9	12,91	34,86
PCRACS 269 (Pack. 81 lm)	26 X 9	16,16	43,63
PCRACS 409 (Pack. 20 Pcs)	40 X 9	19,48	52,60


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROCOVER

POLISHED, CHROMED AND ANTIQUE BRASS

PROCOVER is a joint-cover profile in polished, chromed and antique brass. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

threshold - joint-cover profiles

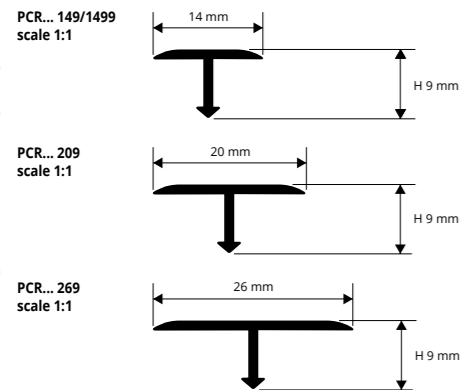

POLISHED BRASS thermo packed - bar length 2,7 lm (PCROL 1499 - bar length 0,90 lm - pack. 40 Pcs)

Article	L x H mm	€/lm	€/Pc
PCROL 149 (Pack. 108 lm)	14 X 9	5,93	16,01
PCROL 1499 (Pack. 40 Pcs)	14 X 9		6,34
PCROL 209 (Pack. 81 lm)	20 X 9	8,93	24,11
PCROL 269 (Pack. 54 lm)	26 X 9	10,79	29,13

COLOURS

OL - Polished brass	OC - Chromed brass	OB - Antique brass
---------------------	--------------------	--------------------




CHROMED BRASS (polished stainless st. effect) thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PCROC 149 (Pack. 108 lm)	14 X 9	11,87	32,05
PCROC 209 (Pack. 81 lm)	20 X 9	13,84	37,37
PCROC 269 (Pack. 54 lm)	26 X 9	16,40	44,28

ANTIQU BRASS thermo packed bar length 2,7 lm

Article	L x H mm	€/lm	€/Pc
PCROB 149 (Pack. 108 lm)	14 X 9	19,00	51,30
PCROB 209 (Pack. 81 lm)	20 X 9	21,50	58,05
PCROB 269 (Pack. 54 lm)	26 X 9	23,75	64,13

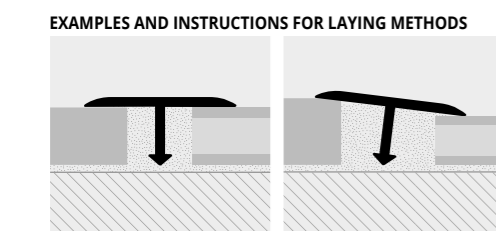

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined. Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

News 2019

* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

PROCOVER

ANODIZED SILVER, DARK BRONZE ALUMINIUM

PROCOVER is a joint-cover profile in anodized aluminium. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.



ANODIZED SILVER, DARK BRONZE ALUMINIUM thermo packed - bar length 2,7 lm (PCRAA 1499 - bar length 0,90 lm - pack. 40 Pcs)



Article	L x H mm	€/lm	€/Pc
PCRAA 149 (pack. 40 Pcs)	14 X 9	3,22	8,69
PCRDB 149 (pack. 40 Pcs)	14 X 9	4,11	11,10
PCRAA 1499 (pack. 40 Pcs)	14 X 9		3,81
PCRAA 209 (pack. 40 Pcs)	20 X 9	3,44	9,29
PCRDB 209 (pack. 40 Pcs)	20 X 9	4,47	12,07
PCRAA 269 (pack. 40 Pcs)	26 X 9	4,28	11,56
PCRDB 269 (pack. 40 Pcs)	26 X 9	5,57	15,04
PCRAA 409 (pack. 40 Pcs)	40 X 9	6,29	16,98
PCRDB 409 (pack. 40 Pcs)	40 X 9	8,18	22,09

COLOURS

AA - Anodized silver alum.	DB - Anod. dark bronze alum.
AT - Anodized titanium alum.	AB - Anodized bronze alum.
AO - Anodized gold alum.	

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height
Available on demand PCRAA, PCRAB and PCRAO. Price: add +20% to the price of PCRAA.

* PCRAA - DB 149 curvable. (See pag. 106)

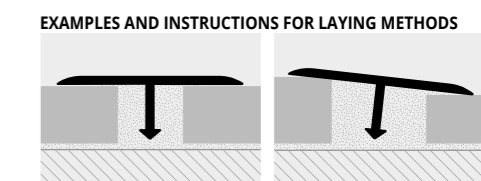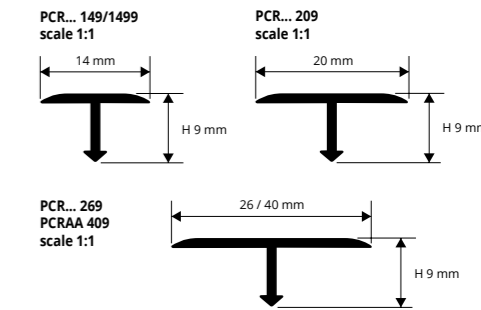

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

PROCOVER WOOD is a joint-cover profile in aluminium covered with a very strong film available in 10 wood finishes. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

PROCOVER WOOD

ALUMINIUM COVERED WITH PROTECTIVE FILM IN 10 WOOD FINISHES

ALUMINIUM 10 WOOD FINISHES thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 26 mm - 54 lm)

Article	L x H mm	€/lm	€/Pc
PCRA... 149	14 X 9	5,21	14,07
PCRA... 269	26 X 9	9,16	24,73



Available in the wood finishes: 05W - 11W - 28W - 29W - 30W. On demand 04W-07W-08W-09W-10W (Available minimum quantity 100 pcs) The code of the selected colour must be added to the article code. Es.: PCRA... 149 (chosen finish light oak) PCRA04W 149.



COLOURS

05W - Light oak (strip)	11W - Decapè bleached	28W - Aspen oak	29W - White oak	30W - Grey oak
04W - Dark beech	07W - Light cherry (strip)	08W - Dark cherry (board)	09W - Red walnut (merbau-apple-walnut)	10W - Wengè (panga-panga - wengè)

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height (price and delivery time to be agreed)

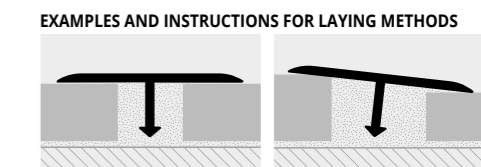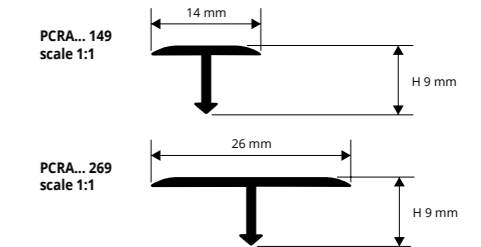

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

PROCOVER INSERT for inserting Procover profiles

VINYL RESIN / BLACK RUBBER



Vinyl resin/rubber profile "U-form" for inserting PROCOVER with PINBFT 45 or PINBFT 40 Proinsert System base.

VINYL RESIN/RUBBER length 2,7 lm and/or in rolls 100 lm

Article	€/lm	€/Pc	€/roll
PCPCR 2,7ML	3,16	8,53	
PCPCR 100ML	3,16		316,00

PROINSERT BASE 45 AND BASE 40 - alum. punched - perforated bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	Width. mm	€/lm	€/Pc
PINBFT 45	45	5,03	13,58
PINBFT 40	40	4,96	13,39

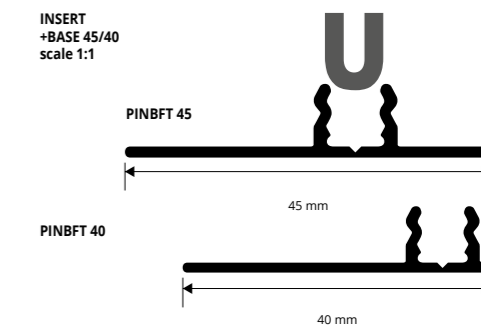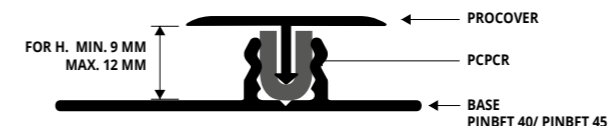


* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree


Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

PROPLATE

POLISHED STAINLESS 1.4016 STEEL
SELF-ADHESIVE OR PUNCHED

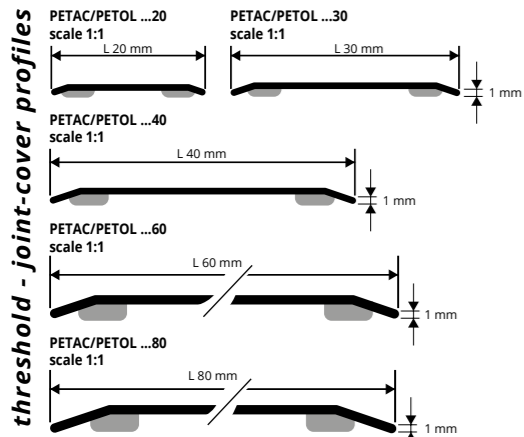


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing. 2. Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers. 4. When laying the punched version, align the profile and mark the position of the holes using the holes in the profile as reference. 5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors) 6. Align the profile and tighten the galvanised or brassed flathead screws.

PROPLATE

POLISHED BRASS
SELF-ADHESIVE OR PUNCHED

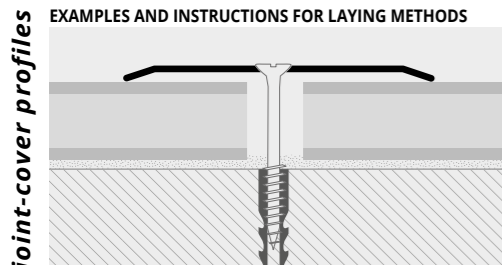

1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing. 2. Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers. 4. When laying the punched version, align the profile and mark the position of the holes using the holes in the profile as reference. 5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors) 6. Align the profile and tighten the galvanised or brassed flathead screws.

COLOURS



PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in stainless steel 1.4016 with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 - 30 - 40 - 40 - 80 mm with protective film.



POLISHED STAINLESS 1.4016 ST. thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20 - 30mm - 108 lm)

Article	Width - Thick.	€/lm	€/Pc
PETAC 20A (with adhesive)	20mm - 10/10	5,25	14,18
PETAC 30A (with adhesive)	30mm - 10/10	5,63	15,20
PETAC 40A (with adhesive)	40mm - 10/10	8,13	21,95
PETAC 60A (with adhesive)	60mm - 10/10	14,20	38,34
PETAC 80A (with adhesive)	80mm - 10/10	17,94	48,44

POLISHED STAINLESS 1.4016 STEEL thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	Width - Thick.	€/lm	€/Pc
PETAC 60 (without holes)	60mm - 10/10	12,47	33,67
PETAC 80 (without holes)	80mm - 10/10	16,19	43,71

PETAC 60A/80A/60/80, with 12/10 thickness available on demand.

PUNCHED POLISHED STAINLESS 1.4016 ST. with protective film
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 30mm - 108 lm)

Article	Width - Thick.	€/lm	€/Pc
PETAC 30F (punched)	30mm - 10/10	4,38	11,83
PETAC 40F (punched)	40mm - 10/10	6,87	18,55



POLISHED STAINLESS 1.4016 ST. thermo packed
bar length 0,93 lm - pack. 20 Pcs

Article	Width - Thick.	€/lm	€/Pc
PETAC 309AS (with adhesive)	30mm - 10/10	5,65	
PETAC 309FS (punched with screws and screw anchors)	30mm - 10/10	4,81	
PETAC 609AS (with adhesive)	60mm - 10/10	14,04	
PETAC 809AS (with adhesive)	80mm - 10/10	18,05	

COLOURS



PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in polished brass with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 - 30 - 40 - 40 - 80 mm with protective film.



POLISHED BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20/30mm - 108 lm)

Article	Width - Thick.	€/lm	€/Pc
PETOL 20A (with adhesive)	20mm - 10/10	6,96	18,79
PETOL 30A (with adhesive)	30mm - 10/10	7,15	19,31
PETOL 40A (with adhesive)	40mm - 10/10	9,03	24,38
PETOL 60A (with adhesive)	60mm - 10/10	15,81	42,69
PETOL 80A (with adhesive)	80mm - 10/10	19,94	53,84

POLISHED BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20 mm - 108 lm)

Article	Width - Thick.	€/lm	€/Pc
PETOL 20 (without holes)	20mm - 10/10	5,62	15,17
PETOL 60 (without holes)	60mm - 10/10	14,44	38,99
PETOL 80 (without holes)	80mm - 10/10	18,54	50,06

PETOL 60A/80A/60/80 with 13/10 thickness available on demand.

POLISHED BRASS with protective film
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 30 mm - 108 lm)

Article	Width - Thick.	€/lm	€/Pc
PETOL 30F (punched)	30mm - 10/10	5,82	15,71
PETOL 40F (punched)	40mm - 10/10	7,70	20,79

POLISHED BRASS thermo packed
bar length 0,83 lm - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PETOL 308AS (with adhesive)	30mm - 10/10	6,85
PETOL 408AS (with adhesive)	40mm - 10/10	8,42

POLISHED BRASS thermo packed
bar length 0,93 lm - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PETOL 309AS (with adhesive)	30mm - 10/10	7,62
PETOL 309FS (punched with screws and screw anchors)	30mm - 10/10	6,62
PETOL 409AS (with adhesive)	40mm - 10/10	9,79
PETOL 409FS (punched with screws and screw anchors)	40mm - 10/10	8,67
PETOL 609AS (with adhesive)	60mm - 10/10	14,42
PETOL 809AS (with adhesive)	80mm - 10/10	18,23

POLISHED BRASS thermo packed
bar length 1,03 lm - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PETOL 3010AS (with adhesive)	30mm - 10/10	8,67
PETOL 4010AS (with adhesive)	40mm - 10/10	10,53
PETOL 4010FS (punched with screws and screw anchors)	40mm - 10/10	9,63

POLISHED BRASS thermo packed
bar length 1,66 lm - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PETOL 3016AS (with adhesive)	30mm - 10/10	13,70
PETOL 4016AS (with adhesive)	40mm - 10/10	17,38

* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

PROPLATE 80 ALZ is a new aluminium joint cover, threshold cover. It is very resistant and suitable for covering the expanding joint of two different supporting structures, or to connect a floor with an adjoining one of the same or different kind. Particularly used in Industrial field, in the malls, sport facilities and gyms equipped with wood and/or resin floors.

PROPLATE 80 ALZ

KNURLED ANODIZED SILVER ALUMINIUM




Punched version available on demand.


ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PETAA 80Z - 40,5 lm)

Article	Width mm	€/lm	€/Pc
PETAA 80ZA (with adhesive)	80	15,34	41,42
PETAA 80Z (without adhesive)	80	14,28	38,56

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

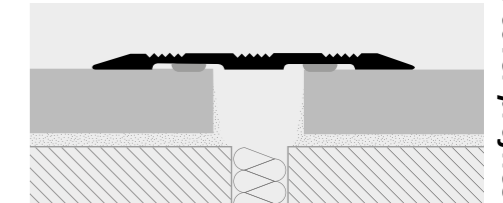

1. Choose "PROPLATE 80ALZ" model with or without sticker and cut it to the required length.
2. Degrease, wash and clean accurately the solid floor. 3. Remove the protective label from the sticker (sticker model). 4. Rest the square pressing evenly without hammering.
2. Perforate on one side and insert the nogs in the holes. 3. Fix and screw the square equipped with flared head screws suitable to the holes made.

PROCOVER 14PT is a small aluminium joint cover /threshold cover square. It is used to finish technically floors laid at the same level in ceramic tiles/ ceramics ceramics / wood. It covers eventual laying flaws and guarantees that the floors which are underneath expand enough. In Gold-Silk anodized Aluminium and Bronze with sticker.

PROCOVER 14PT

ANODIZED SILVER, GOLD AND BRONZE ALUMINIUM





ANODIZED ALUMINIUM WITH ADHESIVE thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width mm	€/lm	€/Pc
PCRAA 14PTA	14	4,02	10,85
PCRAO 14PTA	14	4,02	10,85
PCRAB 14PTA	14	4,02	10,85


COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

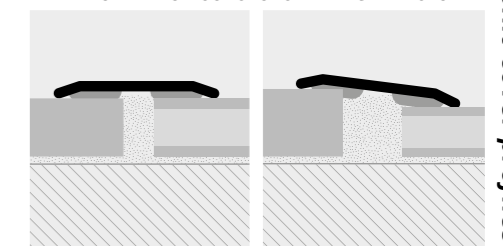

1. Choose the superficial finish of "PROCOVER 14PT" and cut it to the required length. 2. Degrease, wash and clean accurately the solid floor. 3. Remove the protective label from the sticker. 4. Lay the square pressing evenly without hammering.

* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

© 2019 All rights reserved by Progress Profiles. Printed in Italy

© 2019 All rights reserved by Progress Profiles. Printed in Italy



PROSOL 18-30-35-40 in steel are self-adhesive joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 18-30-35-40

STAINLESS STEEL 1.4016 WITH
SELF-ADHESIVE WITH PROTECTIVE FILM

threshold - joint-cover profiles




STAINLESS ST. 1.4016 with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40 mm - 54 lm)

Article	Width - Thick.	€/lm	€/Pc
PLSAC 18A	18 mm - 10/10	4,62	12,47
PLSAC 30A	30 mm - 10/10	5,08	13,72
PLSAC 35A	35 mm - 10/10	5,72	15,44
PLSAC 40A	40 mm - 12/10	8,00	21,60


STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 0,83 lm - pack. 20 Pcs 

Article	Width - Thick.	€/lm	€/Pc
PLSAC 308A	30 mm - 10/10	4,23	
PLSAC 358A	35 mm - 10/10	4,76	

On demand 0,73 or 0,63 lm bar length (quantity, prices and delivery time to be agreed).


STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs 

Article	Width - Thick.	€/lm	€/Pc
PLSAC 189A	18 mm - 10/10	5,03	

STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs 


Article	Width - Thick.	€/lm	€/Pc
PLSAC 309A	30 mm - 10/10	4,71	
PLSAC 359A	35 mm - 10/10	5,40	




STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 0,83 lm - pack. 20 Pcs 

Article	Width - Thick.	€/lm	€/Pc
PLSAC 308AS	30 mm - 10/10	5,29	
PLSAC 358AS	35 mm - 10/10	5,60	

On demand 0,73 or 0,63 lm bar length (quantity, prices and delivery time to be agreed).

STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs 

Article	Width - Thick.	€/lm	€/Pc
PLSAC 309AS	30 mm - 10/10	5,82	
PLSAC 359AS	35 mm - 10/10	6,24	
PLSAC 409AS	40 mm - 12/10	8,40	


STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 1,03 lm - pack. 20 Pcs 

Article	Width - Thick.	€/lm	€/Pc
PLSAC 3010AS	30 mm - 10/10	6,40	


STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 1,66 lm - pack. 20 Pcs 

Article	Width - Thick.	€/lm	€/Pc
PLSAC 3016AS	30 mm - 10/10	10,05	
PLSAC 3516AS	35 mm - 10/10	10,90	


PLSAC 18A/189A scale 1:1




PLSAC 30A/3010AS/309A/309AS/308A/308AS/3016AS scale 1:1




PLSAC 35A/359A/359AS/358A/358AS scale 1:1



PLSAC 40A/409AS scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

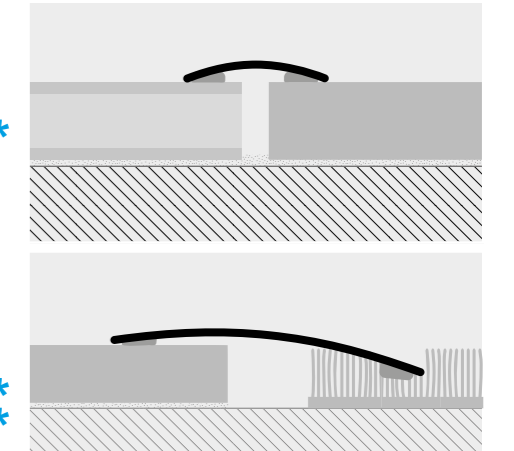

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

COLOURS



AC - Polished stainless steel 1.4016

On demand hand-brushed stainless steel (prices and delivery time to be agreed)




* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROSOL 30-35-40

PUNCHED STAINLESS STEEL 1.4016 WITH PROTECTIVE FILM

PROSOL 30-35-40 in steel are punched joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. PROSOL is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. PROSOL is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

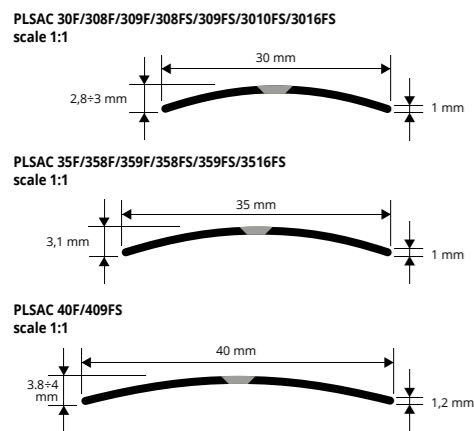

STAINLESS ST. 1.4016 punched - with protective film bar length 2,7 lm - pack. 20 Pcs - 54 lm (L 30 mm - 108 lm)

Article	Width - Thick.	€/lm	€/Pc
PLSAC 30F	30 mm - 10/10	3,86	10,42
PLSAC 35F	35 mm - 10/10	4,60	12,42
PLSAC 40F	40 mm - 12/10	6,74	18,20

STAINLESS ST. 1.4016 punched thermo packed bar length 0,83 lm - pack. 20 Pcs

Article	Width - Thick.	€/lm	€/Pc
PLSAC 308F	30 mm - 10/10	3,22	
PLSAC 358F	35 mm - 10/10	3,81	*

STAINLESS ST. 1.4016 punched thermo packed bar length 0,93 lm - pack. 20 Pcs

Article	Width - Thick.	€/lm	€/Pc
PLSAC 309F	30 mm - 10/10	3,59	
PLSAC 359F	35 mm - 10/10	4,28	*



COLOURS



AC - Polished stainless Steel 1.4016

On demand hand-brushed stainless steel (prices and delivery time to be agreed)

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

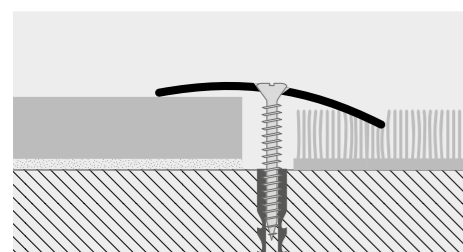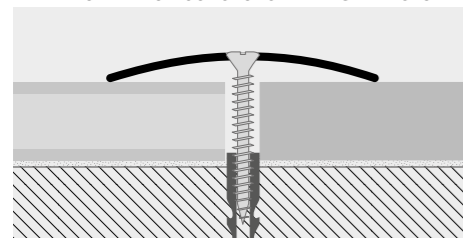

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.



STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length 0,83 lm - pack. 20 Pcs

Article	Width - Thick.	€/lm	€/Pc
PLSAC 308FS	30 mm - 10/10	4,34	
PLSAC 358FS	35 mm - 10/10	4,86	*

STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width - Thick.	€/lm	€/Pc
PLSAC 309FS	30 mm - 10/10	4,71	
PLSAC 359FS	35 mm - 10/10	5,35	*
PLSAC 409FS	40 mm - 12/10	7,44	*

STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length 1,03 lm - pack. 20 Pcs

Article	Width - Thick.	€/lm	€/Pc
PLSAC 3010FS	30 mm - 10/10	5,23	

STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length 1,66 lm - pack. 20 Pcs

Article	Width - Thick.	€/lm	€/Pc
PLSAC 3016FS	30 mm - 10/10	7,83	
PLSAC 3516FS	35 mm - 10/10	9,26	*

© 2010 All rights reserved by Progress Profiles. Printed in Italy

PROSOL 18-30-35-40 in brass are self-adhesive joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. PROSOL is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. PROSOL is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 18-30-35-40

POLISHED BRASS WITH SELF-ADHESIVE WITH PROTECTIVE FILM



POLISHED BRASS with adhesive thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40mm - 54 lm)

Article	Width - Thick.	€/lm	€/Pc
PLSOL 18A	18 mm - 10/10	6,24	16,85
PLSOL 30A	30 mm - 10/10	6,72	18,14
PLSOL 35A	35 mm - 10/10	8,25	22,28
PLSOL 40A	40 mm - 18/10	15,44	41,69

POLISHED BRASS with adhesive thermo packed bar length 0,83 lm - pack. 20 Pcs

Article	Width - Thick.	€/lm	€/Pc
PLSOL 308A	30 mm - 10/10	5,55	*

On demand 0,73 or 0,63 lm bar length (quantity, prices and delivery time to be agreed).

POLISHED BRASS with adhesive thermo packed bar length 0,90 lm - pack. 20 Pcs

Article	Width - Thick.	€/lm	€/Pc
PLSOL 189A	18 mm - 10/10	6,45	

POLISHED BRASS with adhesive thermo packed bar length 0,93 lm - pack. 20 Pcs

Article	Width - Thick.	€/lm	€/Pc
PLSOL 309A	30 mm - 10/10	6,24	
PLSOL 359A	35 mm - 10/10	7,67	*
PLSOL 409A	40 mm - 18/10	14,28	*

POLISHED BRASS with adhesive thermo packed bar length 1,03 lm - pack. 20 Pcs

Article	Width - Thick.	€/lm	€/Pc
PLSOL 3010A	30 mm - 10/10	6,93	

POLISHED BRASS with adhesive thermo packed bar length 1,66 lm - pack. 20 Pcs

Article	Width - Thick.	€/lm	€/Pc
PLSOL 3016A	30 mm - 10/10	11,15	*



POLISHED BRASS with adhesive thermo packed bar length 0,83 lm - pack. 20 Pcs

Article	Width - Thick.	€/lm	€/Pc
PLSOL 308AS	30 mm - 10/10	6,45	
PLSOL 358AS	35 mm - 10/10	7,83	

POLISHED BRASS with adhesive thermo packed bar length 0,93 lm - pack. 20 Pcs

Article	Width - Thick.	€/lm	€/Pc
PLSOL 309AS	30 mm - 10/10	7,03	
PLSOL 359AS	35 mm - 10/10	8,67	
PLSOL 409AS	40 mm - 18/10	15,52	*

POLISHED BRASS with adhesive thermo packed bar length 1,03 lm - pack. 20 Pcs

Article	Width - Thick.	€/lm	€/Pc
PLSOL 3010AS	30 mm - 10/10	7,88	
PLSOL 3510AS	35 mm - 10/10	9,57	


POLISHED BRASS with adhesive thermo packed bar length 1,66 lm - pack. 20 Pcs

Article	Width - Thick.	€/lm	€/Pc
PLSOL 3016AS	30 mm - 10/10	12,59	*
PLSOL 3516AS	35 mm - 10/10	15,38	*
PLSOL 4016AS	40 mm - 18/10	27,30	*



COLOURS



OL - Polished brass

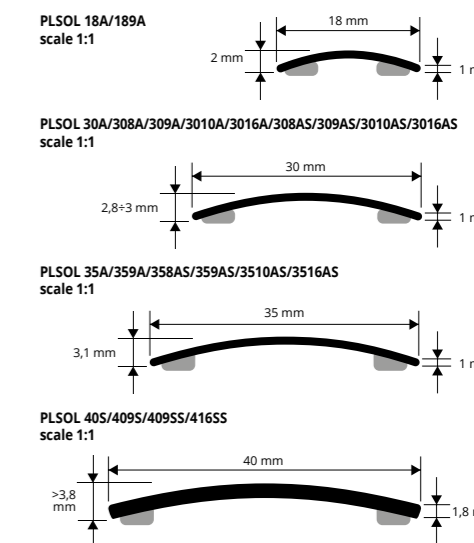

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

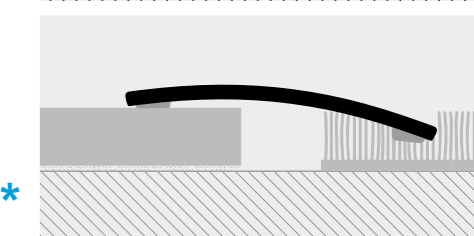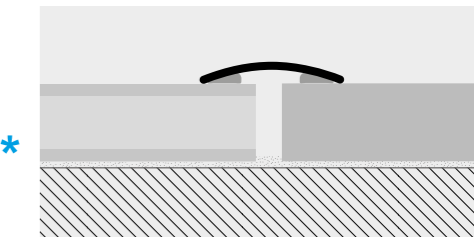


1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

threshold - joint-cover profiles

PROSOL 30-35-40

PUNCHED POLISHED BRASS WITH PROTECTIVE FILM

PROSOL 30-35-40 in brass are punched joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

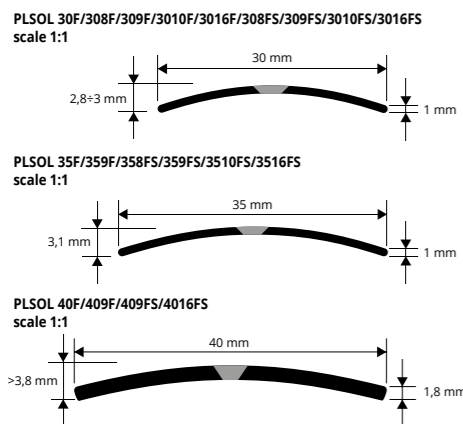

POLISHED BRASS punched with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40mm - 54 lm)

Article	Width - Thick.	€/lm	€/Pc
PLSOL 30F	30 mm - 10/10	5,40	14,58
PLSOL 35F	35 mm - 10/10	6,88	18,58 *
PLSOL 40F	40 mm - 18/10	14,07	37,99 *

POLISHED BRASS punched thermo packed
bar length 0,83 lm - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PLSOL 308F	30 mm - 10/10	4,49 *

POLISHED BRASS punched thermo packed
bar length 0,93 lm - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PLSOL 309F	30 mm - 10/10	5,03 *
PLSOL 359F	35 mm - 10/10	6,40 *
PLSOL 409F	40 mm - 18/10	12,50 *


POLISHED BRASS punched thermo packed
bar length 1,03 lm - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PLSOL 3010F	30 mm - 10/10	5,60 *

POLISHED BRASS punched thermo packed
bar length 1,66 lm - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PLSOL 3016F	30 mm - 10/10	8,99 *

COLOURS



POLISHED BRASS punched with screws and screw anchors thermo packed - bar length 0,83 lm - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PLSOL 308FS	30 mm - 10/10	5,65 *
PLSOL 358FS	35 mm - 10/10	6,98 *

On demand 0,73 or 0,63 lm bar length (quantity, prices and delivery time to be agreed).

POLISHED BRASS punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PLSOL 309FS	30 mm - 10/10	6,19 *
PLSOL 359FS	35 mm - 10/10	7,67 *
PLSOL 409FS	40 mm - 18/10	14,39 *

POLISHED BRASS punched with screws and screw anchors thermo packed - bar length 1,03 lm - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PLSOL 3010FS	30 mm - 10/10	5,60 *
PLSOL 3510FS	35 mm - 10/10	8,52 *

POLISHED BRASS punched with screws and screw anchors thermo packed - bar length 1,66 lm - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PLSOL 3016FS	30 mm - 10/10	10,79 *
PLSOL 3516FS	35 mm - 10/10	13,33 *
PLSOL 4016FS	40 mm - 18/10	25,29 *

© 2019 All rights reserved by Progress Profiles. Printed in Italy

PROSOL 30-35-40 are self-adhesive or punched joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.



ANODIZED ALUMINIUM with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width - Thick.	€/lm	€/Pc
PLS... 30A	30 mm - 1,3	4,44	11,99
PLSAA 35A	35 mm - 1,5	5,35	14,45
PLSAA 40A	40 mm - 2	6,24	16,85

PLS... 30A available in the colours: AA - AO - AT - CH - SB. The code of the selected colour must be added to the article code. E.g.: PLS... 30A (chosen finish anod. silver) PLSAA 30A.

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,83 lm - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PLSAA 308AS	30 mm - 10/10	4,49

On demand 0,73 or 0,63 lm bar length (quantity, prices and delivery time to be agreed).

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PLS... 309AS	30 mm - 10/10	5,03

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 1,03 lm - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PLSAA-AO 3010AS	30 mm - 10/10	5,50

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 1,66 lm - pack. 20 Pcs


Article	Width - Thick.	€/Pc
PLSAA 3016AS	30 mm - 10/10	8,72

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs


Article	Width - Thick.	€/Pc
PLSAA-AO 309A	30 mm - 10/10	4,13

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLS... 30A (chosen finish anod. silver) PLSAA 30A.

COLOURS




ON DEMAND MINIMUM 100 PCS by color and height




(price and delivery time to be agreed)

PROSOL 30-35-40

ANODIZED GOLD AND SILVER ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED

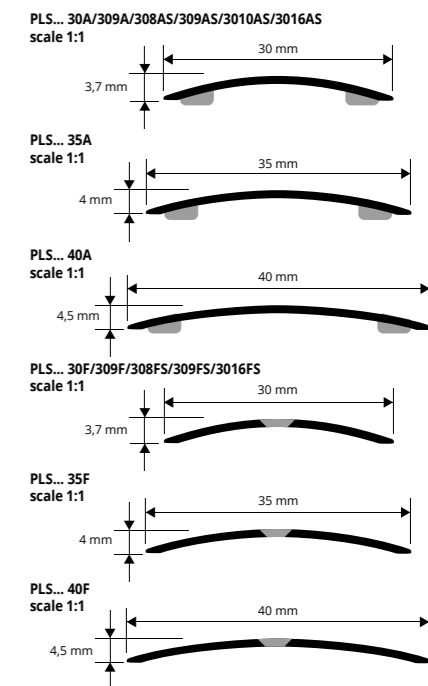

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

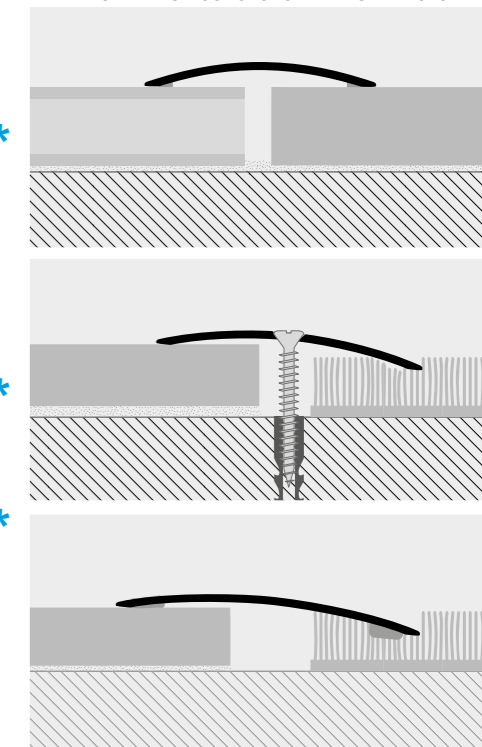

1. Choose the suitable profile and cut it to the necessary length.
 2. Degrease, wash and clean the solid surface thoroughly.
 3. Remove the protective paper from the adhesive.
 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.
- Punched version**
1. Mark the position of the holes using the existing holes in the profile as reference.
 2. Insert the screw anchors into the drilled holes.
 3. Fix the profile using flathead screws suitable for the relative slots in the profile.

threshold - joint-cover profiles

FLOORS



© 2019 All rights reserved by Progress Profiles, Printed in Italy

© 2019 All rights reserved by Progress Profiles, Printed in Italy

PROLEVALL 25-35-38 are joint - covers in anodized aluminium with gold, silver and bronze finish in various widths with a more or less knurled flat surface, available with self-adhesive backing or punched in various lengths. They are used to join floors of the same or differing material e.g. ceramic tiles, wood, marble, parquet or laminated, mainly to cover flaws created during laying or expansion joints. The chamfered edges ensure perfect adhesion to the floor, while the flat top allows perfect door closure. Recommended for dwellings and public environments with intense pedestrian traffic. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROLEVALL 25-35-38
ANODIZED GOLD AND SILVER ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED



ANODIZED ALUMINIUM with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width mm	€/lm	€/Pc
PLV... 25A	25	4,44	11,99
PLV... 35A	35	5,29	14,28
PLV... 38A	38	5,77	15,58

Available in the colours: AA - AO - AT - CH - SB.
The code of the selected colour must be added to the article code.
E.g.: PLV... 25A (chosen finish anod. silver) PLVAA 25A.



ANODIZED ALUMINIUM punched thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width mm	€/lm	€/Pc
PLV... 25F	25	3,28	8,86
PLV... 35F	35	4,13	11,15
PLV... 38F	40	4,60	12,42

PLV... 25F, PLV... 35F available in the colours: AA - AO - AT - CH - SB.
The code of the selected colour must be added to the article code.
E.g.: PLV... 25F (chosen finish anod. silver) PLVAA 25A.

OFF-CENTRE HOLES ON DEMAND

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs SELF PACK

Article	Width mm	€/Pc
PLVAA 259AS	25	5,03
PLV... 359AS	35	5,77
PLV... 389AS	38	6,29

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pcs SELF PACK

Article	Width mm	€/Pc
PLV... 259FS	25	4,18
PLV... 359FS	35	4,92
PLV... 389FS	38	5,18

PLV... 389FS available in the colours: AA - AO - AT - CH - SB.
The code of the selected colour must be added to the article code.
E.g.: PLV... 389FS (chosen finish anod. silver) PLVAA 25A.

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 1,03 lm - pack. 20 Pcs SELF PACK

Article	Width mm	€/Pc
PLV... 3510AS	35	6,34

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 1,03 lm - pack. 20 Pcs SELF PACK

Article	Width mm	€/Pc
PLV... 3510FS	35	5,40

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 1,66 lm - pack. 20 Pcs SELF PACK

Article	Width mm	€/Pc
PLV... 3516AS	35	10,16

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 1,66 lm - pack. 20 Pcs SELF PACK

Article	Width mm	€/Pc
PLV... 3516FS	35	8,40

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code. E.g.: PLV... 25A (chosen colour anodized gold alum.) PLVAO 25A.


COLOURS



ON DEMAND MINIMUM 100 PCS by color and height




(price and delivery time to be agreed)

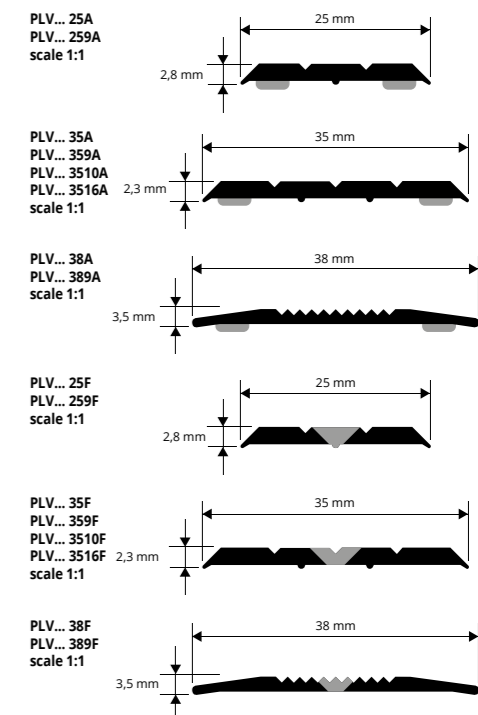

threshold - joint-cover profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

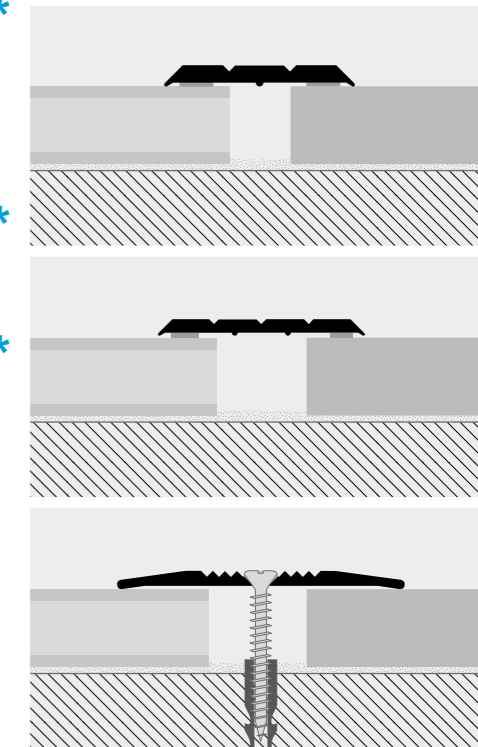

1. Choose the suitable profile and cut it to the necessary length.
- Adhesive version**
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.
- Punched version**
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.


* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROMOQUETTE

ANODIZED GOLD AND SILVER ALUMINIUM WITH OR WITHOUT SELF-ADHESIVE

PROMOQUETTE is an anodized aluminium rounded edging profile with tap-down edge, which is ideal for the clean-cut, elegant finishing of carpeted floors. The carpeting is inserted inside the curved/rounded section, which is then pressed down until the carpeting is secured, thereby also protecting the edge. **PROMOQUETTE** ensures a perfect finish, covering any flaws created during laying and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the floor.

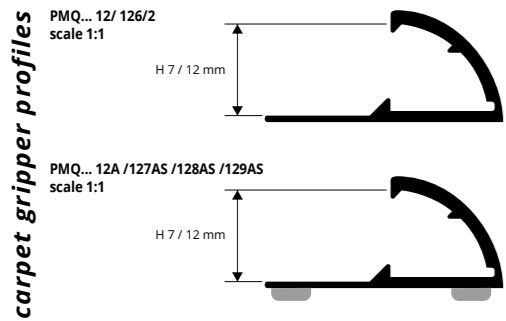

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm	€/lm	€/Pc
PMQ... 12A (with adhesive)	7/12	4,55	12,29
PMQ... 12 (without adhesive)	7/12	3,49	9,42

Available in the colours: AA - AO. (AB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PMQ... 12A (chosen colour Anodized gold alum.) PMQAO 12A.

ANODIZED GOLD, SILVER AND BRONZE ALUM. thermo packed - bar length 0,67 lm - pack. 2 Pcs

Article	H mm	€/lm	€/Pc
PMQ... 126/2 (without adhesive)	7/12	6,14	

COLOURS



ANODIZED SILVER ALUMINIUM thermo packed - bar length 0,73 lm - pack. 20 Pcs

Article	H mm	€/lm	€/Pc
PMQAA 127AS (with adhesive)	7/12	4,18	*


ANODIZED GOLD, SILVER AND BRONZE ALUM. thermo packed - bar length 0,83 lm - pack. 20 Pcs

Article	H mm	€/lm	€/Pc
PMQ... 128AS (with adhesive)	7/12	4,71	*

ANODIZED GOLD, SILVER AND BRONZE ALUM. thermo packed - bar length 0,93 lm - pack. 20 Pcs


Article	H mm	€/lm	€/Pc
PMQ... 129AS (with adhesive)	7/12	5,13	*

ON DEMAND MINIMUM 100 PCS by color and height



(price and delivery time to be agreed)

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS


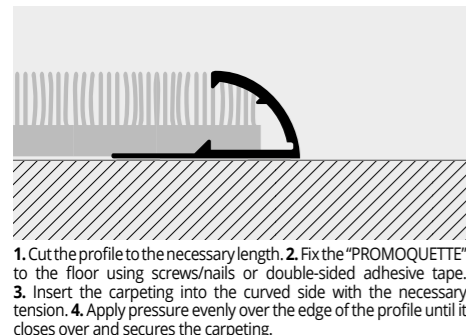


1. Cut the profile to the necessary length. 2. Fix the "PROMOQUETTE" to the floor using screws/nails or double-sided adhesive tape. 3. Insert the carpeting into the curved side with the necessary tension. 4. Apply pressure evenly over the edge of the profile until it closes over and secures the carpeting.

PROMOQUETTE FIX

ANODIZED GOLD AND SILVER ALUMINIUM PUNCHED OR NOTCHED

PROMOQUETTE FIX is a profile in anodized aluminium made as a terminal profile to edge carpeted floors held under tension or simply laid with double-sided adhesive tape. Two versions are available: notched or with holes/notches for laying under tension and then permanently fixed with screws/nails; or the punched version to edge without holding under tension. **PROMOQUETTE FIX** ensures an impeccable finish to the edge of carpeting that is not always perfectly cut. It speeds up laying time and the result is attractive.

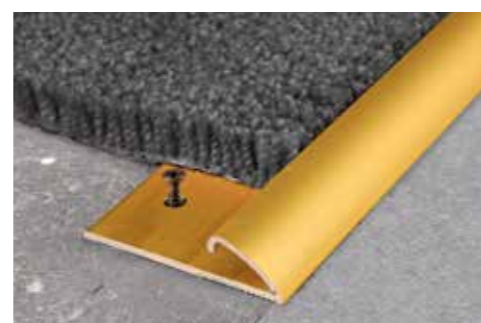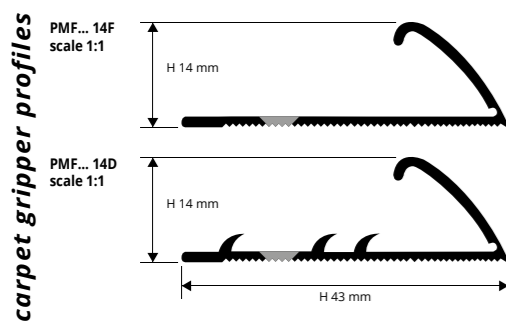

ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm	€/lm	€/Pc
PMF... 14F (punched)	14	3,91	10,56
PMFAA 14D (notched)	14	5,92	15,98

Available in the colours: AO - AA. (AB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PMF... 14F (chosen colour anodized gold alum.) PMFAO 14F.

INSTRUCTIONS FOR LAYING

1. Cut the profile to the necessary length. 2. Fix the "PROMOQUETTE FIX" to the floor using screws/nails. 3. Insert the carpeting into the curved side with the necessary tension. 4. Apply pressure evenly over the edge of the profile until it closes over and secures the carpeting.

EXEMPLES OF LAYING

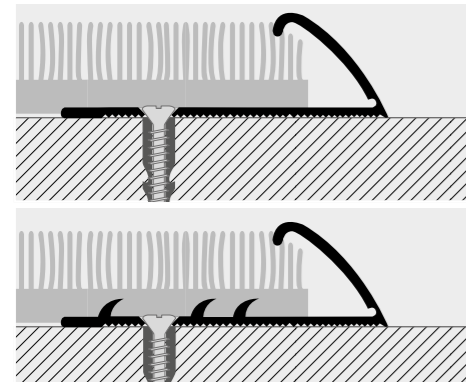

PROMOQUETTE GIN is a profile in anodized aluminium with tap-down edge for edging or joining floors in carpeting, PVC, linoleum, ceramic tiles/wood, etc. Two versions are available: punched for laying under tension and then permanently fixed with screws/nails or the adhesive version for laying with glue and which can be taken up if required. **PROMOQUETTE GIN** guarantees an impeccable finish and offers the dual function of both joining and of covering any flawed edges of the floors. It speeds up laying time and the result is attractive.

PROMOQUETTE GIN


ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED




ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PMG... 813F (punched)	8/13	5,92	15,98
PMG... 813A (with adhesive)	8/13	7,51	20,28


COLOURS




ON DEMAND MINIMUM 100 PCS by color and height



(price and delivery time to be agreed)

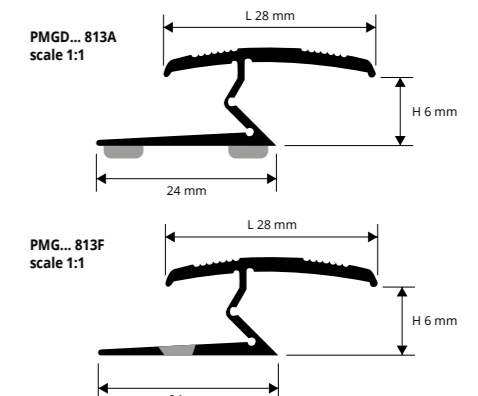

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

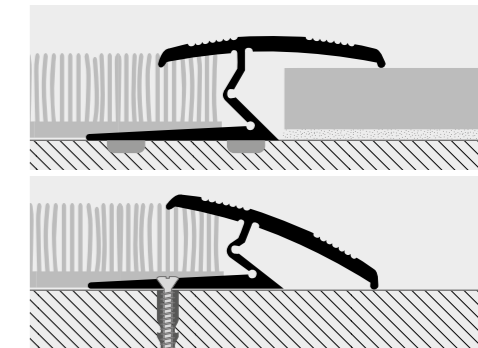

1. Cut the profile to the necessary length. 2. Fix the "PROMOQUETTE GIN" to the floor using screws/nails or two-sided adhesive tape. 3. Lay the required floor, inserting the carpeting, PVC, linoleum, ceramic tile or wood under the upper curved part. 4. Apply pressure evenly on the edges of the profile until they close and secure the flooring on both sides.


PROMOQUETTE CLIP is an aluminum profile, which allows to combine two carpet in practical and fast way. The profile is composed by a base and a TOP serrated, thanks to its particular section, allows to cover and fix the edges of the carpet with the connection of the top to the base. **PROMOQUETTE CLIP** in anodized aluminium is suitable for closed environment is required where a good resistance to mechanical and chemical stresses.

PROMOQUETTE CLIP


ANODIZED SILVER ALUMINIUM TOP AND NOTCHED BASE



COLOURS

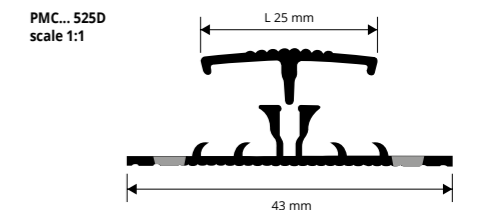

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

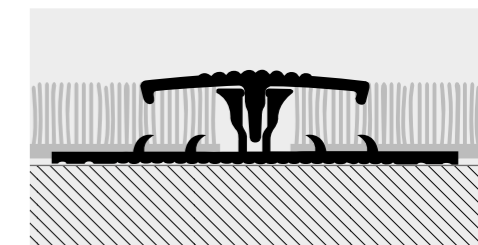

1. Cut the profile to the necessary length. 2. Fix the punched/notched base to the floor using screws/nails or two-sided adhesive tape. 3. Lay the carpeting by gluing or holding under tension. 4. With the help of a wooden tapping block and a hammer, apply pressure evenly over the whole of the top profile until it clicks into the base, thereby securing the carpeting on both sides.

* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

© 2010 All rights reserved by Progress Profiles. Printed in Italy

© 2010 All rights reserved by Progress Profiles. Printed in Italy

FLOORS

carpet gripper profiles