


GUGGENHEIM MUSEUM, NY, 1943
Frank Ll. Wright

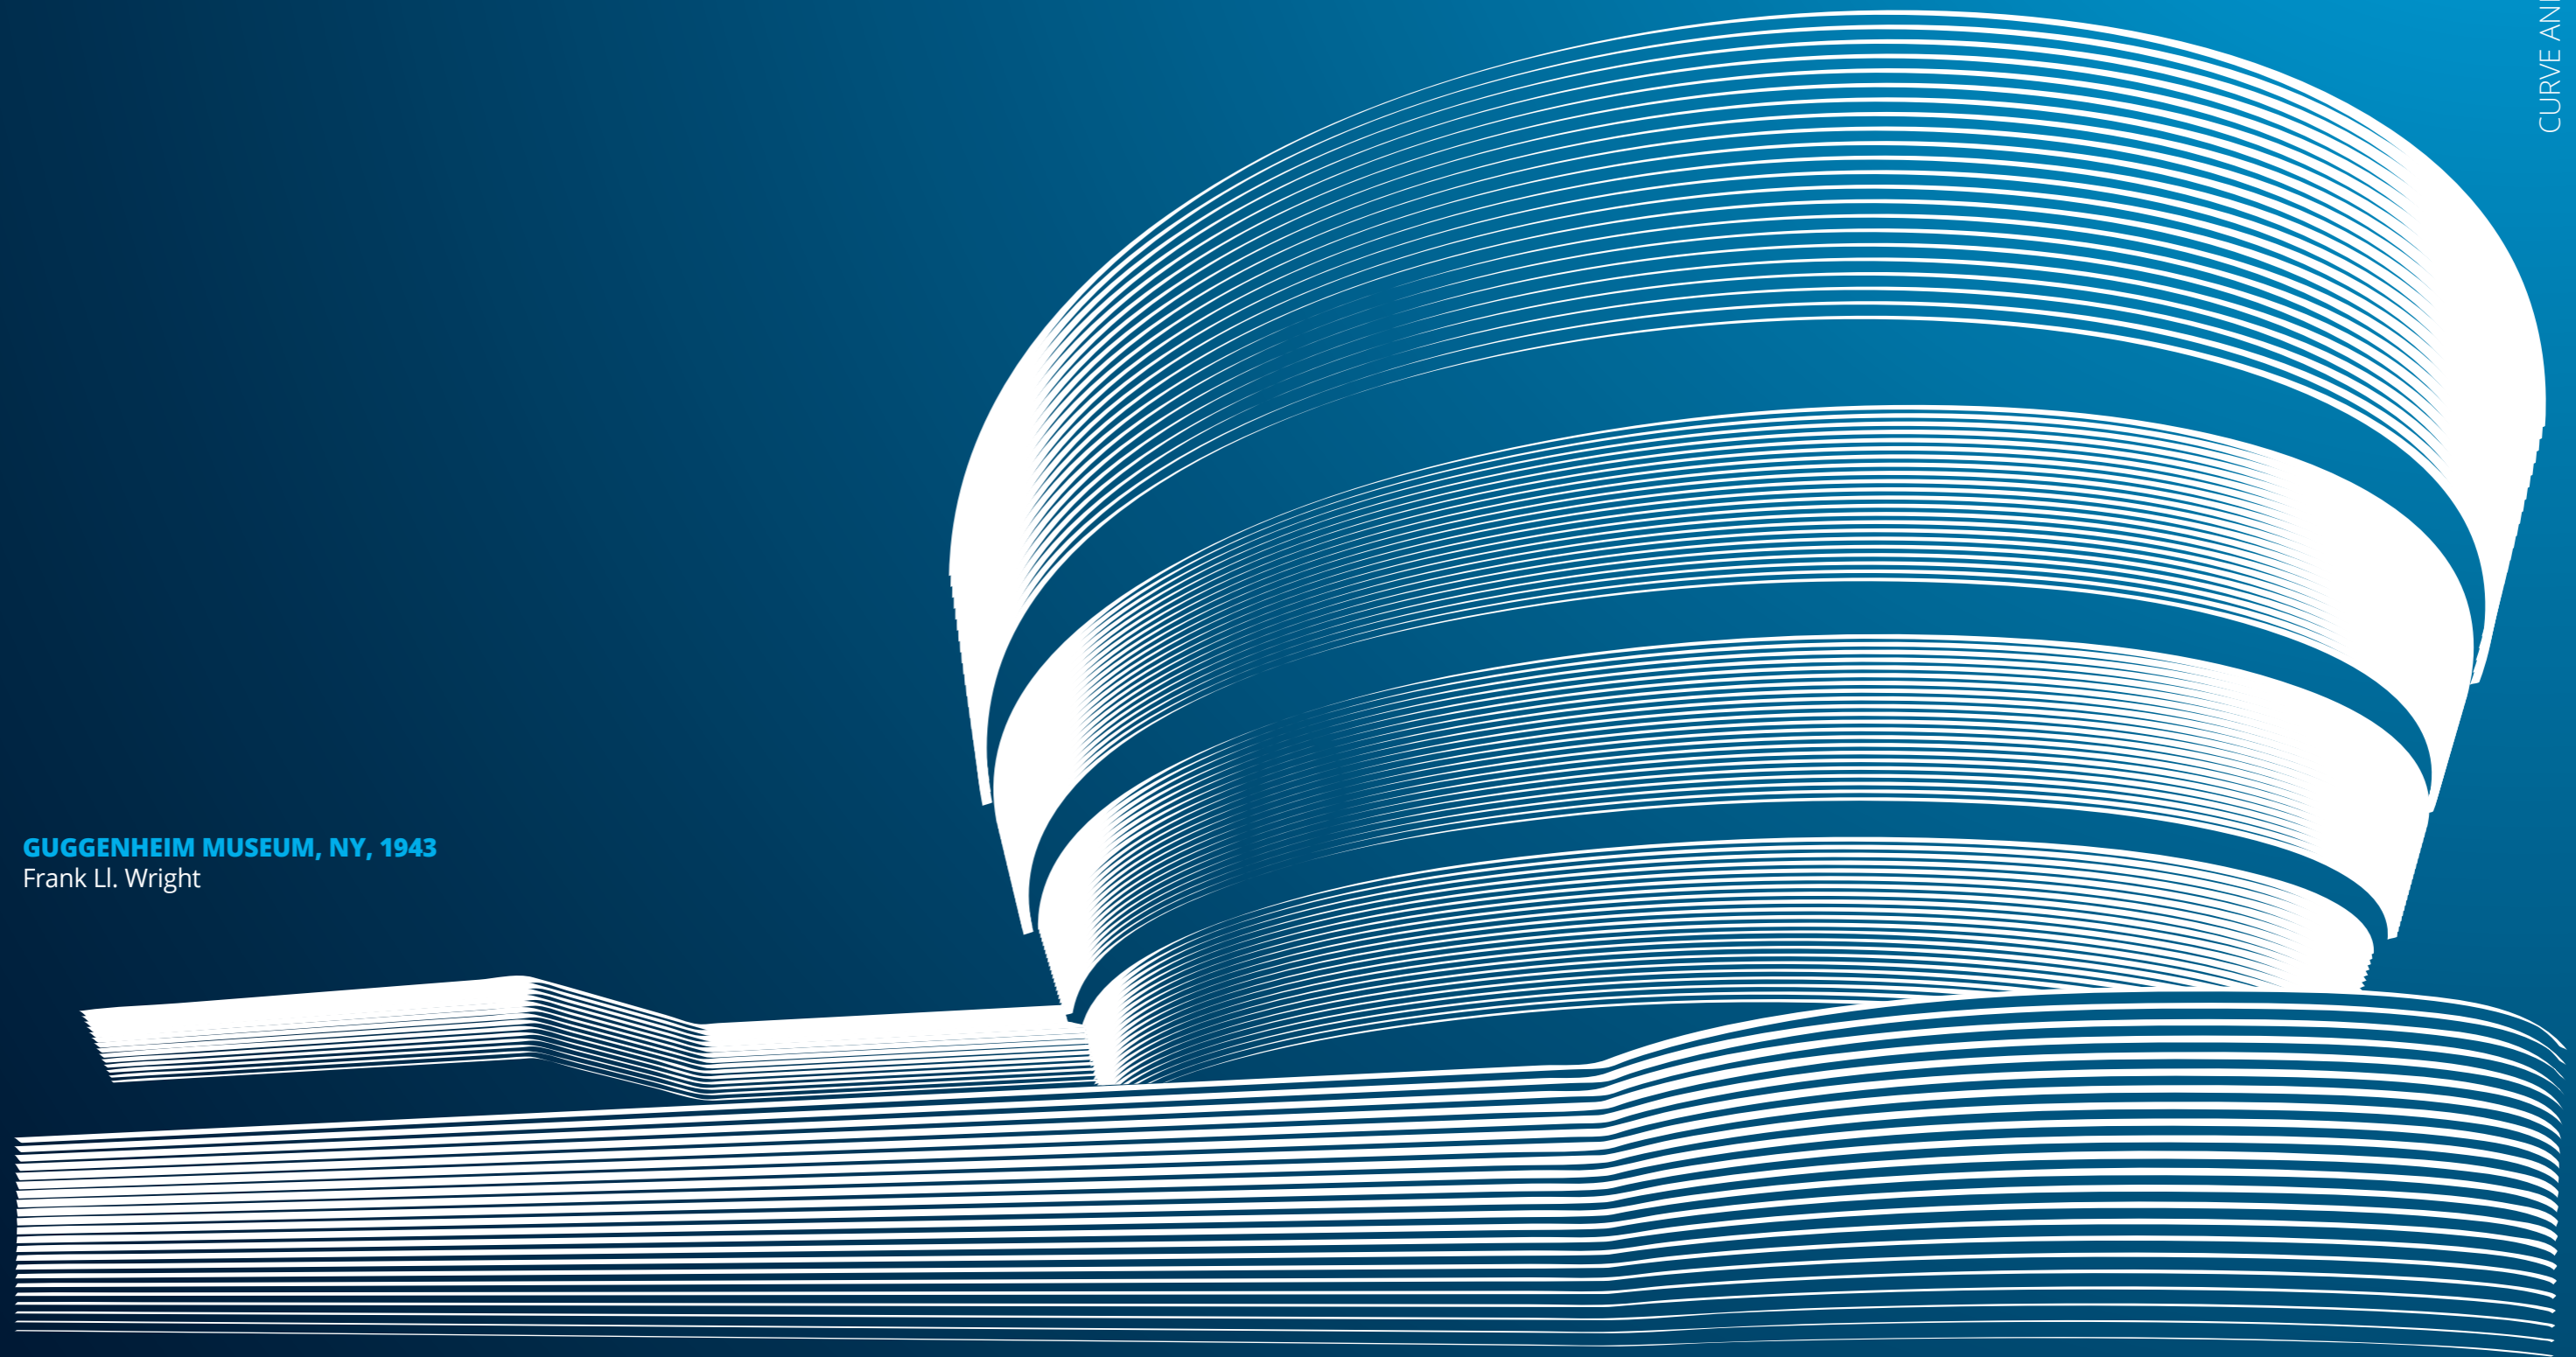



PRO...CURVE LINE

PRO CURVE LINE are a range of profiles that may be curved/shaped, with a special system of perforations allowing them to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. The profiles in the PRO CURVE LINE may be used as transition or edging profiles or to create joining and expansion joints on any type of ceramic, parquet, wood, laminate/melamine coated wood, marble, carpeted, Palladian, Venetian floor, etc. The profiles are made in AISI 304/1.4301-V2A stainless steel, aluminium and brass and may be easily shaped by using the PROCURVE MACHINE to bend the profiles mechanically.

PROTERMINAL CURVE

STAINLESS STEEL AISI 304/1.4301-V2A CURVABLE

PROTERMINAL CURVE are a range of edging and joining profiles that may be curved/shaped, with a special system of perforations allowing them to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm. The product is made in stainless steel AISI 304/1.4301-V2A in various heights (6, 8, 10, 12,5, 15 and 20 mm) in 2.7 m bars.

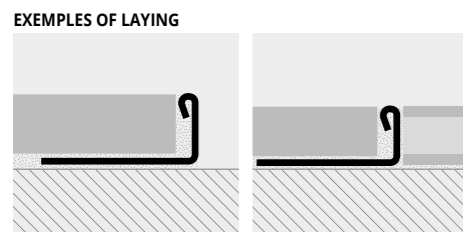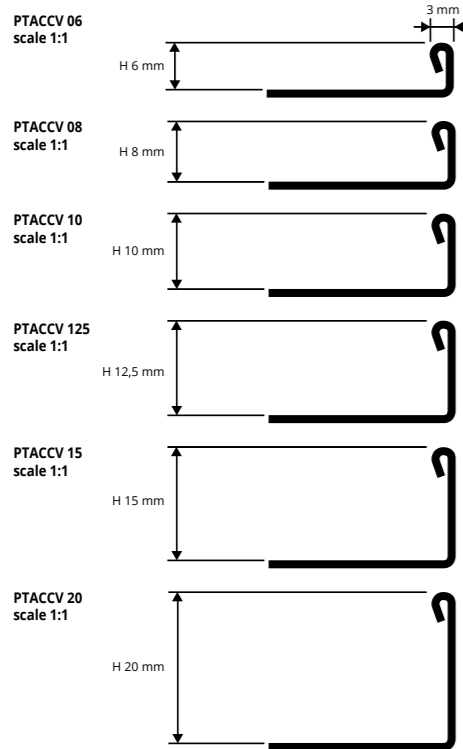

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

| Article | H mm | €/lm | €/Pc |
|------------|------|-------|-------|
| PTACCV 06 | 6 | 9,52 | 25,70 |
| PTACCV 08 | 8 | 9,79 | 26,43 |
| PTACCV 10 | 10 | 10,16 | 27,43 |
| PTACCV 125 | 12,5 | 10,53 | 28,43 |
| PTACCV 15 | 15 | 12,38 | 33,43 |
| PTACCV 20 | 20 | 13,11 | 35,40 |

For hand-brushed version + 30% gross price.

LAYING INSTRUCTIONS

1. Choose the "PROTERMINAL CURVE" with the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. If it is used as a joining profile, bring each floor to the edge of the profile.



COLOURS



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS


PROTERMINAL CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm of sandable profile. The product is made in natural brass in 2.7 m bars and heights of 6, 8, 10, 12.5, 15 and 20 mm.




NATURAL BRASS CURVABLE thermo packed 10pcs bar length 2,7 lm - pack. 40 Pcs - 108 lm (H:15; 20 mm - 54 lm)

| Article | H mm | €/lm | €/Pc |
|------------|------|-------|-------|
| PTONCV 06 | 6 | 7,93 | 21,41 |
| PTONCV 08 | 8 | 8,35 | 22,55 |
| PTONCV 10 | 10 | 8,78 | 23,71 |
| PTONCV 125 | 12,5 | 9,47 | 25,57 |
| PTONCV 15 | 15 | 10,16 | 27,43 |
| PTONCV 20 | 20 | 11,64 | 31,43 |

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

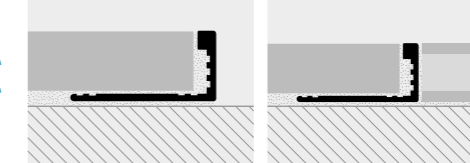

1. Choose the "PROTERMINAL CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidel-Smac, etc.). If it is used as a joining profile, bring each floor to the edge of the profile.





PROTERMINAL CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm of sandable profile. The product is made in natural aluminium in 2.7 m bars and heights of 6, 8, 10, 12.5, 15 and 20 mm.



NATURAL ALUMINIUM CURVABLE thermo packed 10 Pcs bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article | H mm | €/lm | €/Pc |
|------------|------|------|-------|
| PTANCV 06 | 6 | 3,28 | 8,86 |
| PTANCV 08 | 8 | 3,44 | 9,29 |
| PTANCV 10 | 10 | 3,54 | 9,56 |
| PTANCV 125 | 12,5 | 3,65 | 9,86 |
| PTANCV 15 | 15 | 3,91 | 10,56 |
| PTANCV 20 | 20 | 4,44 | 11,99 |

COLOURS

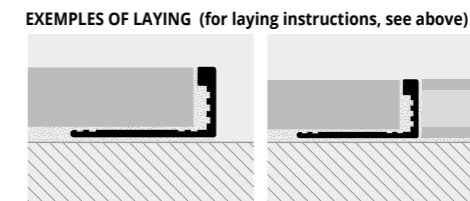


COLOURS




PROTERMINAL CURVE

NATURAL BRASS CURVABLE

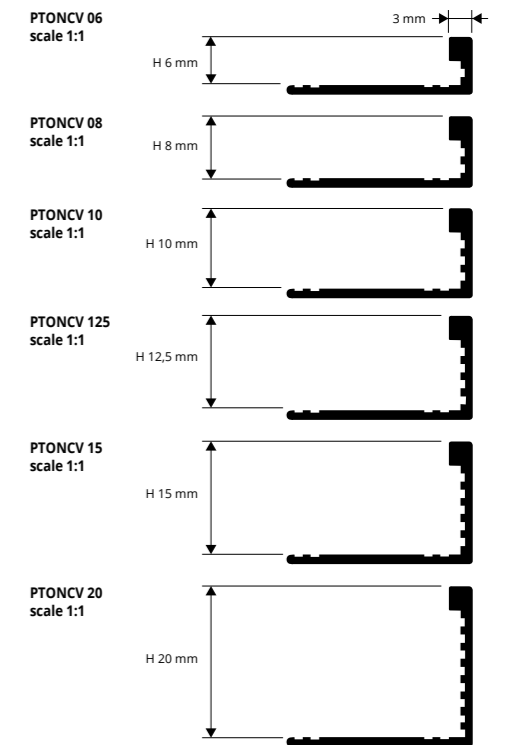

PROTERMINAL CURVE

NATURAL ALUMINIUM CURVABLE

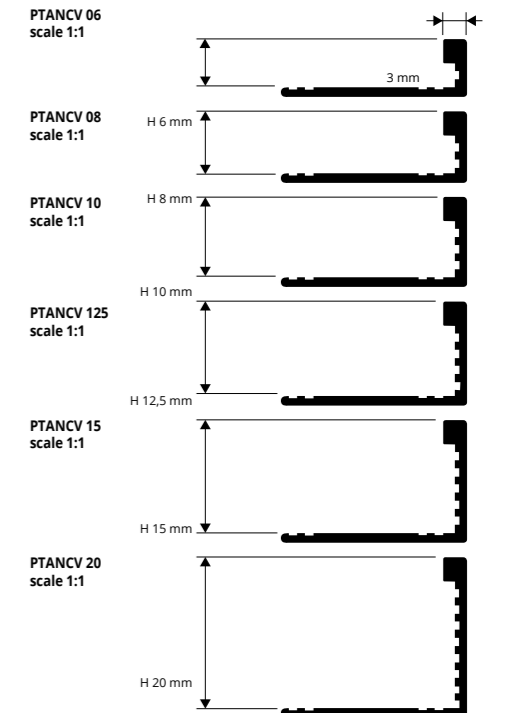





© 2019 All rights reserved by Progress Profiles. Printed in Italy

© 2019 All rights reserved by Progress Profiles. Printed in Italy

PROLEGANT CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 6 mm of sandable profile. The product is made in natural brass in 2.7 m bars and heights of 8-10-12.5 and 14 mm.

PROLEGANT CURVE



NATURAL BRASS CURVABLE

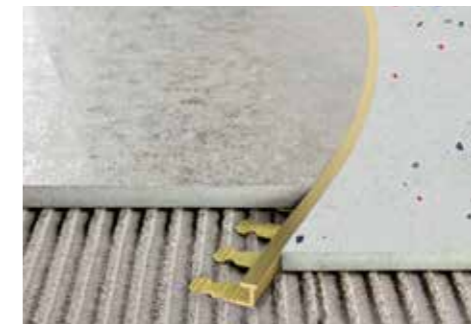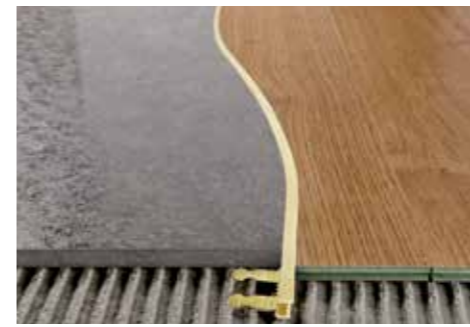


NATURAL BRASS CURVABLE thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

| Article | H mm | €/lm | €/Pc |
|-------------|------|-------|---------|
| PELONCV 08 | 8 | 13,23 | 35,72 * |
| PELONCV 10 | 10 | 13,70 | 36,99 |
| PELONCV 125 | 12,5 | 14,17 | 38,26 |
| PELONCV 14 | 14 | 15,34 | 41,42 * |

COLOURS

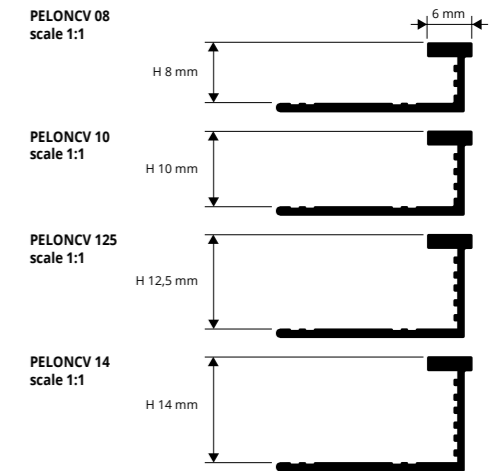

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

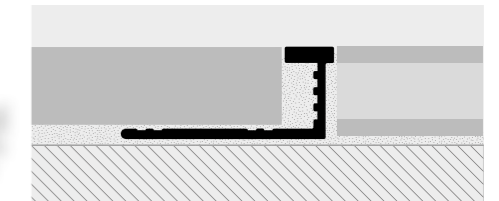

1. Choose the "PROLEGANT CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidol-Smac, etc.).

PROLEGANT CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 6 mm of sandable profile. The product is made in silver anodized aluminium in 2.7 m bars and heights of 8-10-12.5 mm.

PROLEGANT CURVE


ANODIZED SILVER ALUMINIUM CURVABLE




ANODIZED SILVER ALUMINIUM CURVABLE thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

| Article | H mm | €/lm | €/Pc |
|-------------|------|------|-------|
| PELAACV 08 | 8 | 6,56 | 17,71 |
| PELAACV 10 | 10 | 6,77 | 18,28 |
| PELAACV 125 | 12,5 | 7,09 | 19,14 |

COLOURS

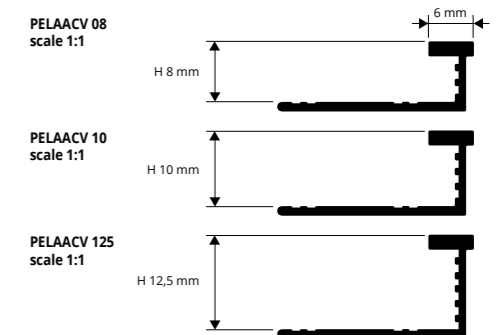

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

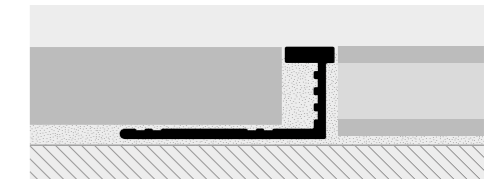

1. Choose the "PROLEGANT CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidol-Smac, etc.).


* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.


PROFINAL CURVE

NATURAL BRASS CURVABLE


PROFINAL CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 8 mm of sandable profile. The product is made in natural brass in 2.7 m bars and heights of 8, 10 and 12.5 mm.

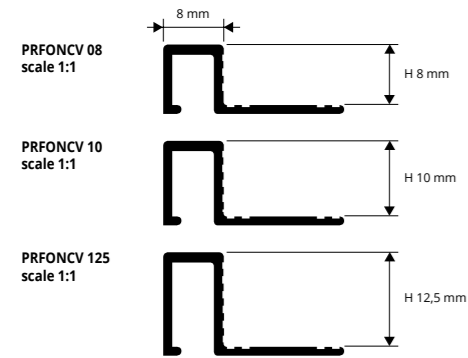

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

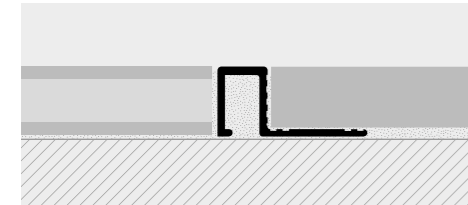



1. Choose the "PROFINAL CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sisol-Smac, etc.). If it is used as a joining profile, bring each floor to the edge of the profile.

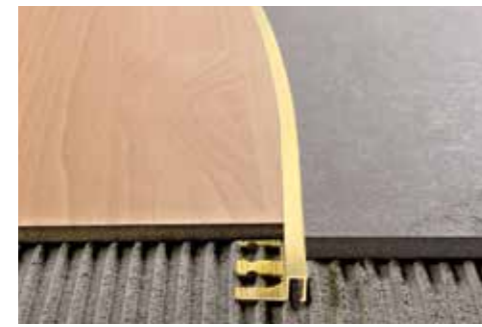

NATURAL BRASS CURVABLE thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

| Article | H mm | €/lm | €/Pc |
|-------------|------|-------|---------|
| PRFONCV 08 | 8 | 14,28 | 38,56 * |
| PRFONCV 10 | 10 | 15,87 | 42,85 |
| PRFONCV 125 | 12,5 | 17,35 | 46,85 |


COLOURS




PROFINAL CURVE

ANODIZED SILVER ALUMINIUM CURVABLE


PROFINAL CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 8 mm of sandable profile. The product is made in silver anodized aluminium in 2.7 m bars and heights of 8, 10 and 12.5 mm.

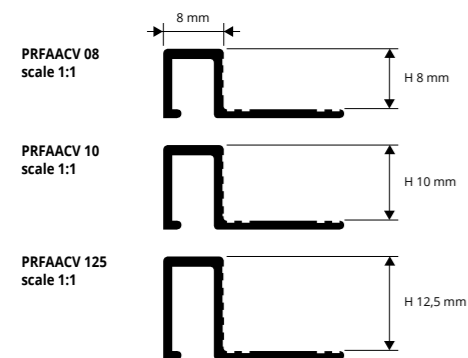

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

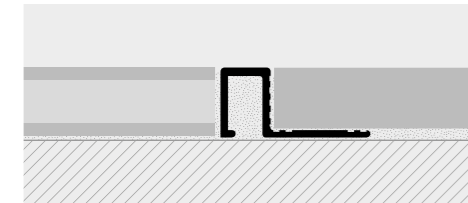


1. Choose the "PROFINAL CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sisol-Smac, etc.). If it is used as a joining profile, bring each floor to the edge of the profile.

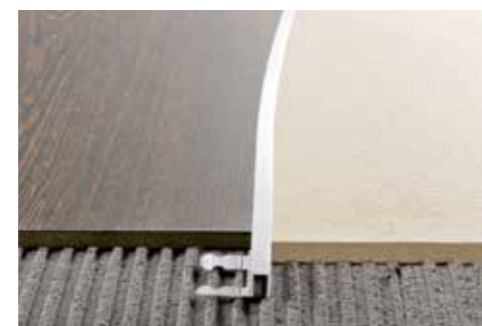

ANODIZED SILVER ALUMINIUM CURVABLE thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

| Article | H mm | €/lm | €/Pc |
|-------------|------|------|---------|
| PRFAACV 08 | 8 | 7,09 | 19,14 * |
| PRFAACV 10 | 10 | 7,46 | 20,14 |
| PRFAACV 125 | 12,5 | 7,73 | 20,87 |

COLOURS



PROJOLLY CURVE is a range of terminal transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. It is made in natural brass, height H 8 - H 10mm, length 2.7 lm.

PROJOLLY CURVE



NATURAL BRASS CURVABLE



NATURAL BRASS CURVABLE thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

| Article | H mm | €/lm | €/Pc |
|-----------|------|-------|---------|
| PJONCV 08 | 8 | 15,02 | 40,55 * |
| PJONCV 10 | 10 | 15,98 | 43,15 |

COLOURS

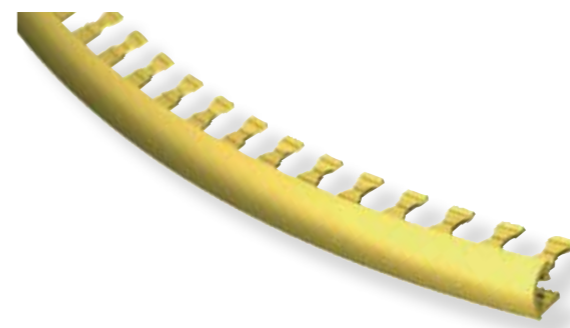


PJONCV 08 scale 1:1



PJONCV 10 scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

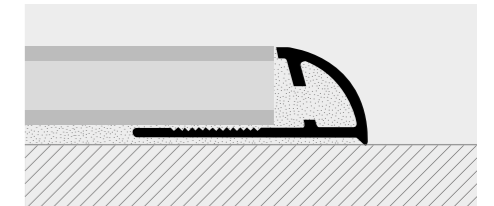

1. Choose the "PROJOLLY CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive.

PROJOLLY CURVE is a range of terminal transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. It is made in anodized aluminium, height H 8 - H 10mm, length 2.7 lm.

PROJOLLY CURVE


ANODIZED SILVER ALUMINIUM CURVABLE



ANODIZED SILVER ALUMINIUM CURVABLE thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

| Article | H mm | €/lm | €/Pc |
|-----------|------|------|---------|
| PJAACV 08 | 8 | 5,72 | 15,44 * |
| PJAACV 10 | 10 | 6,09 | 16,44 |

COLOURS

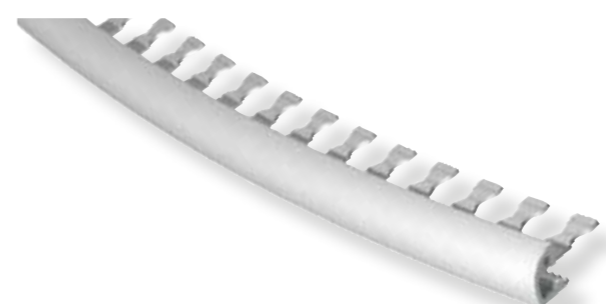


PJAACV 08 scale 1:1



PJAACV 10 scale 1:1




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

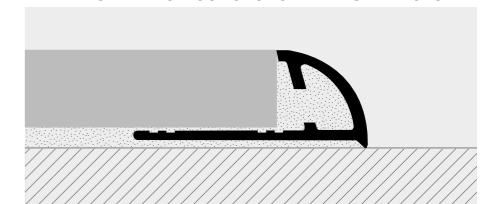

1. Choose the "PROJOLLY CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive.

TERMINAL CURVE

ANODIZED SILVER ALUMINIUM AND 10 WOOD FINISHES - CURVABLE

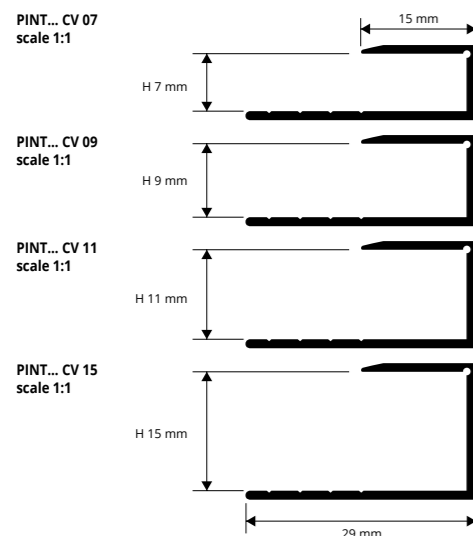

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "TERMINAL CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive.

TERMINAL CURVE is a range of edging and joining profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. Recommended for edging and/or joining floating floors in wood & melamine-laminated wood. It is made in anodized aluminium and in 10 wood effect finishes; it comes in various heights, length 2.7m.



ANODIZED SILVER ALUMINIUM CURVABLE thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

| Article | H mm | €/lm | €/Pc |
|-------------|------|------|---------|
| PINTAACV 07 | 7 | 6,19 | 16,71 |
| PINTAACV 09 | 9 | 6,29 | 16,98 |
| PINTAACV 11 | 11 | 6,40 | 17,28 |
| PINTAACV 15 | 15 | 6,88 | 18,58 * |



ALUMINIUM 10 WOOD FINISHES thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


| Article | H mm | €/lm | €/Pc |
|---------------|------|-------|---------|
| PINT... CV 09 | 9 | 10,68 | 28,84 * |
| PINT... CV 15 | 15 | 11,96 | 32,29 * |

Available in the wood finishes: 04W-05W-07W-08W-09W-10W-11W-28W-29W-30W.
The code of the selected colour must be added to the article code.
E.g.: PINT... CV 09 (chosen finish Dark beech) PINT04W CV 09.

COLOURS




ON DEMAND MINIMUM QUANTITY 100 PCS




PROCOVER PROCOVER WOOD

ANODIZED SILVER ALUMINIUM AND 10 WOOD FINISHES - CURVABLE



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

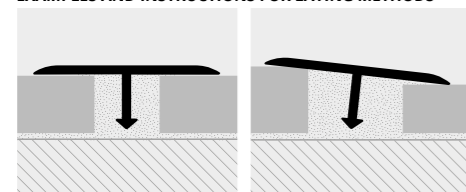

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

PROCOVER is a joint-cover profile in anodized aluminium and aluminium covered with a very strong film available in 10 wood finishes. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.



ANODIZED SILVER ALUMINIUM CURVABLE thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article | H mm | €/lm | €/Pc |
|-----------|--------|------|-------|
| PCRAA 149 | 14 x 9 | 3,22 | 8,69 |
| PCRDB 149 | 14 x 9 | 4,11 | 11,10 |



ALUMINIUM 10 WOOD FINISHES thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article | L x H mm | €/lm | €/Pc |
|-------------|----------|------|-------|
| PCRA... 149 | 14 x 9 | 5,21 | 14,07 |

Available in the wood finishes: 04W-05W-07W-08W-09W-10W-11W-28W-29W-30W.
The code of the selected colour must be added to the article code.
E.g.: PCRA...149 (chosen finish Dark beech) PCRA 04W 149.

COLOURS



* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

PROSLIDER CURVE is a range of transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. Recommended for joining floating floors in wood, melamine laminated wood and ceramics. It is made in natural brass in various heights, length 2.7 lm.

PROSLIDER CURVE


NATURAL BRASS CURVABLE



NATURAL BRASS CURVABLE thermo packed
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm


| Article | H mm | €/lm | €/Pc |
|-----------|------|-------|---------|
| PDONCV 08 | 8 | 15,34 | 41,42 * |
| PDONCV 10 | 10 | 17,46 | 47,14 * |

COLOURS




LAYING INSTRUCTIONS

1. Choose the "PROSLIDER CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors, if used for floating floors in melamine/laminated wood, or simply insert the punched base under the floor laid with the same adhesive.

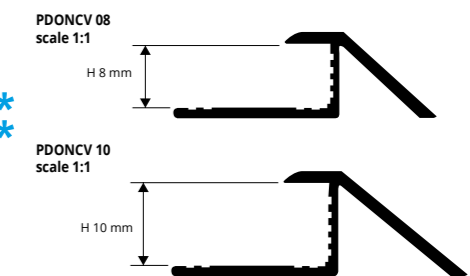

EXEMPLES OF LAYING

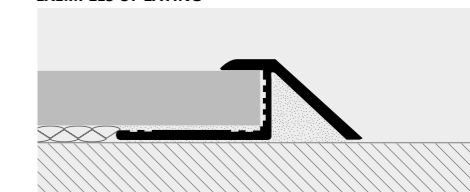

PROSLIDER CURVE is a range of transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. Recommended for joining floating floors in wood, melamine laminated wood and ceramics. It is made in anodized aluminium in various heights, length 2.7 lm.

PROSLIDER CURVE


ANODIZED SILVER ALUMINIUM CURVABLE



ANODIZED SILVER ALUMINIUM CURVABLE thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

| Article | H mm | €/lm | €/Pc |
|-----------|------|------|-------|
| PDAACV 08 | 8 | 7,78 | 21,01 |
| PDAACV 10 | 10 | 8,99 | 24,27 |

COLOURS

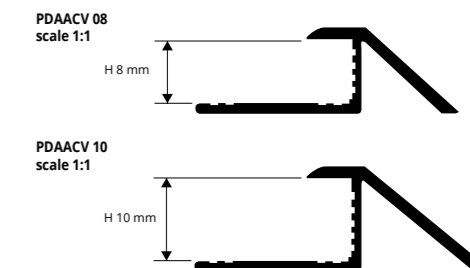

PROCURVE MACHINE is a manual profile bending machine for profiles of the CURVE SERIES.

PROCURVE MACHINE

| Article | €/Pc |
|---------|--------|
| PCM 08 | 872,70 |



| Page | Items / series available for | Minimum inside radius | Minimum outside radius |
|------|------------------------------|-----------------------|------------------------|
| 100 | PTACCV | 30 cm | 30 cm |
| 101 | PTONCV | 30 cm | 30 cm |
| 101 | PTANCV | 30 cm | 30 cm |
| 103 | PELONCV | 150 cm | 300 cm |
| 103 | PELAACV | 200 cm | 300 cm |
| 104 | PRFONCV | 200 cm | |
| 104 | PRFAACV | 200 cm | |
| 105 | PJONCV | 200 cm | 300 cm |
| 105 | PJAAACV | 200 cm | 300 cm |
| 106 | PINTAACV | 300 cm | |
| 106 | PCRAA 149 | 80 cm | 80 cm |
| 106 | PCRA... 149 | 100 cm | 100 cm |
| 107 | PDONCV | 300 cm | |
| 107 | PDAACV | 300 cm | |

* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.