



STAR NOSINGS PROFILES

**DOMINION OFFICE BUILDING, MOSCOW, 2015**  
Zaha Hadid

# PROSTAIR ACC

SATINED STAINLESS STEEL AISI 304/1.4301-V2A

**PROSTAIR ACC** is steps protecting technical profile, designed and conceived to make the step scales made of ceramic, porcelain stoneware and others nonskid and non-slip ones ; it's to be applied before the step laying process. Manufactured in aisi 304/1.4301-V2A glazed stainless steel, with the superior side level crimped in order to increase its adhesion. It replaces special ceramic elements in refined, resistant and economic way. It is compulsory in public places for the accident prevention. It is recommended for elegant, refined industrial, commercial and private environments: available in H 4,5-6-8-10-12,5-15 mm versions. Combining with the entire series of steel profiles recommended.

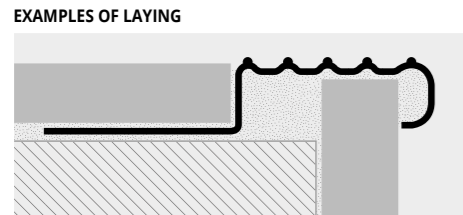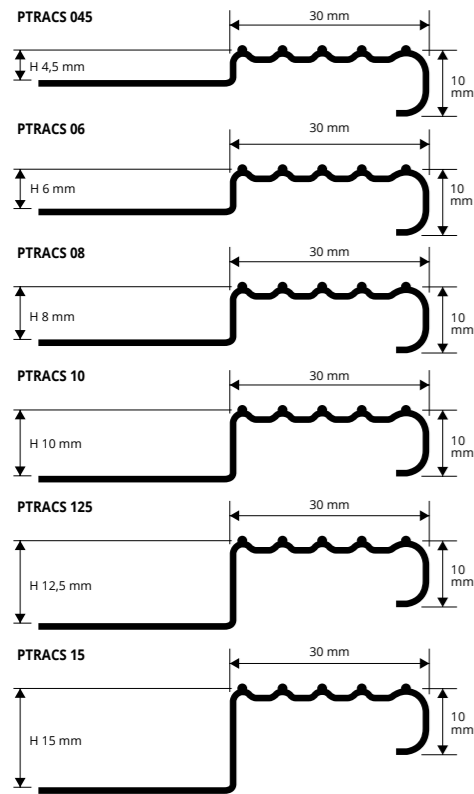

SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A with protective film  
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PTRACS 045	4,5	13,75	37,13
PTRACS 06	6	14,16	38,23
PTRACS 08	8	14,49	39,12
PTRACS 10	10	14,91	40,26
PTRACS 125	12,5	15,44	41,69
PTRACS 15	15	16,18	43,69

Available in SATINED STAINLESS STEEL AISI 316L/1.440-V4A (minimum quantity order 100 pcs - price and delivery time to be agreed).

### OUT OF STANDARD SIZE PRICES:

For Length 1 lm + 10% (minimum order of 300 lm)  
For Length 1,5 lm + 5% (minimum order of 300 lm)

### LAYING INSTRUCTIONS

1. Choose the PROSTAR ACC of the desired height and material on the basis of the tile (steps) thickness. 2. Fix the first rising part laying it down at its appropriate and definitive level. 3. Fill completely the empty spaces under the profile with the tile adhesive. 4. Spread out the adhesive on the tread, lay down the profile with its cut base immersed completely in adhesive and align it so that the profile covers the riser tile edge. 5. Lay down the tread tiles and align them with the superior grazing part of the profile by drawing its back close and filling the inner space with the adhesive.


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS



END CAP IN VARNISHED PLASTIC SATINED STAINLESS STEEL EFFECT  
pack. 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack.
TPTRACS/1	4,5 + 15	2,58

Articles not for sale singly

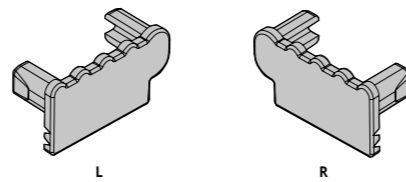



### COLOURS



# PROSTYLE 2610

SATINED STAINLESS STEEL AISI 304/1.4301-V2A  
SELF ADHESIVE OR PUNCHED

**PROSTYLE 2610** is steps protecting technical profile, designed and conceived to keep the step scales made of ceramic, porcelain stoneware, wood, marble and others nonskid and non-slip ones ; it's to be applied after the step laying process or in the already present rooms. Manufactured in aisi 304/1.4301-V2A glazed stainless steel, with the superior side level crimped in order to increase its adhesion. It replaces special ceramic elements in refined, resistant and economic way. It's ideal for the edges protection and screening as well as of the corner between the rising and the tread which is the point of the greatest strain. It is compulsory in public places for the accident prevention. It is recommended for elegant, refined industrial, commercial and private environments. Available in drilled version or in with adhesive one.

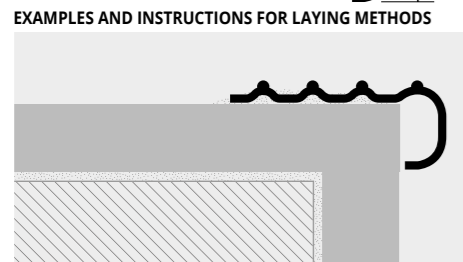

**Adhesive version**  
1. Choose the suitable profile and cut it to the necessary length.  
2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.  
**Punched version**  
1. Choose the suitable profile and cut it to the necessary length.  
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.



SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10mm

Article	H mm	€/lm	€/Pc
PSYACS 2610F (punched)	10	11,59	31,29 *
PSYACS 2610A (with adhesive)	10	13,70	36,99 *

Available in SATINED STAINLESS STEEL AISI 316L/1.440-V4A (minimum quantity order 100 pcs - price and delivery time to be agreed).

### OUT OF STANDARD SIZE PRICES:

For Length 1 lm + 10% (minimum order of 300 lm)  
For Length 1,5 lm + 5% (minimum order of 300 lm)

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS



### COLOURS





\* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks. Price to agree

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2010 All rights reserved by Progress Profiles, Printed in Italy

© 2010 All rights reserved by Progress Profiles, Printed in Italy

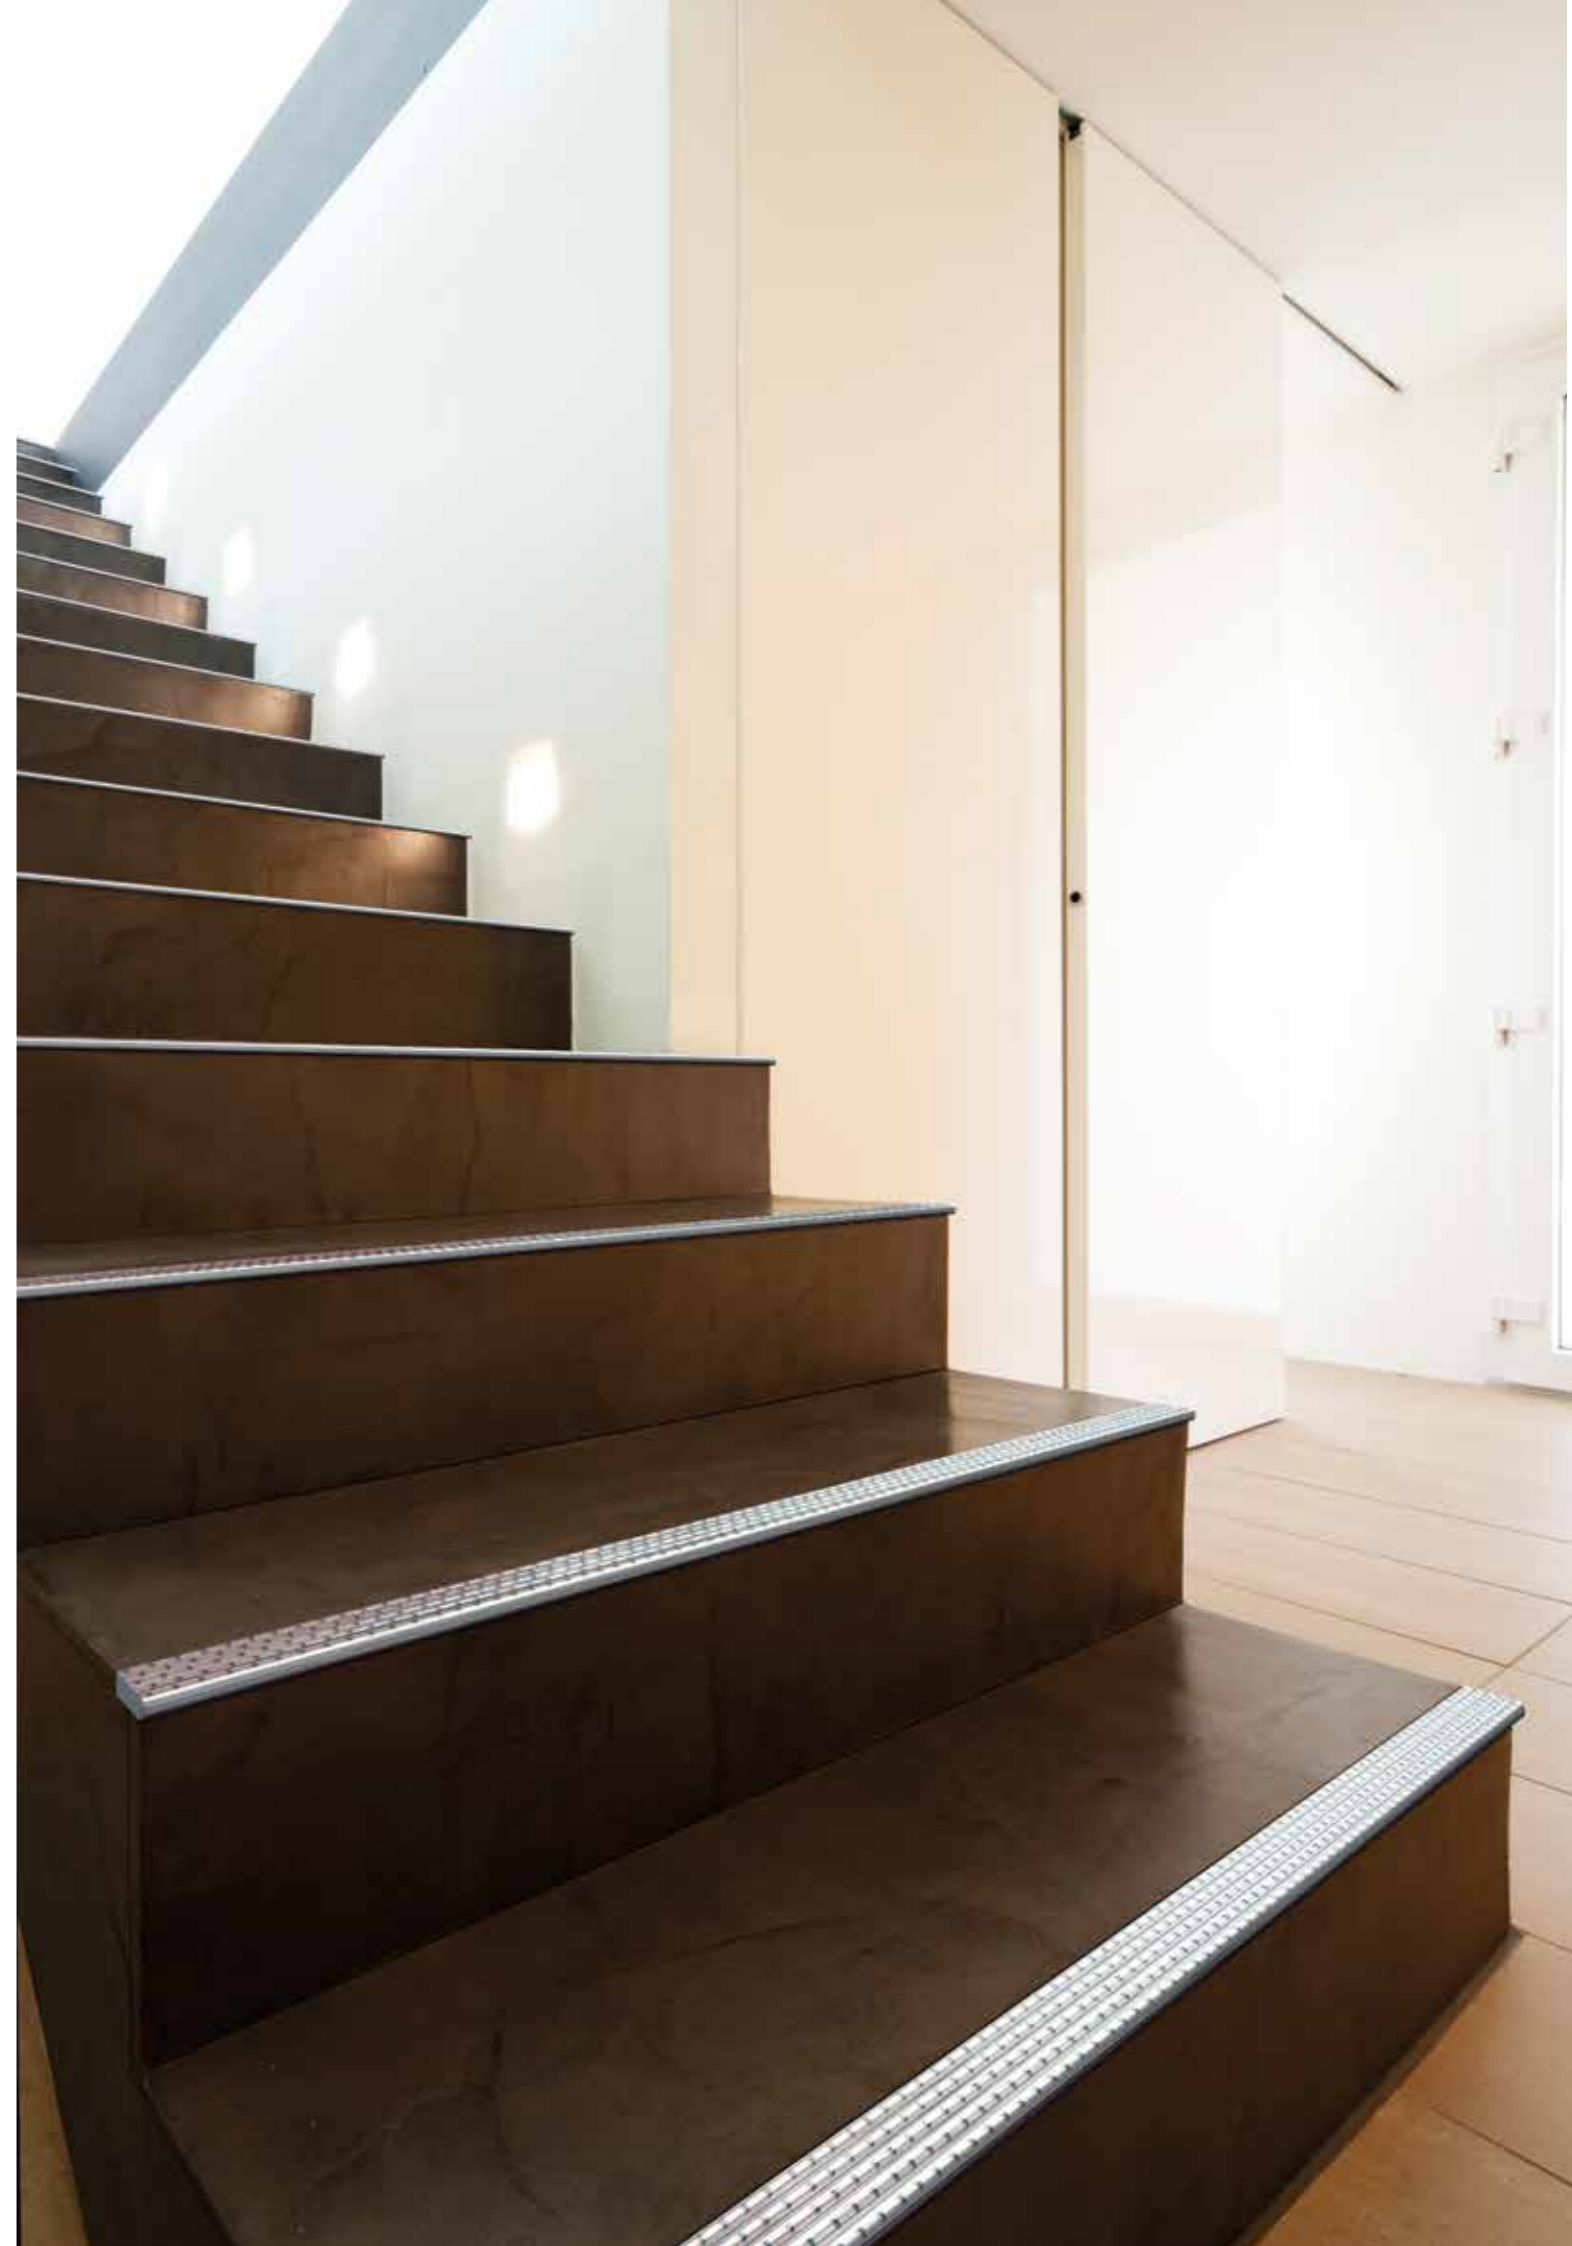

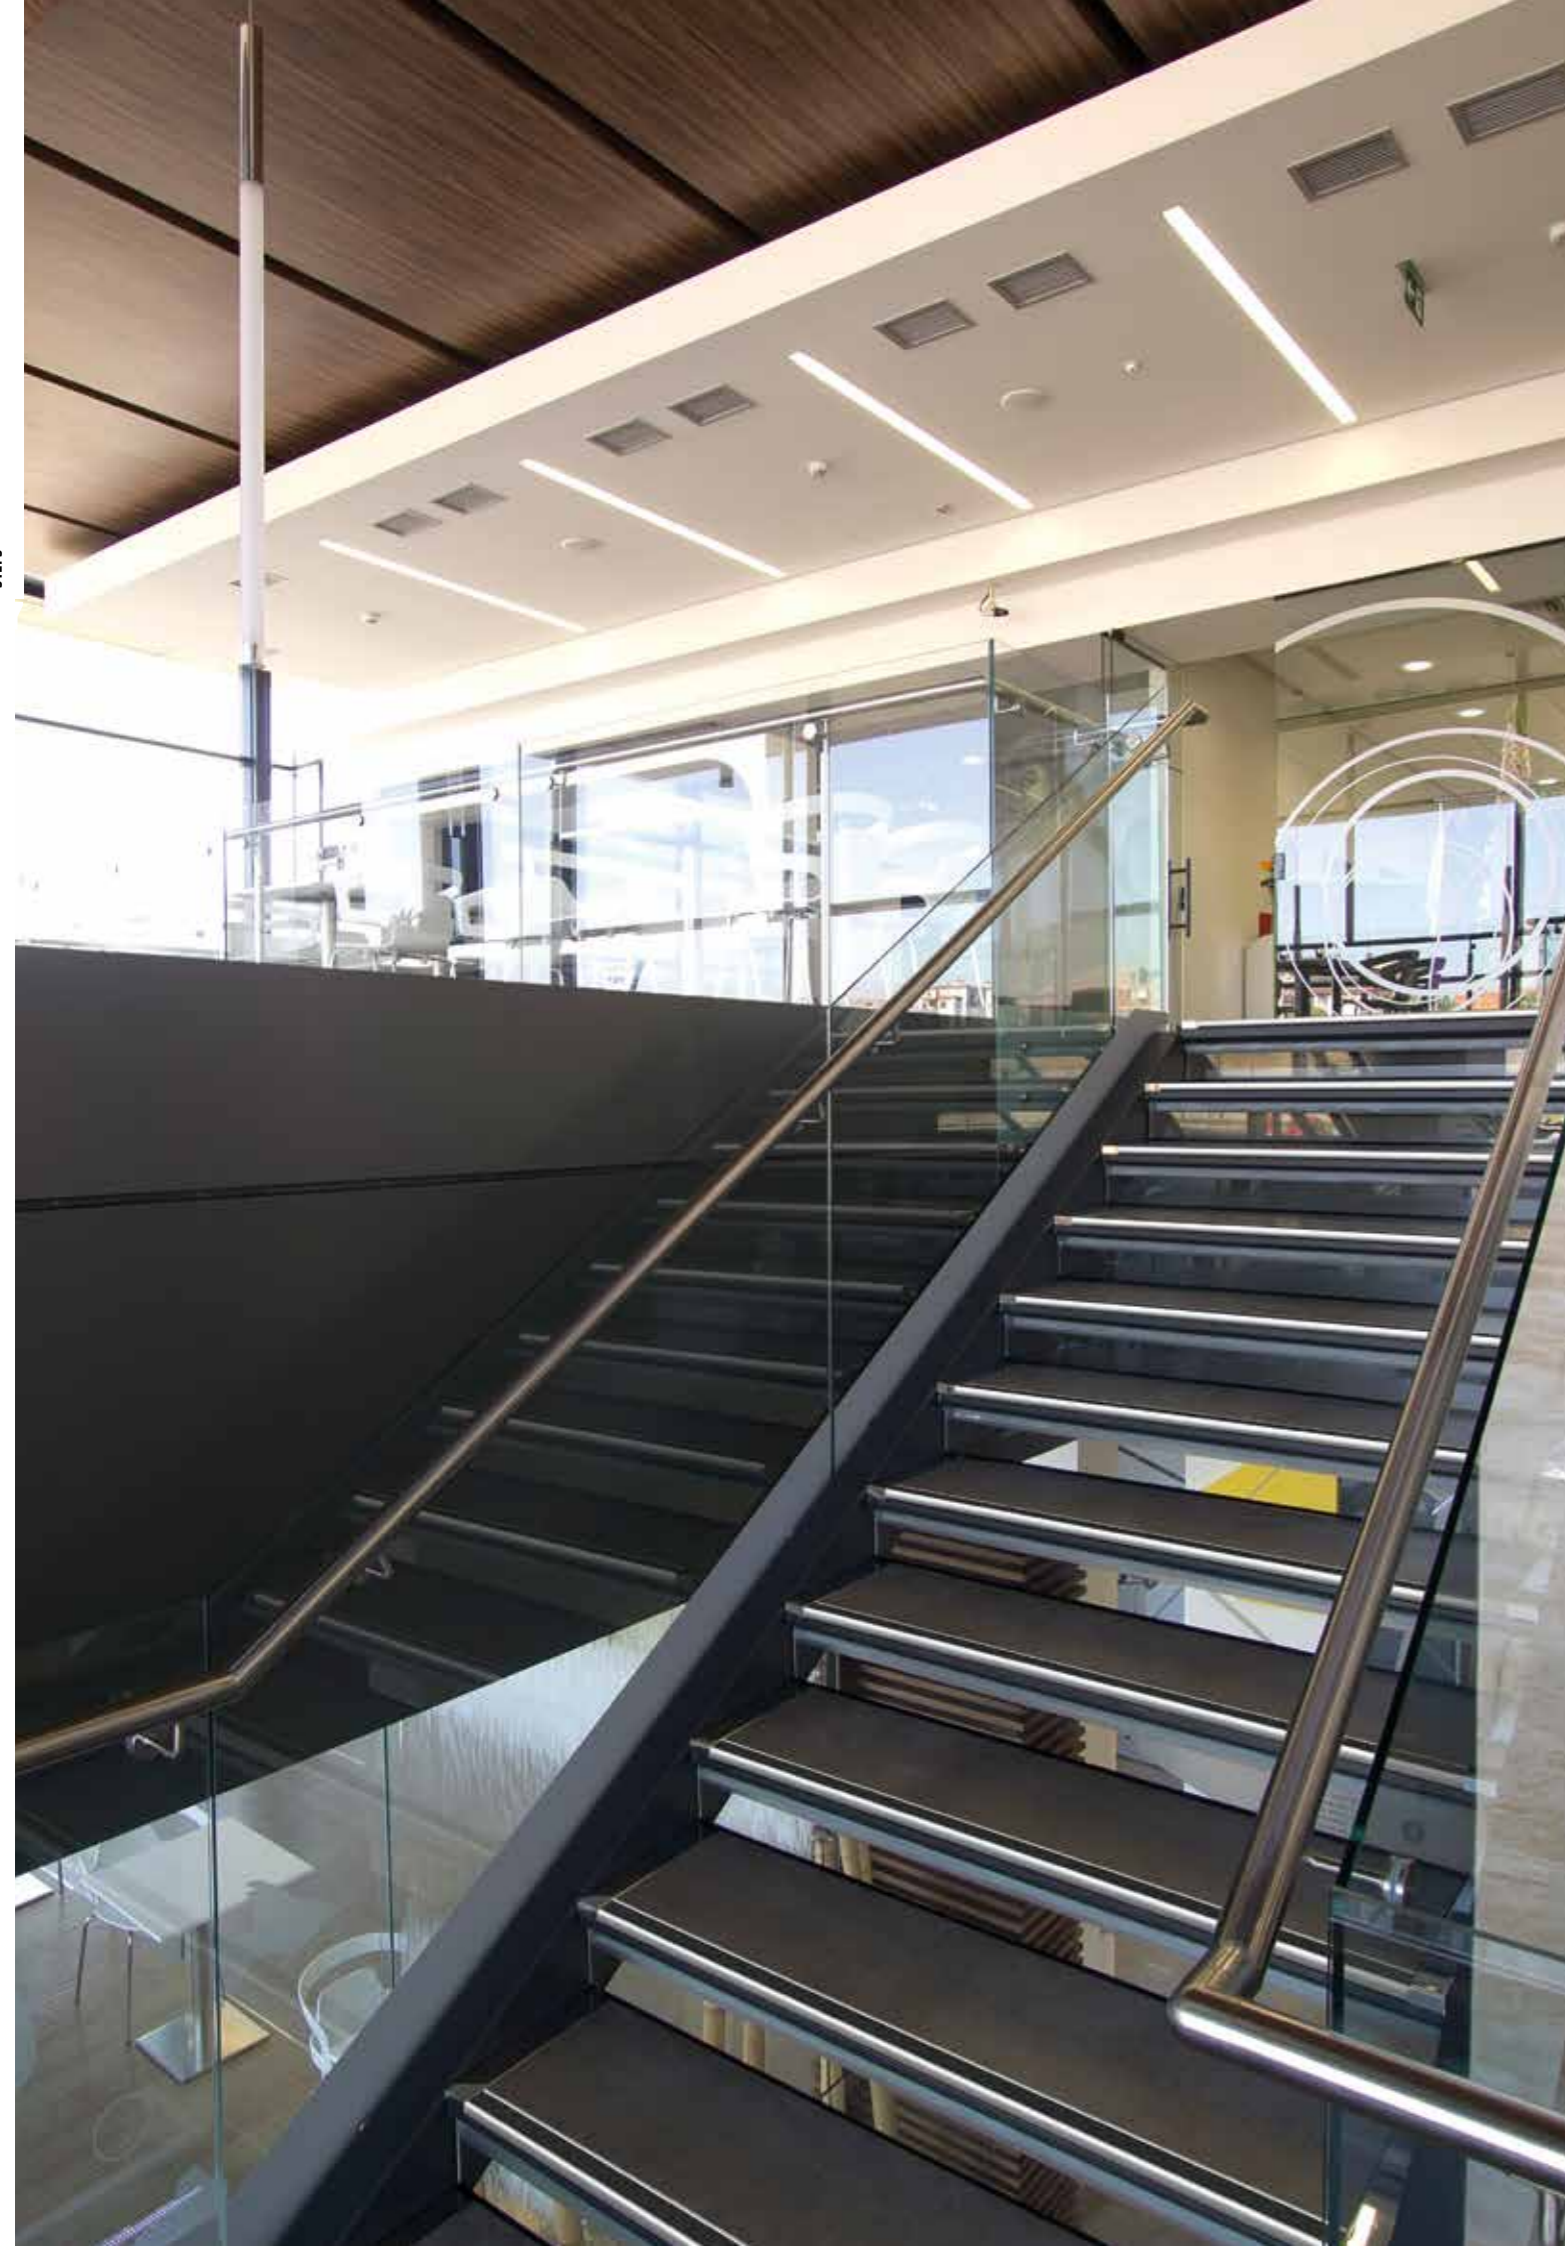


© 2019 All rights reserved by Progress Profiles. Printed in Italy

© 2019 All rights reserved by Progress Profiles. Printed in Italy

# PROSTAIR GRIP ACC

SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A

**PROSTAIR GRIP ACC** is an AISI 304/1.4301-V2A satin stainless steel profile, consisting of a punched flange, ensuring perfect anchorage to the substrate, a 36,5 and 56,5mm horizontal visually exposed surface with the carborundum stripe insert and a 20mm vertical visually exposed flat surface. The profile is available in the heights 4,5/ 8/ 10/ 12,5/ 15/ 20 mm and is equipped with end caps made of varnished plastic in satin steel-effect finish. The design of this profile together with the completing elements make it an elegant and appreciated solution also for modern stairs.

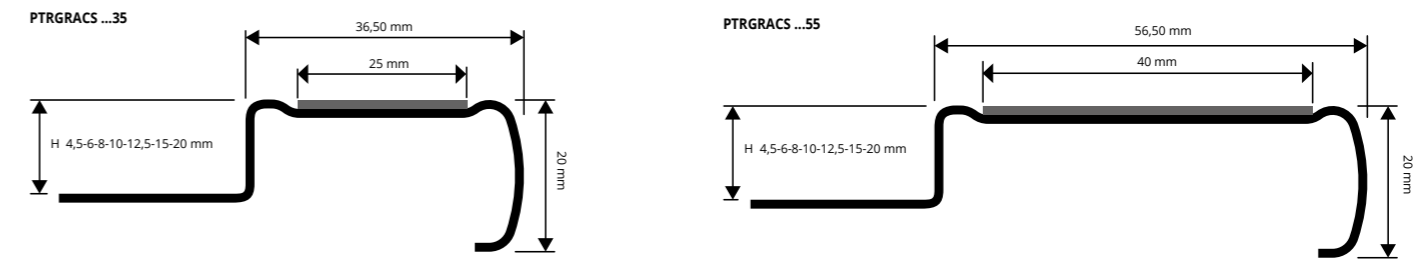

**SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A with protective film**  
 bar length 2,7 lm - width 36,50 mm - pack. 20 Pcs - 54 lm


Article	H mm	€/lm	€/Pc
PTRGRACS 04535	4,5	27,30	73,71
PTRGRACS 0635	6	27,66	74,68
PTRGRACS 0835	8	27,91	75,36
PTRGRACS 1035	10	29,36	79,27
PTRGRACS 12535	12,5	31,05	83,84
PTRGRACS 1535	15	32,81	88,59
PTRGRACS 2035	20	35,95	97,07

**SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A with protective film**  
 bar length 2,7 lm - width 56,50 mm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PTRGRACS 04555	4,5	32,70	88,29
PTRGRACS 0655	6	33,48	90,40
PTRGRACS 0855	8	34,25	92,48
PTRGRACS 1055	10	35,54	95,96
PTRGRACS 12555	12,5	37,60	101,52
PTRGRACS 1555	15	39,14	105,68
PTRGRACS 2055	20	42,23	114,02

**THE ADHESIVE CARBORUNDUM STRIP (PROGRIP) IS NOT INCLUDED WITH THE PROFILE.**  
 FOR PTRGRACS ...35 ORDER PGR... 25 (SPECIFY THE CHOSEN COLOUR).  
 FOR PTRGRACS ...55 ORDER PGR... 40 (SPECIFY THE CHOSEN COLOUR).

**COLOURS**



**END CAPS - R/L - pack. 2 Pcs (1 R and 1 L)**

Article	H mm	L mm	€/Pack.
TPTRGRACS 55/1	4,5+20	56,5	2,58
TPTRGRACS 35/1	4,5+20	36,5	2,58


Articles not for sale singly

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

**\* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks. Price to agree**

**PROGRIP** is a carborundum adhesive stripe, consisting of an elastic film coated with high wear resistant abrasive grains. It is usually employed in public as well as in domestic environments to make stair steps non-slip. The stripe is available in different colors and widths to meet any technical and aesthetic requirement. If **PROGRIP** is applied directly on the step covering, it is advisable to apply two stripes on each step, rounding their ends.

**EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS**

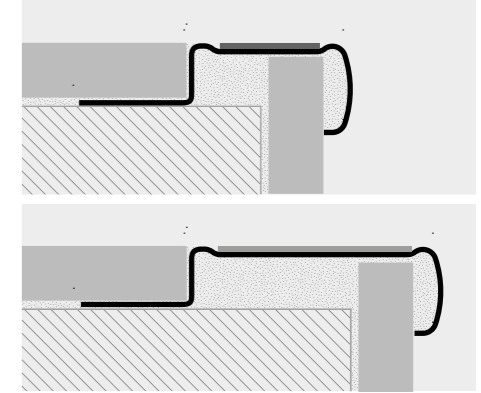

1. Choose the PROSTAIR GRIP ACC in the required height, according to the thickness of the floor covering and the desired profile width;
2. Lay the floor covering on the stair riser and apply the adhesive on the of stair tread, where the profile will be installed;
3. Fill the empty spaces under the profile with the adhesive for tiles. Lay the profile on the step tread, making sure that it is aligned with the stair riser;
4. Lay the floor covering on the stair tread and align;
5. Plaster the joints between the profile and the tiles.

# PROGRIP

ADHESIVE CARBORUNDUM - 6 COLOURS

**COLOURS**

N - Black	B - White	T - Transparent
G - Gray	Y - Yellow	M - Brown

The PGRT (transparent) are not suitable for outside use.

**ADHESIVE CARBORUNDUM NON-SLIP STRIP for STEPS**  
 rolls length 18,2 lm

Article	Width mm	€/lm	€/Roll
PGRN 25 (black colour)	25	2,11	38,40
PGRB 25 (white colour)	25	3,17	57,69
PGR T 25 (transparent)	25	2,11	38,40
PGRG 25 (grey colour)	25	3,59	65,34
PGRY 25 (yellow colour)	25	3,49	63,52
PGRM 25 (brown colour)	25	2,43	44,23
PGRN 40 (black colour)	40	3,17	57,69
PGRB 40 (white colour)	40	5,62	102,28
PGR T 40 (transparent)	40	3,17	57,69
PGRG 40 (grey colour)	40	6,32	115,02
PGRY 40 (yellow colour)	40	6,32	115,02
PGRM 40 (brown colour)	40	3,67	66,79

**\* = Production on demand with minimum quantity of 10 rolls. Delivery time 4/5 weeks. Price to agree**



Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.




# PROSTYLE GRIP ACC

SATIN FINISH STAINLESS STEEL  
AISI 304/1.4301-V2A

**PROSTYLE GRIP ACC** is a non-slip profile in AISI 304/1.4301-V2A satin stainless steel, consisting of a 40 or 60 mm horizontal top with a groove for the insertion of a non-slip carborundum stripe and a 20mm vertical flat side. The profile can be fixed with adhesive film or with screws. The particular design of this profile makes it an elegant and appreciated solution also for modern stairs.

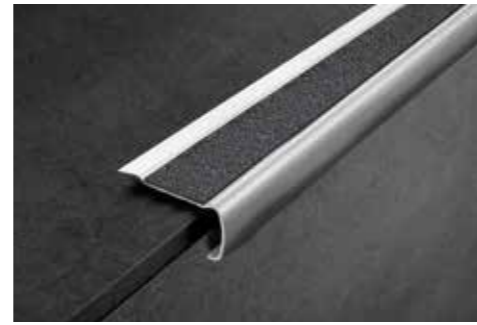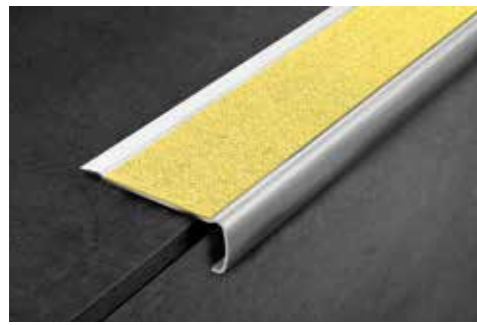


## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

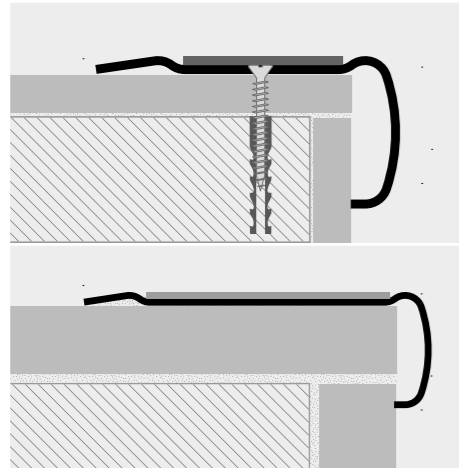

**Version with adhesive**  
1. Choose the profile according to the desired width and cut it to the necessary length; 2. Clean the surface on which the profile is to be laid, ensuring that it is dry. Remove the protective film and place the profile, applying adequate pressure on it; 3. Apply the adhesive non-slip carborundum insert of the desired color.  
**Punched version**  
1. Choose the profile according to the desired width and cut it to the necessary length; 2. Mark the position of the holes using the existing holes on the profile as reference; 3. Drill the step using a drill with 5mm diameter and insert the 5x 25mm screws; 4. Screw the profile to the step; 5. Apply the adhesive non-slip carborundum insert of the desired color.

PSYGRACS 6020  
scale 1:1

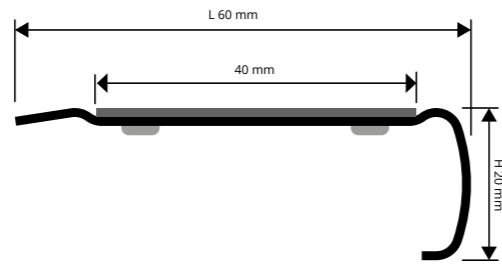

SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A with protective film  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSYGRACS 6020A	60	29,77	80,38 *
PSYGRACS 6020F	60	28,43	76,76 *

Without adhesive version deduct 3,00 €/LM to the gross price

The adhesive carborundum strip (PROGRIP) is not included with the profile.


For PSYGRACS 6020A/F order PGR... 40 (Specify the chosen colour).

For PSYGRACS 6020A/F order PGR... 25 (Specify the chosen colour).

## COLOURS



PSYGRACS 4020  
scale 1:1

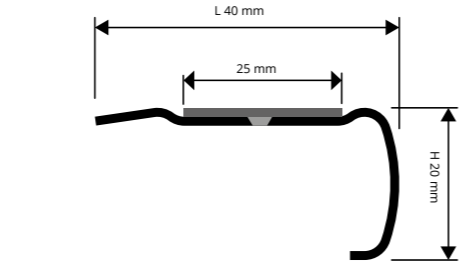

SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A with protective film  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSYGRACS 4020A	40	25,24	68,15
PSYGRACS 4020F	40	23,69	63,96

Without adhesive version deduct 3,00 €/LM to the gross price

## END CAPS STAINLESS STEEL - R/L - pack. 2 Pcs - (1 R and 1 L)

Article	L mm	€/Pack.
TPSYGRACS 6020/1	60	2,58
TPSYGRACS 4020/1	40	2,58

Articles not for sale singly

## SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

\* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks. Price to agree

# PROGRIP

ADHESIVE CARBORUNDUM - 6 COLOURS

**PROGRIP** is a carborundum adhesive stripe, consisting of an elastic film coated with high wear resistant abrasive grains. It is usually employed in public as well as in domestic environments to make stair steps non-slip. The stripe is available in different colors and widths to meet any technical and aesthetic requirement. If **PROGRIP** is applied directly on the step covering, it is advisable to apply two stripes on each step, rounding their ends.




## ADHESIVE CARBORUNDUM NON-SLIP STRIP for STEPS

rolls length 18,2 lm

Article	Width mm	€/lm	€/Roll
PGRN 25 (black colour)	25	2,11	38,40
PGRB 25 (white colour)	25	3,17	57,69
PGR 25 (transparent)	25	2,11	38,40
PGRG 25 (grey colour)	25	3,59	65,34
PGRY 25 (yellow colour)	25	3,49	63,52
PGRM 25 (brown colour)	25	2,43	44,23
PGRN 40 (black colour)	40	3,17	57,69
PGRB 40 (white colour)	40	5,62	102,28
PGR 40 (transparent)	40	3,17	57,69 *
PGRG 40 (grey colour)	40	6,32	115,02 *
PGRY 40 (yellow colour)	40	6,32	115,02 *
PGRM 40 (brown colour)	40	3,67	66,79

## COLOURS

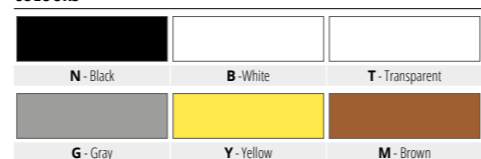

The PGR (transparent) are not suitable for outside use.





\* = Production on demand with minimum quantity of 10 rolls. Delivery time 4/5 weeks. Price to agree

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

**PROSTAIR 50** is a technical square used to make the step nonskid and non-slip, protects the ceramic stairs steps preventing from accidents. It is made up of a rigid aluminium base equipped with a particular toothing on the vertical stem which strengthens the anchorage of the adhesive/tile to the square. The aluminium base varies according to the thickness of the tile used in the step, and to a lined insert in vinyl rubber available in several colors. The insert is already applied to the aluminium base. It is compulsory in public places in compliance with EEC norms and prevents from accidents.

# PROSTAIR 50

NATURAL ALUMINIUM  
+ VINYL RESIN / RUBBER INSERT

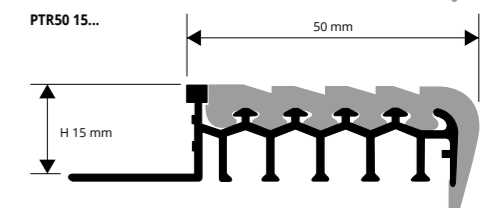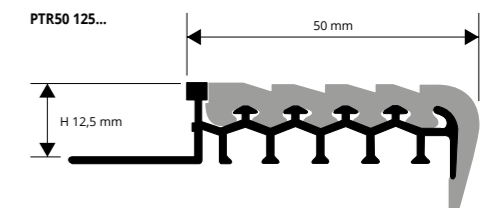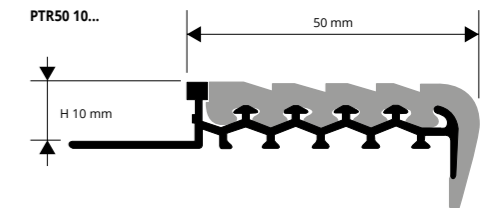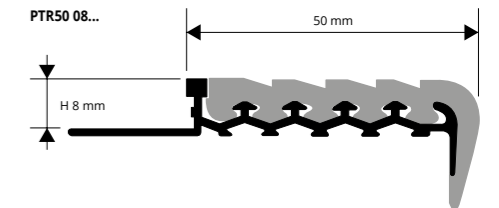


## NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PTR50 08...	8	16,91	45,66
PTR50 10...	10	17,60	47,52
PTR50 125...	12,5	18,14	48,98
PTR50 15...	15	19,07	51,49

Available in the colours: G - N - B - A.  
The code of the selected colour must be added to the article code.  
E.g.: PTR50 08... (chosen colour grey) PTR50 08G.


## COLOURS




## END CAP IN PVC - pack. 2 Pcs (1 R and 1 L)

Article	H mm	€/Pack.
TPTR50 .../1	8-10-12,5-15	2,58

Available in the colours: G - N - B - A.  
The code of the selected colour must be added to the article code.  
E.g.: TPTR50 ... (chosen colour grey) TPTR50 G.  
Articles not for sale singly



## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

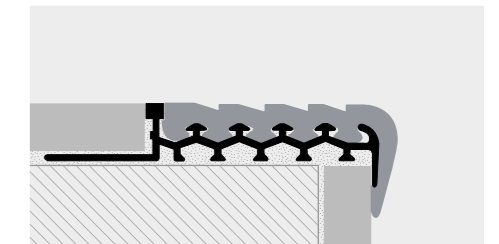

1. Choose a PROSTAIR 50 height and color corresponding to the thickness of the tile. 2. Fix the riser laying it at the appropriate and definitive height. 3. Fill the empty spaces under the square completely with adhesive. 4. Rest the adhesive on the tread, lay the square with the base cut in the adhesive and line it up so that the square covers the tile edge of the riser. 5. Lay the tiles of the tread lining them up with upper part of the square so that it meets with the edge.

# INTERCHANGEABLE INSERT for Prostair 50

VINYL RESIN / RUBBER

## INTERCHANGEABLE VINYL RESIN / RUBBER INSERT

bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm	€/lm	€/Pc
PTG50...	8-10-12,5-15	5,87	15,85

Universal insert suitable for four profile heights.  
Available in the colours: G - N - B - A.  
The code of the selected colour must be added to the article code.  
E.g.: PTG50... (chosen colour grey) PTG50 G.




# PROSTAIR

NATURAL ALUMINIUM  
+ VINYL RESIN / RUBBER INSERT

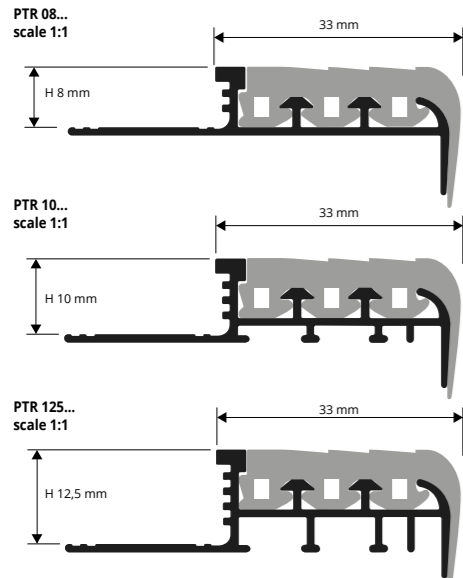

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

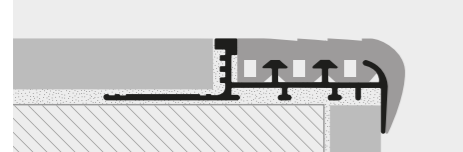

1. Choose the PROSTEP/PROSTAIR in the required width and colour according to the thickness of the tile. 2. First fix the riser part, placing it at the correct and final height. 3. Fill the empty spaces under the profile with the tile adhesive. 4. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile. 5. Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile.


PROSTAIR is a step nosing profile used to improve slip and slide resistance on the step, to protect ceramic steps and to prevent accidents. It consists of a rigid aluminium base and a changeable vinyl rubber insert available in various colours and widths. Compulsory in public environments to comply with EEC accident-prevention standards.



NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	€/ml	€/Pack.
PTGRA	3,61	9,75
PTGRB	3,61	9,75
PTGRN	3,61	9,75
PTGRG	3,61	9,75

### COLOURS

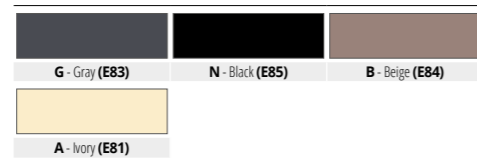

INTERCHANGEABLE VINYL RESIN / RUBBER INSERT  
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm	€/ml	€/Pack.
PTR 08...	8	10,63	28,70
PTR 10...	10	11,47	30,97
PTR 125...	12,5	11,85	32,00

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code. E.g.: PTR 08... (chosen colour grey) PTR 08G.

END CAP IN PVC - pack. 2 Pcs (1 R and 1 L)


Article	H mm	€/Pack.
TPT 08.../1	8	2,58
TPT 10.../1	10	2,58
TPT 125.../1	12,5	2,58

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code. E.g.: TPT 08... (chosen colour grey) TPT 08G. Articles not for sale singly



# PROSTEP

RIGID VINYL RESIN  
+ VINYL RESIN / RUBBER INSERT

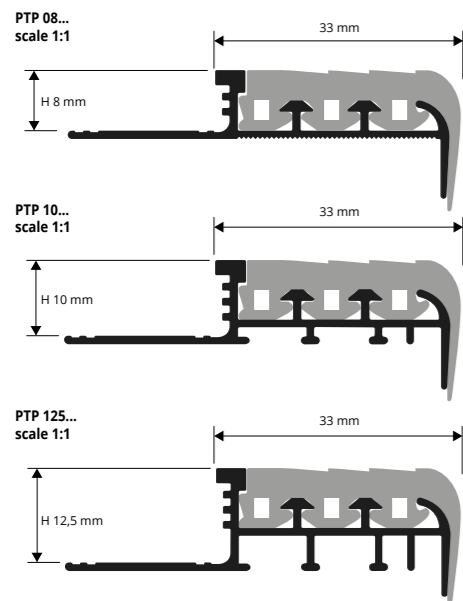

For instructions see the product above


PROSTEP is a step nosing profile used to improve slip and slide resistance on the step, to protect ceramic steps and to prevent accidents. It consists of a rigid base in high-strength vinyl resin and a changeable vinyl rubber insert available in various colours and widths. Compulsory in public environments to comply with EEC accident-prevention standards.



IMPACT PROOF VINYL RESIN + VINYL RESIN / RUBBER INSERT  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	€/lm	€/Pc
PTGRA	3,61	9,75
PTGRB	3,61	9,75
PTGRN	3,61	9,75
PTGRG	3,61	9,75

### COLOURS




INTERCHANGEABLE VINYL RESIN / RUBBER INSERT  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/ml	€/Pc
PTP 08...	8	5,31	14,34
PTP 10...	10	5,87	15,85
PTP 125...	12,5	6,38	17,23

END CAP IN PVC - pack. 2 Pcs (1 R and 1 L)

Article	H mm	€/Pack.
TPT 08.../1	8	2,58
TPT 10.../1	10	2,58
TPT 125.../1	12,5	2,58

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code. E.g.: TPT 08... (chosen colour grey) TPT 08G. Articles not for sale singly



PROBRASTE is a very elegant step nosing profile used to improve slip and slide resistance on the step. Made in natural and polished brass or natural and anodized silver aluminium, the upper part is knurled to increase adherence. Compulsory in public buildings to comply with accident-prevention regulations. Recommended for elegant, refined surroundings and for steps in wood, tiles, melamine-coated/laminated wood, marble or natural stones. Width: 8, 10, 12,5 mm.




NATURAL BRASS thermo packed 5 Pcs  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PBPON 10	10	20,40	55,08
PBPON 125	12,5	21,57	58,24

POLISHED BRASS thermo packed  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PBPOL 10	10	23,20	62,64
PBPOL 125	12,5	24,35	65,75

### COLOURS



NATURAL ALUMINIUM thermo packed 5 Pcs  
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm	€/lm	€/Pc
PBPAN 08	8	5,08	13,72
PBPAN 10	10	5,35	14,45
PBPAN 125	12,5	5,72	15,44

ANODIZED SILVER ALUMINIUM thermo packed  
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm	€/lm	€/Pc
PBPAA 08	8	6,45	17,42
PBPAA 10	10	6,72	18,14
PBPAA 125	12,5	7,09	19,14

# PROBRASTE

KNURLED NATURAL AND POLISHED BRASS  
NATURAL AND ANODIZED SILVER ALUMINIUM

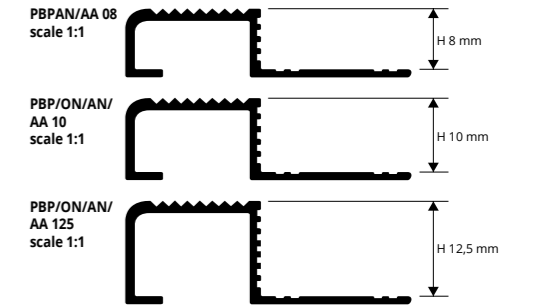

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

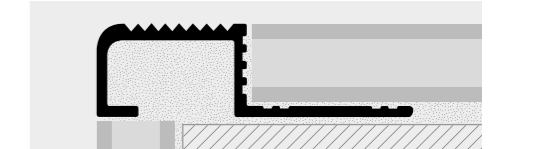

1. Choose the PROBRASTE in the required width and colour according to the thickness of the tile (stairs). 2. First fix the riser part, placing it at the correct and final height. 3. Fill the empty spaces under the tread, lay the profile with the tile adhesive. 4. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile. 5. Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive. Oxidation marks in the polished/natural brass range may be easily removed with specific chemical products (Sidol-Smac).

# PROSTAIR BOTTOM / STRIP

POLISHED, SATIN FINISH STAINLESS  
STEEL AISI 316/1.4404-V4A




PROSTAIR BOTTOM  
POLISHED STAINLESS STEEL AISI 316/1.4404-V4A - pack. 20 Pcs

Article	Ø mm	€/Pc	€/pack
PTRB 3520	35	5,10	102,00

### INSTRUCTIONS FOR LAYING METHODS

1. Put PROSTAIR BOTTOM TEMPLATE on the desired zone. 2. Score on the support the position of the necessary holes. 3. Remove the template and drill the substrate with a tip 4 mm for a depth of approximately 2.5 cm. 4. Open the holes already made with a 8mm drill bit. 5. Remove dust residues. 6. Fill the hole with PROSKIRTING FIX or PROBAND FIX. 7. Put in the hole PROSTAIR BOTTOM.




PROSTAIR BOTTOM STRIP  
SATIN FINISH STAINLESS STEEL AISI 316/1.4404-V4A - pack. 10 Pcs

Article	L x H mm	€/Pc	€/pack
PTRB 28035	280 X 35	29,82	298,20

### INSTRUCTIONS FOR LAYING METHODS

1. Put PROSTAIR BOTTOM STRIP on the desired zone. 2. Scoring on the support in correspondence of the stems the points at which pierce. 3. Drill the substrate with a tip 4 mm for a depth of approximately 2.5 cm. 4. Open the holes already made with a 8mm drill bit. 5. Remove dust residues. 6. Fill the hole with PROSKIRTING FIX or PROBAND FIX. 7. Put in the hole PROSTAIR BOTTOM STRIP.

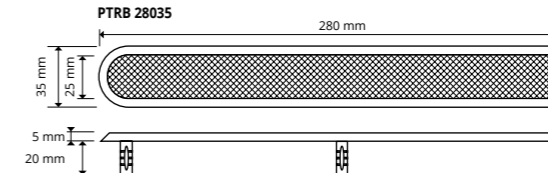


# PROSTAIR BOTTOM TEMPLATE for PROSTAIR BOTTOM

ZINC-PLATED STEEL

PROSTAIR BOTTOM TEMPLATE is a mold, made in zinc-plated steel, which allows to score the points where to drilling for the mounting of PROSTAIR BOTTOM. PROSTAIR BOTTOM TEMPLATE has A Size of 30 x 44.5 cm and is Equipped with 48 holes of a diameter 4 mm. Provided with circular joints which can be connected to other molds.

ZINC-PLATED STEEL  
pack. 4 Pcs

Article	L x H mm	€/Pc	€/pack
PTRTEM	445 x 300	153,99	615,96

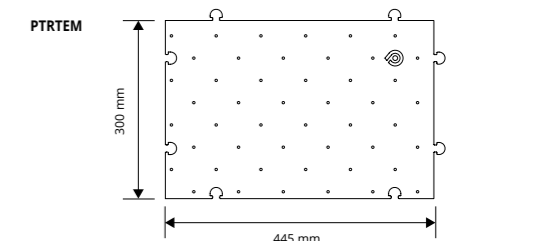



\* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks. Price to agree

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


# PROTERMSTEP ACC

POLISHED, SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A

**PROTERMSTEP ACC** is the new step cover profile made of stainless steel. Designed to protect the edge of the step and to hide the joint between the tread and the step rise. The special notched shape in the upright stem provides it with excellent anchorage between floor/glue/profile. Reversible profile.

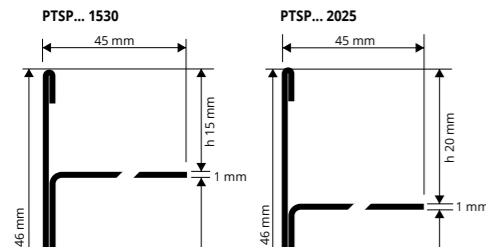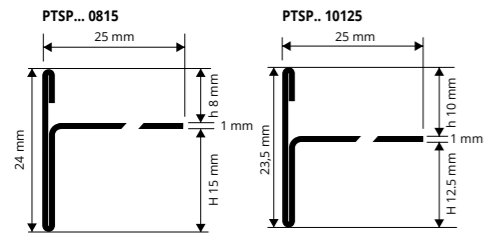

EXAMPLES OF LAYING for instructions see the product below

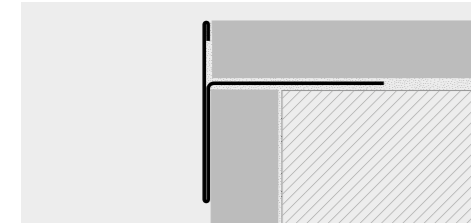

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film  
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	h / H mm	€/lm	€/Pc
PTSPAC 0815	08 / 15	14,81	39,99
PTSPAC 10125	10 / 12,5	14,81	39,99
PTSPAC 1530	15 / 30	28,35	76,55
PTSPAC 2025	20 / 25	28,35	76,55

EXTERNAL CORNERS - pack. 10 Pcs

Article	h / H mm	€/Pc	€/Pack.
REPTSAC 0815	08 / 15	34,64	346,40
REPTSAC 10125	10 / 12,5	34,64	346,40
REPTSAC 1530	15 / 30	34,64	346,40
REPTSAC 2025	20 / 25	34,64	346,40

JUNCTION H 10 - 12,5 - 15 - 20 mm - pack. 10 Pcs

Article	h / H mm	€/Pc	€/Pack.
GIPTSAC 0815	08 / 15	6,34	63,40
GIPTSAC 10125	10 / 12,5	6,34	63,40
GIPTSAC 1530	15 / 30	6,34	63,40
GIPTSAC 2025	20 / 25	6,34	63,40

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS




SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A  
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	h / H mm	€/lm	€/Pc
PTSPACS 0815	08 / 15	19,25	51,98
PTSPACS 10125	10 / 12,5	19,25	51,98
PTSPACS 1530	15 / 30	36,85	99,50
PTSPACS 2025	20 / 25	36,85	99,50

COLOURS



ON DEMAND	
AC - Polished stainless st. AISI 304/1.4301-V2A	ACS - Satin finish stainless st. AISI 304/1.4301-V2A

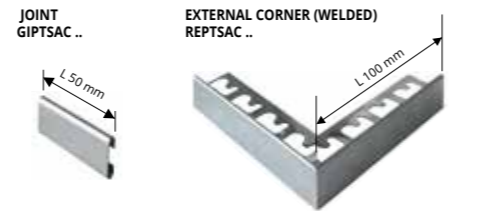


# PROTERMSTEP ALL

NATURAL AND ANODIZED SILVER ALUMINIUM

**PROTERMSTEP ALL** is the new step cover profile made of natural and anodized aluminium. Designed to protect the edge of the step and to hide the joint between the tread and the step rise. The special notched shape in the upright stem provides it with excellent anchorage between floor/glue/profile.

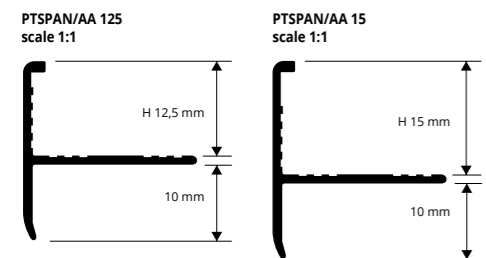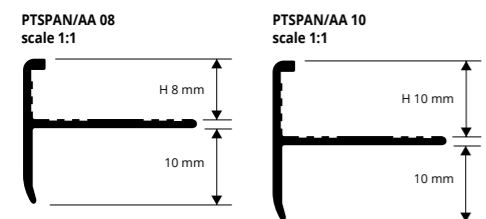

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

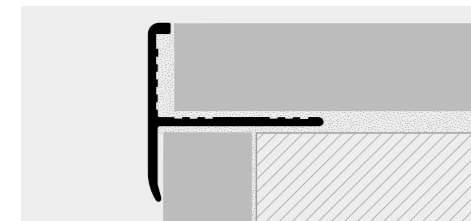

NATURAL ALUMINIUM  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PTSPAN 08	8	2,80	7,56
PTSPAN 10	10	2,90	7,83
PTSPAN 125	12,5	3,07	8,29
PTSPAN 15	15	3,34	9,02

1. Choose the PROTERMSTEP in the required width and colour according to the thickness of the tile (stairs). 2. First fix the riser part, placing it at the correct and final height. 3. Fill the empty spaces under the profile with the tile adhesive. 4. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile. 5. Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive.



ANODIZED SILVER ALUMINIUM thermo packed  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PTSPAA 08	8	3,70	9,99
PTSPAA 10	10	3,81	10,29
PTSPAA 125	12,5	3,97	10,72
PTSPAA 15	15	4,23	11,42


COLOURS

AN - Natural aluminium	AA - Anodized silver aluminium
------------------------	--------------------------------

**PROSIDE WALK** is a perimeter profile in aluminium conveniently designed to protect the edges of tiles with a thickness of 10, 12.5 and 15 mm laid on the sidewalks and to protect the screed. The profile is provided with a punched flange that ensures its fixing to the support. The punched flange is also provided with small holes that guarantee the temporary fixing of the profile with nails.

# PROSIDE WALK

VARNISHED / COATED ALUMINIUM

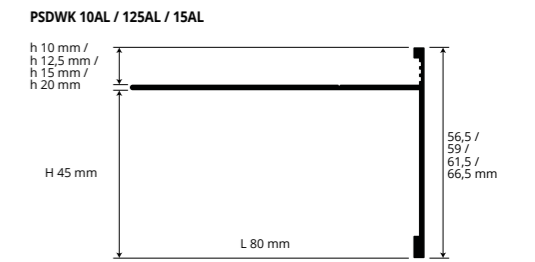

VARNISHED EMBOSSED ALUMINIUM  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	h mm	H mm	L	€/lm	€/Pc
PSDWK 10AL...	10	45	80	16,74	45,20
PSDWK 125AL...	12,5	45	80	17,00	45,90
PSDWK 15AL...	15	45	80	17,25	46,58
PSDWK 20AL...	20	45	80	18,25	49,28

EMBOSSED COLOURS

A - Anthracite grey - (no RAL)	GF - Gray (7038)
--------------------------------	------------------

\* EMBOSSED COLOURS ON DEMAND

BF - White (9010)	TF - Dark brown (8019)	C - Corten
EF - Beige (1019)		


EXTERNAL CORNERS - pack. 10 Pcs

Article	h mm	H mm	L	€/Pc	€/Pack.
AEPSDWK 10AL...	10	45	80	18,03	180,30
AEPSDWK 125AL...	12,5	45	80	18,54	185,40
AEPSDWK 15AL...	15	45	80	19,57	195,70
AEPSDWK 20AL...	20	45	80	21,05	210,50

JOINTS - pack. 10 Pcs

Article	€/Pc	€/Pack.
GINSDWK 10AL...	5,15	51,50
GINSDWK 125AL...	5,15	51,50
GINSDWK 15AL...	5,15	51,50
GINSDWK 20AL...	5,15	51,50


AEPSDWK external corner (welded)




GINSDWK joint



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

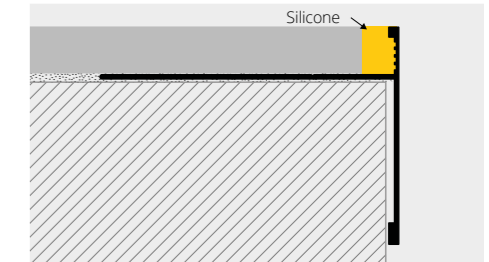

1. Choose "PROSIDE WALK" according to the tile thickness and desired colour. 2. Cut "PROSIDE WALK" to the desired length and fix to the screed with nails. 3. Lay the tiles, leaving about 5 mm between tiles and profile. 4. Seal the space between tiles and profile with PROBAND FIX.

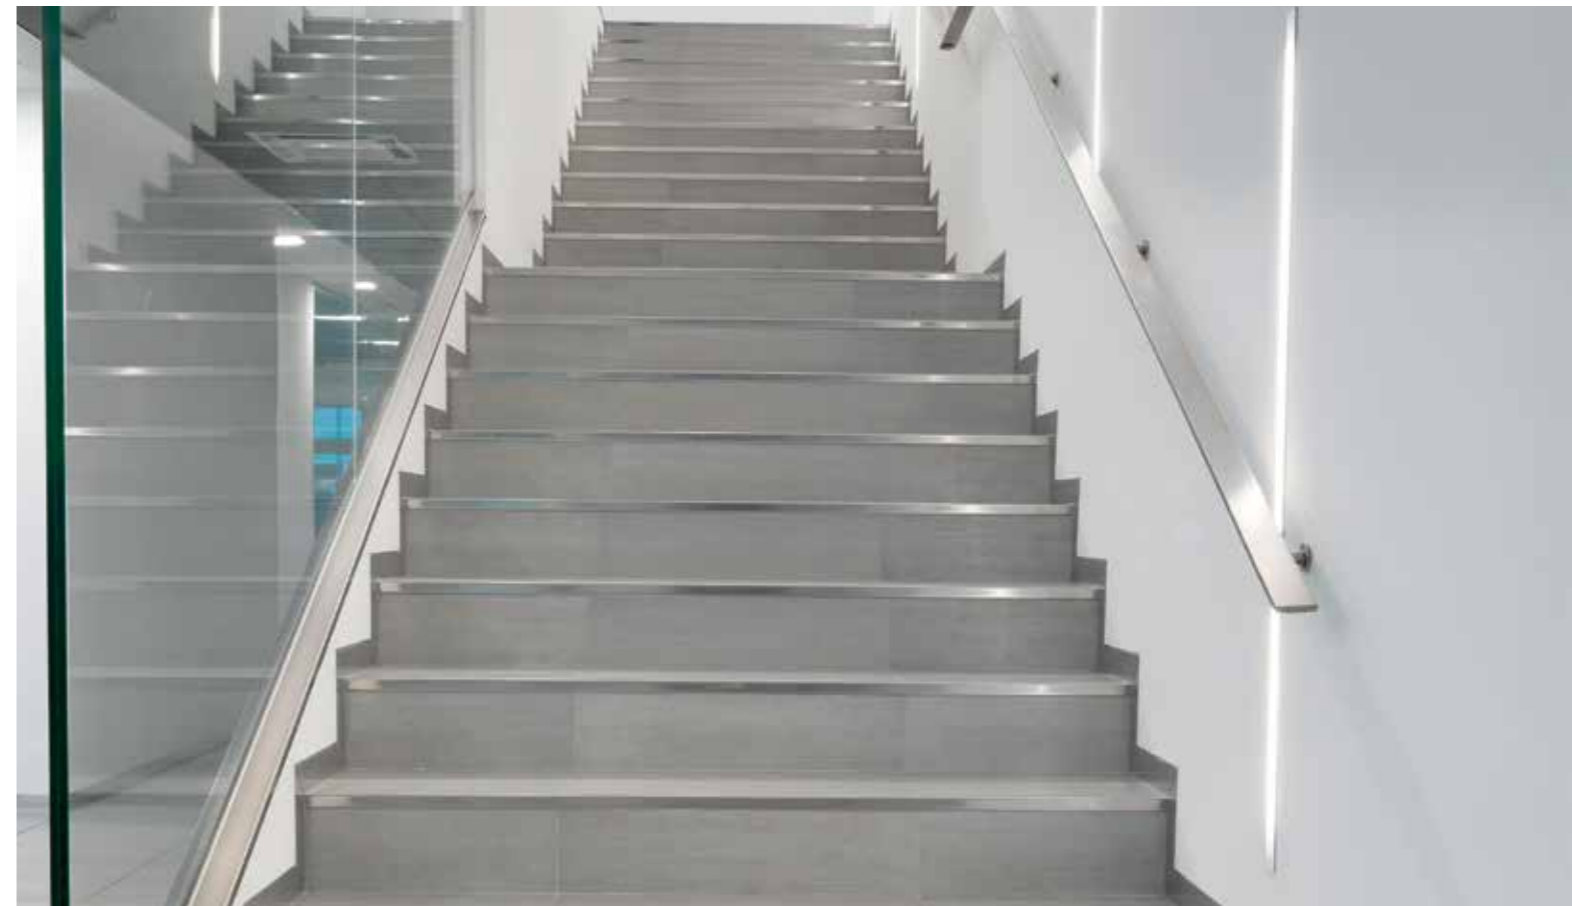

News 2019


\* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

# PROSTAIR LED

ANODIZED SILVER ALUMINIUM  
- FLAT - LED

PROSTAIR LED is an aluminium profile available in the silver anodized finishes, that can be fixed with adhesive or dowels to the step tread. It has a grooved non-slip 52,5mm wide horizontal surface and an integrated LED lighting system, placed on its 43,5mm high vertical side. The integrated LED system generates cold or warm light and is protected by a matt or transparent polycarbonate plate, provided with a special fixing system, that allows it to be removed any time maintenance on the lighting system should be required. Its design and to the range of finishes available, together with its easy installation make **PROSTAIR LED** an appreciated solution both in public and in residential spaces.

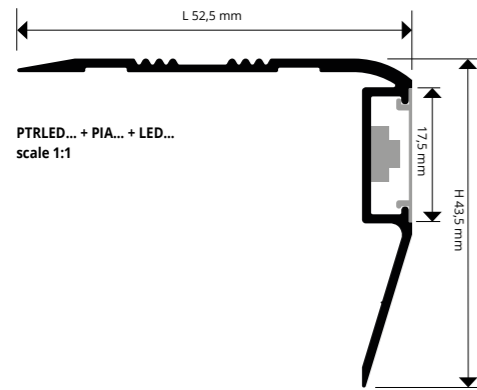

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose PROSTAIR LED depending on the desired finish, light effect and polycarbonate plate; 2. If you are using the version with adhesive, clean first the surface where the profile will be installed. Once the surface has dried, remove the protective film and install the profile, applying adequate pressure on it; 3. If you are using the punched version, place the profile on the step tread and mark the position of the profile holes on the step tread; 4. Drill the step tread and fasten the profile using plugs; 5. Connect the LED to the low tension power supply and install the polycarbonate plate.

### ANODIZED SILVER ALUMINIUM

bar length 2,7 lm - pack. 20 Pcs - 54 lm

ADAPTOR LED, LED & FLAT NOT INCLUDED

Article	H x L mm	€/lm	€/Pc
PTRLEDAA 5040	43,5 X 52,5	20,09	54,24
PTRLEDAA 5040A (adhesive)	43,5 X 52,5	23,18	62,59
PTRLEDAA 5040F (punched)	43,5 X 52,5	21,63	58,40

### ADHESIVE FLEXIBLE LED COIL

length 5 lm - pack. 1 ROLL

Article	€/lm	€/Pack.
LEDN (neutral light)	17,72	88,60
LEDF (cold light)	17,72	88,60
LEDC (hot light)	17,72	88,60

### COLOURS



### POLYCARBONATE'S FLAT

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	Finish	€/lm	€/Pc
PIAL 17	transp.	4,07	10,99
PIAO 17		4,07	10,99

ENDCAPS- R / L - pack. 6 Pcs (3 R and 3 L)

Article	H x L mm	€/Pc	€/Pack.
TPTRLEDAA 5040/3	43,5 X 52,5	3,61	21,66



LED ADAPTOR AC/DC 75W - 12V (15 lm)

Article	€/Pc
ALL 7512 (supplies 15 lm)	64,89

LED ADAPTOR AC/DC 25W - 12V (5 lm)

Article	€/Pc
ALL 2512 (supplies 5 lm)	44,50

© 2010 All rights reserved by Progress Profiles, Printed in Italy


© 2010 All rights reserved by Progress Profiles, Printed in Italy



# PROSTYLE

ROUNDED STEP NOSING  
STAINLESS STEEL AISI 304/1.4301-V2A

**PROSTYLE** is a technical/decorative profile in stainless steel AISI 304/1.4301-V2A for ceramic tile/wood steps. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. Elegant profile for all public/private environments. In order to perfect placing and to look after details, external angles and closing caps are available.

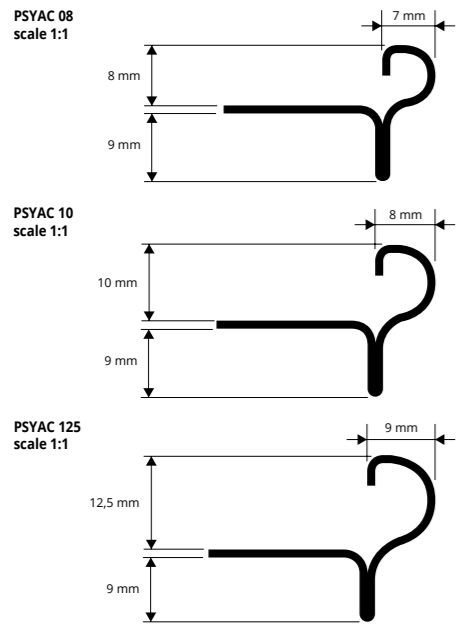

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film  
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10mm

Article	H mm	€/lm	€/Pc
PSYAC 08	8	12,91	34,86
PSYAC 10	10	13,31	35,94
PSYAC 125	12,5	13,98	37,75

### COLOURS



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS




### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROSTYLE with suitable height for the thickness of the floor (stairs). 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

## JOINTS and END CAPS for Prostyle stainless steel

VARNISHED PLASTIC STEEL EFFECT AND STAINLESS STEEL

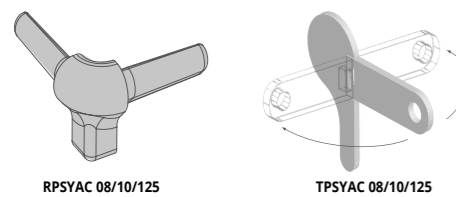

VARNISHED PLASTIC STEEL EFFECT JOINT - pack. 20 Pcs

Article	€/Pc	€/Pack.
RPSYAC 08	6,34	126,80
RPSYAC 10	6,34	126,80
RPSYAC 125	6,34	126,80


STAINLESS ST. END CAPS H 8 - 10 - 12,5 mm - pack. 20 Pcs

Article	€/Pc	€/Pack.
TPSYAC 08	3,07	61,40
TPSYAC 10	3,07	61,40
TPSYAC 125	3,07	61,40

# PROSTYLE

KNURLED, ROUNDED STEP NOSING  
NATURAL, POLISHED AND CHROMED BRASS


**PROSTYLE** is a technical/decorative profile in natural brass, as well as with polished or chromed finish, for ceramic tile/wood steps. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. It is knurled on the top to make the profile non-slip. Elegant profile for all public/private environments. Shrink-wrapped profile with bar code.

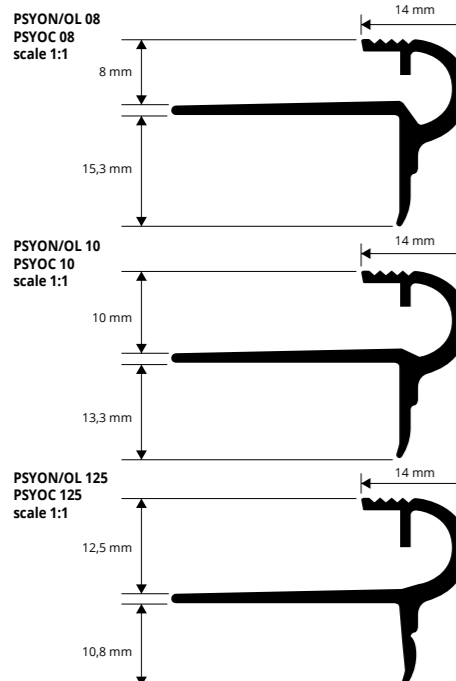

CHROMED BRASS thermo packed  
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PSYOC 08	8	25,34	68,42 *
PSYOC 10	10	26,13	70,55 *
PSYOC 125	12,5	27,30	73,71 *

### COLOURS



POLISHED BRASS thermo packed  
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PSYOL 08	8	21,79	58,83 *
PSYOL 10	10	22,42	60,53 *
PSYOL 125	12,5	23,59	63,69 *

NATURAL BRASS thermo packed  
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PSYON 08	8	17,88	48,28
PSYON 10	10	18,51	49,98
PSYON 125	12,5	19,99	53,97

\* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks. Price to agree


Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

# PROSTYLE

KNURLED, ROUNDED STEP NOSING  
GOLD AND SILVER ANODIZED ALUMINIUM


**PROSTYLE** is a technical/decorative profile for ceramic tile/wood steps made in gold-silver anodized aluminium. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. It is knurled on the top to make the profile non-slip. Elegant profile for all public/private environments. Shrink-wrapped profile with bar code.

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

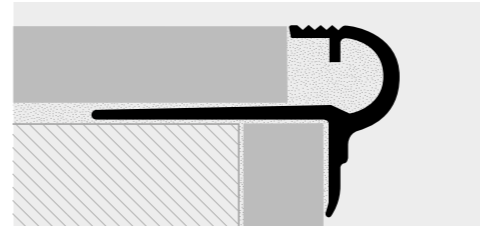

1. Choose the PROSTYLE in the required width and colour according to the thickness of the tile. 2. First fix the riser part, placing it at the correct and final height. 3. Fill the empty spaces under the profile with the tile adhesive. 4. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its vertical part covers the edge of the riser tile. 5. Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive. Oxidation marks in the polished/natural brass range may be easily removed with specific chemical products (Sidol-Smac).

### COLOURS




ANODIZED SILVER ALUMINIUM thermo packed  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PSYAA 08	8	7,35	19,85
PSYAA 10	10	7,73	20,87
PSYAA 125	12,5	8,25	22,28

ANODIZED GOLD ALUMINIUM thermo packed  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PSYAO 08	8	7,35	19,85 *
PSYAO 10	10	7,73	20,87
PSYAO 125	12,5	8,25	22,28

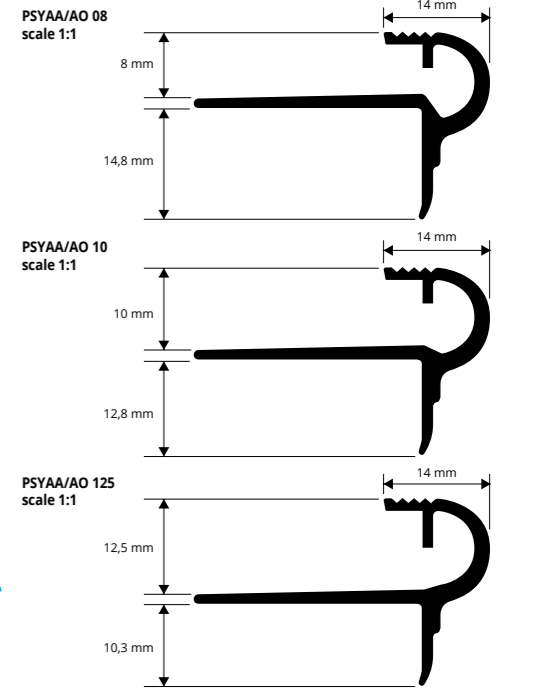

## JOINTS and CAPS for Prostyle brass and aluminium

POLISHED, CHROMED AND NATURAL BRASS (see page 122) - GOLD AND SILVER ANODIZED ALUMINIUM

### VARNISHED PLASTIC JOINT - pack. 20 Pcs


Article	€/Pc	€/Pack.
RPSY... 08-10-125	6,34	126,80

Universal, suitable for three profile heights  
Available: OL - OC - AA - AO.  
The code of the selected colour must be added to the article code.  
E.g.: RPSY... 08 (chosen colour polished brass) RPSYOL 08

### BRASS - ALUM. CAPS H 8 - 10 - 12,5 mm - pack. 20 Pcs

Article	€/Pc	€/Pack.
TPSY... 08	3,07	61,40
TPSY... 10	3,07	61,40
TPSY... 125	3,07	61,40

Available: OL - OC - AA - AO.  
The code of the selected colour must be added to the article code.  
E.g.: TPSY... 08 (chosen colour polished brass) TPSYOL 08.

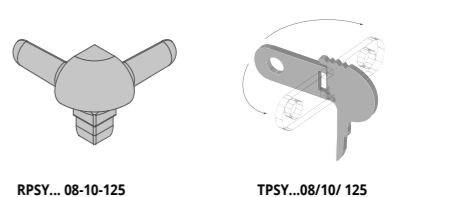

**PROSTEP INS** is a non-slip profile in aluminium that allows to connect the rise and the tread in case of stairs covered with wooden or laminate flooring. The profile has to be laid together with rise and tread. It is equipped with a punched flange that guarantees its fixing. **PROSTEP INS** in anodized aluminium is suitable for any stair covered with wooden flooring.

# PROSTEP INS

ANODIZED SILVER ALUMINIUM




ANODIZED SILVER ALUMINIUM  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTSAA 105	10,5	5,40	14,58
PTSAA 16	16	5,82	15,71


### COLOURS



### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

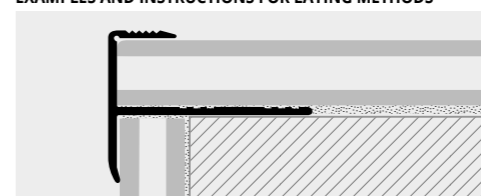

1. Choose "PROSTEP INS" according to the thickness of the tile. 2. Cut "PROSTEP INS" to the desired length. 3. Lay the wood or laminate on the step rise and apply adhesive on the area of the step tread, where the profile will be laid. 4. Lay the profile on the step tread, aligning it with the edge of the rise covering. 5. Lay the wood or laminate on the tread of the step taking care to insert it into the cavity.

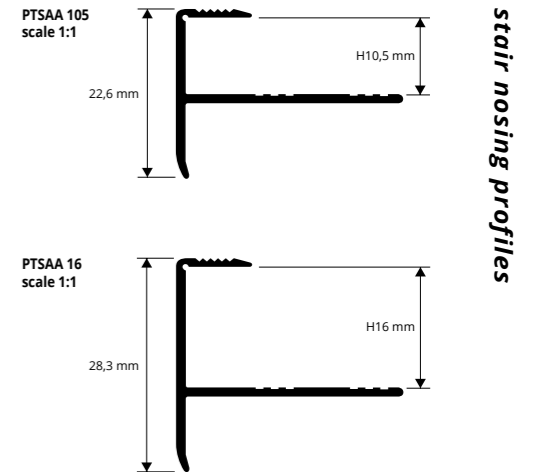

stair nosing profiles


\* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks. Price to agree

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.




# PROSTAIR WOOD

NATURAL OAK  
+ ALUMINIUM BASE

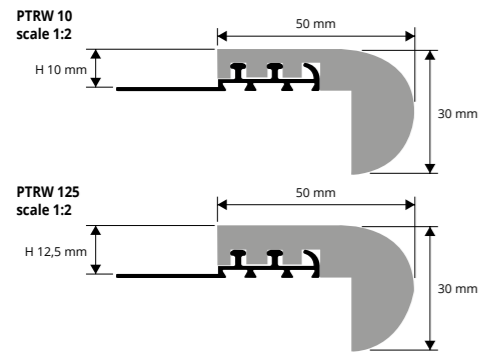

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

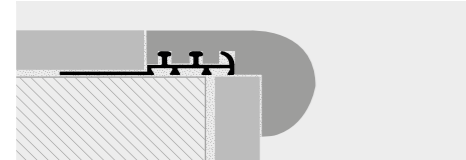

1. Choose the PROSTAIR WOOD with suitable height for the thickness of the covering of the step or staircase. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the step covering, aligning it so that the top edge of the profile is flush with the covering. 5. Fill the profile/covering area of contact with adhesive to prevent any infiltration.

PROSTAIR WOOD is a step nosing profile in real oak with aluminium base. Its rounded "torus/convex" shape makes a perfect and elegant nosing for stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive. PROSTAIR WOOD may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.



NATURAL OAK + ALUMINIUM BASE  
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PTRW 10	10	33,11	89,40 *
PTRW 125	12,5	35,12	94,82 *

H 15 mm on demand

### COLOURS



ITEMS SUPPLIED ALREADY ASSEMBLED  
Treat the wood appropriately with paint or oil.



NATURAL OAK + ALUMINIUM BASE  
bar length 1,20 lm - pack. 10 Pcs - 12 lm


Article	H mm	€/lm	€/Pc
PTRW 1020 (bar length 1,20 lm)	10	48,26	48,26 *
PTRW 12520 (bar length 1,20 lm)	12,5	49,59	49,59 *

NATURAL OAK + ALUMINIUM BASE  
bar length 1,80 lm - pack. 10 Pcs - 18 lm


Article	H mm	€/lm	€/Pc
PTRW 1080 (bar length 1,80 lm)	10	73,48	73,48 *
PTRW 12580 (bar length 1,80 lm)	12,5	74,41	74,41 *

# PROSTAIR WOOD Z

KNURLED NATURAL OAK  
+ ALUMINIUM BASE

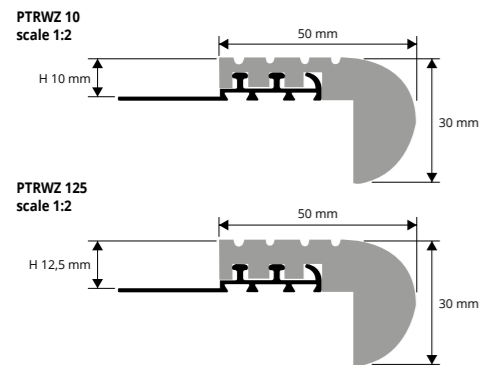

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

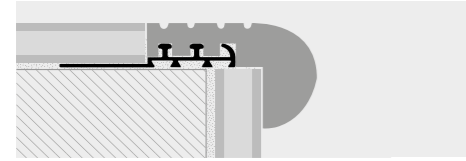

1. Choose the PROSTAIR WOOD Z with suitable height for the thickness of the covering of the step or staircase. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the step covering, aligning it so that the top edge of the profile is flush with the covering. 5. Fill the profile/covering area of contact with adhesive to prevent any infiltration.

PROSTAIR WOOD Z is a step nosing profile in real oak with aluminium base. The rounded shape of the "knurled convex" torus with non-slip surface makes a perfect and elegant nosing for stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive. PROSTAIR WOOD Z may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.




NATURAL OAK + ALUMINIUM BASE  
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PTRWZ 10	10	42,20	113,94 *
PTRWZ 125	12,5	43,37	117,10 *

H 15 mm on demand

### COLOURS



ITEMS SUPPLIED ALREADY ASSEMBLED  
Treat the wood appropriately with paint or oil.



NATURAL OAK + ALUMINIUM BASE  
bar length 1,20 lm - pack. 10 Pcs - 12 lm

Article	H mm	€/lm	€/Pc
PTRWZ 1020 (bar length 1,20 lm)	10	50,63	50,63 *
PTRWZ 12520 (bar length 1,20 lm)	12,5	52,05	52,05 *

NATURAL OAK + ALUMINIUM BASE  
bar length 1,80 lm - pack. 10 Pcs - 18 lm

Article	H mm	€/lm	€/Pc
PTRWZ 1080 (bar length 1,80 lm)	10	75,96	75,96 *
PTRWZ 12580 (bar length 1,80 lm)	12,5	78,07	78,07 *


PROSTEP WOOD is a step nosing profile in real oak with aluminium base. Its 90° shape makes a perfect and elegant nosing for modern stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive. PROSTEP WOOD may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.



NATURAL OAK + ALUMINIUM BASE  
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PTPW 10	10	37,61	101,55 *
PTPW 125	12,5	38,61	104,25 *

### COLOURS



ITEMS SUPPLIED ALREADY ASSEMBLED  
Treat the wood appropriately with paint or oil.



NATURAL OAK + ALUMINIUM BASE  
bar length 1,20 lm - pack. 10 Pcs - 12 lm


Article	H mm	€/lm	€/Pc
PTPW 1020 (bar length 1,20 lm)	10	38,60	38,60 *
PTPW 12520 (bar length 1,20 lm)	12,5	39,97	39,97 *

NATURAL OAK + ALUMINIUM BASE  
bar length 1,80 lm - pack. 10 Pcs - 18 lm


Article	H mm	€/lm	€/Pc
PTPW 1080 (bar length 1,80 lm)	10	57,81	57,81 *
PTPW 12580 (bar length 1,80 lm)	12,5	59,93	59,93 *

# PROSTEP WOOD

NATURAL OAK  
+ ALUMINIUM BASE

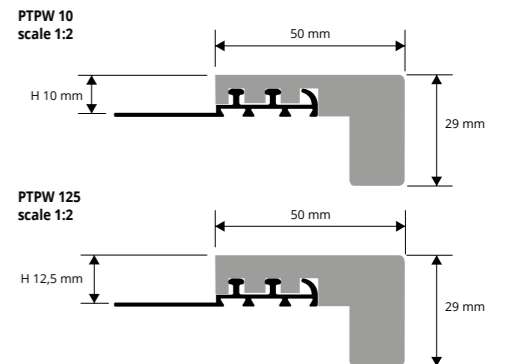

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

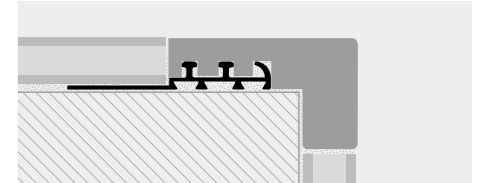

1. Choose the PROSTEP WOOD with suitable height for the thickness of the covering of the step or staircase. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the step covering, aligning it so that the top edge of the profile is flush with the covering. 5. Fill the profile/covering area of contact with adhesive to prevent any infiltration.


PROSTYLE WOOD is a step nosing profile in real oak with aluminium base. Its rounded "torus/fret" shape makes a perfect and elegant nosing for stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive. PROSTYLE WOOD may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.



NATURAL OAK + ALUMINIUM BASE  
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PSYW 10	10	36,49	98,52 *
PSYW 125	12,5	37,55	101,39 *

### COLOURS



ITEMS SUPPLIED ALREADY ASSEMBLED  
Treat the wood appropriately with paint or oil.



NATURAL OAK + ALUMINIUM BASE  
bar length 1,20 lm - pack. 10 Pcs - 12 lm


Article	H mm	€/lm	€/Pc
PSYW 1020 (bar length 1,20 lm)	10	48,26	48,26 *
PSYW 12520 (bar length 1,20 lm)	12,5	49,59	49,59 *

NATURAL OAK + ALUMINIUM BASE  
bar length 1,80 lm - pack. 10 Pcs - 18 lm


Article	H mm	€/lm	€/Pc
PSYW 1080 (bar length 1,80 lm)	10	72,37	72,37 *
PSYW 12580 (bar length 1,80 lm)	12,5	76,68	76,68 *

# PROSTYLE WOOD

NATURAL OAK  
+ ALUMINIUM BASE

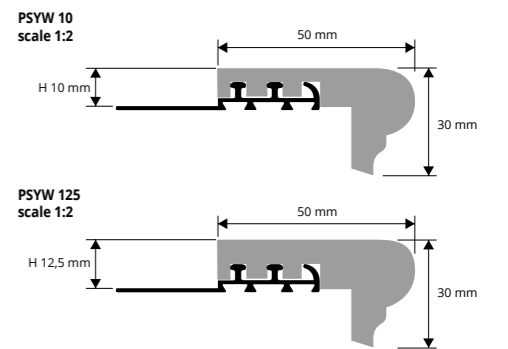

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

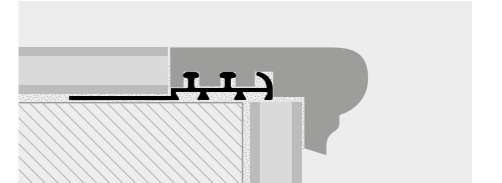

1. Choose the PROSTYLE WOOD with suitable height for the thickness of the covering of the step or staircase. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the step covering, aligning it so that the top edge of the profile is flush with the covering. 5. Fill the profile/covering area of contact with adhesive to prevent any infiltration.



© 2010 All rights reserved by Progress Profiles. Printed in Italy


© 2010 All rights reserved by Progress Profiles. Printed in Italy

**TUBE and ACCESSORIES** for runners and stair-carpet guides, available in the finishes in polished painted brass, polished gold aluminium and polished chrome aluminium.


## TUBES and ACCESSORIES

GOLD AND CHROME POLISHED ALUMINIUM  
POLISHED VARNISHED BRASS



**BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED BRASS COATED**  **SELF PACK**  
length tube **0,8 lm** - pack. **60 Pcs**

Article	Ø mm	€/Pc
TCTOL 118S	11	17,64
TCTOL 138S	13	19,16

**BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED BRASS COATED**  **SELF PACK**  
length tube **0,9 lm** - pack. **60 Pcs**

Article	Ø mm	€/Pc
TCTOL 119S	11	19,29
TCTOL 139S	13	20,93

**BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED BRASS COATED**  **SELF PACK**  
length tube **1 lm** - pack. **60 Pcs**

Article	Ø mm	€/Pc
TCTOL 1110S	11	20,93
TCTOL 1310S	13	22,69



**BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED ALUM.**  **SELF PACK**  
length tube **0,8 lm** - pack. **60 Pcs**

Article	Ø mm	€/Pc
TCTBO 128S (polished gold)	12	12,86
TCTBC 128S (polished chrome)	12	15,09

**BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED ALUM.**  **SELF PACK**  
length tube **0,9 lm** - pack. **60 Pcs**

Article	Ø mm	€/Pc
TCTBO 129S (polished gold)	12	14,01
TCTBC 129S (polished chrome)	12	16,22

**BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED ALUM.**  **SELF PACK**  
length tube **1 lm** - pack. **60 Pcs**

Article	Ø mm	€/Pc
TCTBO 1210S (polished gold)	12	15,13
TCTBC 1210S (polished chrome)	12	17,35

TCTOL 11/13S



TCTBO 12S



TCTBC 12S



Varnished polished brass is not suitable for places subject to heavy foot-traffic and / or abrasion.

COLOURS



tube and accessories for stairs

## TUBE for runners and stair-carpet guides

GOLD AND CHROME POLISHED ALUMINIUM, POLISHED VARNISHED BRASS

**POLISHED BRASS COATED**

bar length **2 / 4 lm** - pack. **40 / 20 Pcs - 80 lm**

Article	Ø mm	€/lm	€/Pc
TGSOL 112 (2 lm)	11	13,92	27,84
TGSOL 114 (4 lm)	11	13,92	55,68
TGSOL 132 (2 lm)	13	16,30	32,60
TGSOL 134 (4 lm)	13	16,30	65,20

**POLISHED ALUMINIUM**

bar length **2 / 4 lm** - pack. **40 / 20 Pcs - 80 lm**

Article	Ø mm	€/lm	€/Pc
TGSBO 122 (2 lm)	12	5,45	10,90
TGSBO 124 (4 lm)	12	5,45	21,80
TGSBC 122 (2 lm)	12	5,45	10,90
TGSBC 124 (4 lm)	12	5,45	21,80

TGSOL 11/13



TGSBO 12



TGSBC 12



## TUBE PLUGS/END CAPS for tube

POLISHED BRASS AND CHROMED BRASS

**POLISHED BRASS AND CHROMED BRASS - pack. 60 Pcs**

Article	Ø mm	€/Pc	€/Pack.
TETOL 11 (polished)	11	0,56	33,60
TETOC 12 (chromed)	12	1,46	87,60
TETOL 12 (polished)	12	0,66	39,60
TETOL 13 (polished)	13	0,76	45,60

TETOL 11  
TETOL 12  
TETOL 13



TETOC 12



## SUPPORT / EYELET for tube with screw

POLISHED BRASS AND CHROMED BRASS

**POLISHED BRASS AND CHROMED BRASS - pack. 20 Pcs**

Article	Ø mm	€/Pc	€/Pack.
SOOL 12 (polished)	12	1,85	37,00
SOOC 12 (chromed)	12	3,12	62,40
SOOL 14 (polished)	14	1,96	39,20

SOOL 12  
SOOL 14



SOOC 12



## HINGE SUPPORT for tube

POLISHED BRASS

**POLISHED BRASS - pack. 20 Pcs**

Article	Ø mm	€/Pc	€/Pack.
SCOL 11	11	6,14	122,80
SCOL 13	13	6,51	130,20

SCOL 11  
SCOL 13




Articles without bar code.  
For bar code add the letter "C" after the article code. E.g.: SCOL 11C and add € 0,40 x Pc (+ 0,20 x lm) to the gross price.  
For cutting to required length 1 lm + 5 % x lm.

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

# PROWALK ACC

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A PUNCHED OR SELF ADHESIVE

**PROWALK ACC** is steps protecting steel profile for existing scales. Its superior side level is crimped in order to increase its adhesion. Available in version with or without adhesive. Available sizes: 30 x 10, 30 x 20, and 30 x 30 mm. All profiles are protected with protective film. It's ideal for the edges protection and screening as well as of the corner between the rising and the tread which is the point of the greatest strain.

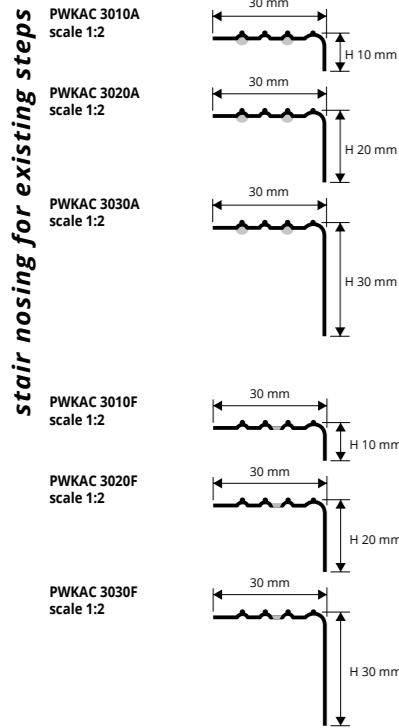

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with adhesive thermo packed - bar length 2,7 lm - pack 20 Pcs - 54 lm - 10/10mm

Article	L x H mm	€/lm	€/Pc
PWKAC 3010A	30 X 10	15,29	41,28
PWKAC 3020A	30 X 20	17,35	46,85
PWKAC 3030A	30 X 30	19,47	52,57

### INSTRUCTIONS FOR LAYING METHODS

#### Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

#### Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A punched - with protective film - bar length 2,7 lm - pack 20 Pcs - 54 lm - 10/10mm

Article	L x H mm	€/lm	€/Pc
PWKAC 3010F	30 X 10	13,70	36,99
PWKAC 3020F	30 X 20	15,76	42,55
PWKAC 3030F	30 X 30	17,88	48,28

### COLOURS

**ON DEMAND HAND-BRUSHED STAINLESS STEEL**  
(price and delivery time to be agreed)


AC - Polished stainless st. AISI 304/1.4301-V2A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

# PROEND

GOLD, SILVER AND BRONZE ANOD. ALUMINIUM WITH/ WITHOUT ADHESIVE AND PUNCHED

**PROEND** is a step nosing profile in anodized aluminium with silver-gold-bronze finish, available with self-adhesive backing or punched. Ideal for protecting existing steps and with knurled flat surface, it guarantees excellent safety features to prevent accidents in public and private environments. **PROEND** ensures a perfect finish, covering laying defects and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the step or using screws and screw anchors in the punched version.

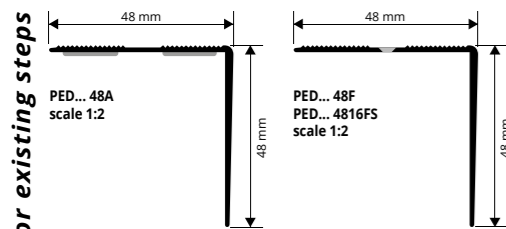

ANOD. ALUMINIUM with and without adhesive thermo packed bar length 3,30 lm - pack 10 Pcs - 33 lm

Article	H x L mm	€/lm	€/Pc
PED... 48A (with adhesive)	48 X 48	9,04	29,83
PED... 48 (without adhesive)	48 X 48	7,77	25,64

### COLOURS

AA - Anodized silver alum. AO - Anodized gold alum. AB - Anodized bronze alum.



ANODIZED ALUMINIUM punched thermo packed bar length 3,30 lm - pack 10 Pcs - 33 lm


Article	H x L mm	€/lm	€/Pc
PED... 48F	48 X 48	7,41	24,45

ANOD. ALU. punched with screws and screw anchors thermo packed - bar length 1,65 lm - pack 20 Pcs

Article	H x L mm	€/lm	€/Pc
PED... 4816FS	48 X 48		15,12

Available in the colours: AA - AO - AB. The code of the selected colour must be added to the article code. E.g.: PED... 48A (chosen colour anodized gold) PEDAO 48A.

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

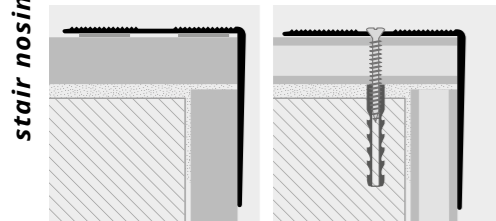

- Adhesive version**
1. Choose the suitable profile and cut it to the necessary length.
  2. Degrease, wash and clean the solid surface thoroughly.
  3. Remove the protective paper from the adhesive.
  4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.
- Punched version**
1. Choose the suitable profile and cut it to the necessary length.
  2. Mark the position of the holes using the existing holes in the profile as reference.
  3. Insert the screw anchors into the drilled holes.
  4. Fix the profile using flathead screws suitable for the relative slots in the profile.

**PROWALK** is a step nosing profile in polished brass and anodized aluminium for existing steps. The upper part is knurled to increase slip and slide resistance and is applied after laying. Available with holes or without adhesive. Available in the widths 22 x 22 and 30 x 30 mm. All the profiles are shrink-wrapped. Ideal for protecting and shielding the edges and corner between riser and tread, which are the areas subjected to most stress.

# PROWALK

POLISHED BRASS and ANODIZED ALUMINIUM ADHESIVE and PUNCHED



KNURLED POLISHED BRASS with adhesive thermo packed bar length 2,7 lm - pack 15 Pcs - 40,5 lm

Article	H x L mm	€/lm	€/Pc
PWKOL 22A	22 X 22	19,15	51,71
PWKOL 30A	30 X 30	24,65	66,56 *



KNURLED POLISHED BRASS punched thermo packed bar length 2,7 lm - pack 15 Pcs - 40,5 lm

Article	H x L mm	€/lm	€/Pc
PWKOL 22F	22 X 22	17,03	45,98
PWKOL 30F	30 X 30	22,54	60,86 *

KNURLED POLISHED BRASS without holes thermo packed bar length 2,7 lm - pack 15 Pcs - 40,5 lm

Article	H x L mm	€/lm	€/Pc
PWKOL 22	22 X 22	16,82	45,41 *
PWKOL 30	30 X 30	22,10	59,67 *

KNURLED POLI. BRASS punched with screws and screw anchors thermo packed - bar length 0,90 lm - pack 20 Pcs

Article	H x L mm	€/lm	€/Pc
PWKOL 309AS	30 X 30		19,99

KNURLED POLISHED BRASS with adhesive thermo packed - bar length 0,90 lm - pack 20 Pcs

Article	H x L mm	€/lm	€/Pc
PWKOL 229AS	22 X 22		16,92
PWKOL 309AS	30 X 30		24,70 *

### COLOURS

OL - Polished brass

KNURLED ANODIZED ALUMINIUM with adhesive thermo packed bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PWK... 22A	22 X 22	6,60	17,82
PWK... 30A	30 X 30	9,56	25,81

KNURLED ANODIZED ALUMINIUM punched thermo packed bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PWK... 22F	22 X 22	4,97	13,42
PWK... 30F	30 X 30	7,23	19,52

KNURLED ANODIZED ALUM. WITHOUT HOLES thermo packed bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PWK... 22	22 X 22	4,81	12,99
PWK... 30	30 X 30	6,98	18,85

KNURLED ANOD. ALU. punched with screws and screw anchors thermo packed - bar length 0,90 lm - pack 20 Pcs

Article	H x L mm	€/lm	€/Pc
PWK... 229FS	22 X 22		5,86
PWK... 309FS	30 X 30		7,98 *

KNURLED ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,90 lm - pack 20 Pcs


Article	H x L mm	€/lm	€/Pc
PWK... 229AS	22 X 22		7,18
PWK... 309AS	30 X 30		9,80 *

### COLOURS


AO - Anodized gold alum. AA - Anodized silver alum. AB - Anodized bronze alum.

### ON DEMAND MINIMUM QUANTITY 100 PCS for color and height

AT - Anodized titanium alum. CH - Anod. champagne alum. SB - Anodized sand aluminium

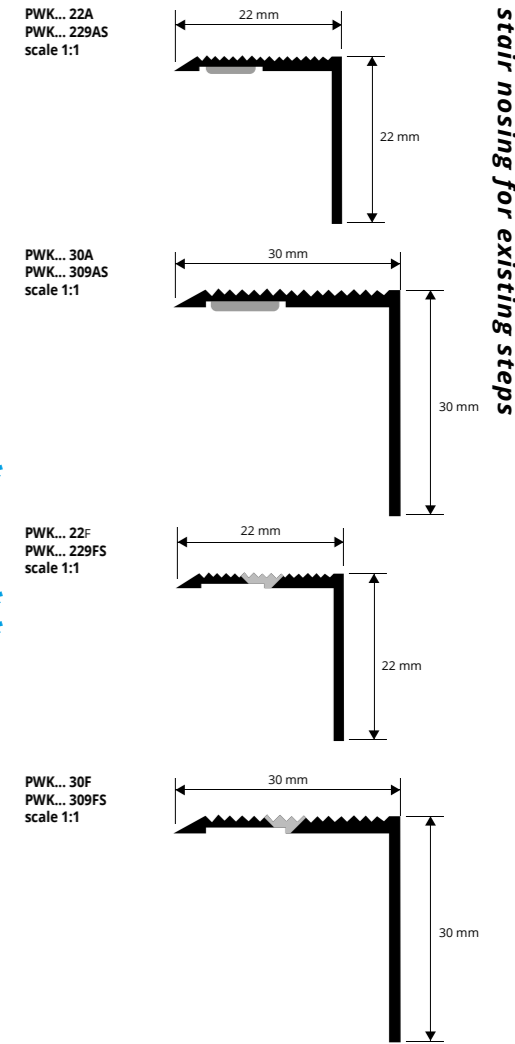

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

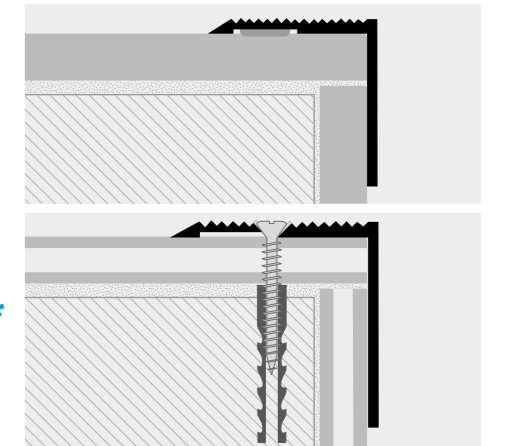


- Adhesive version**
1. Choose the suitable profile and cut it to the necessary length.
  2. Degrease, wash and clean the solid surface thoroughly.
  3. Remove the protective paper from the adhesive.
  4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.
- Punched version**
1. Choose the suitable profile and cut it to the necessary length.
  2. Mark the position of the holes using the existing holes in the profile as reference.
  3. Insert the screw anchors into the drilled holes.
  4. Fix the profile using flathead screws suitable for the relative slots in the profile.


# PROWALK 2510 PROWALK 2520

ALUMINIUM 30 WOOD FINISHES AND 6 ANODIZED FINISHES PUNCHED OR SELF ADHESIVE

PROWALK 2510 e 2520 are new stair-nosing profiles for existing stairways. Designed to protect and restore stair steps made of wood, laminate, ceramic, etc. Made with anodized aluminium with silver, gold and bronze finish and available in self-adhesive or perforated versions. Sizes available: 2.7 m lengths and 0.9 m & 1.35 m Self-Pack.

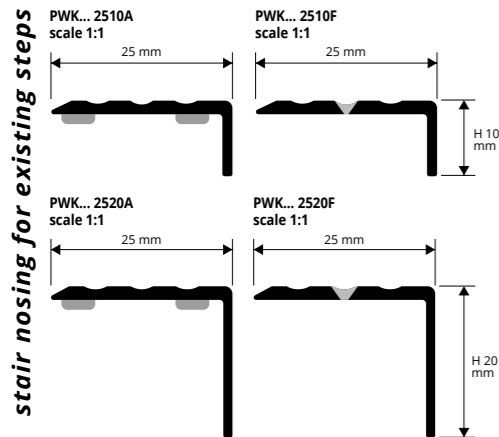

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

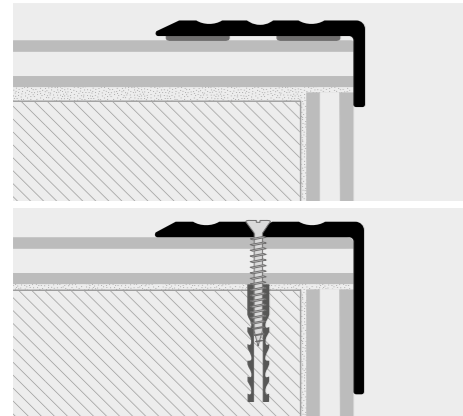

**Adhesive version**  
1. Choose the suitable profile and cut it to the necessary length.  
2. Degrease, wash and clean the solid surface thoroughly.  
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.  
**Punched version**  
1. Choose the suitable profile and cut it to the necessary length.  
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

### COLOURS

04W - Dark beech	05W - Light oak (strip)	06W - Dark oak (walnut)	07W - Light cherry (strip)	08W - Dark cherry (board)	09W - Red walnut (merbau-apple-walnut)
10W - Wengé (panga panga-wengé)	11W - Bleached decapè	13W - Indonesian teak	18W - Light zebrano	21W - Powder oak	25W - Bleached fir
28W - Aspen oak	29W - White oak	30W - Grey oak	31W - Victoria oak	32W - Pink oak	33W - Sawed oak
34W - Havana oak	35W - Edimburgo oak	36W - American oak	37W - Carvi oak	38W - Queens oak	39W - Grey elm
40W - Brown oak	41W - Ice oak	42W - Grace oak	43W - Manhattan oak	44W - Honey oak	45W - Morocco oak

(For a precise assessment of colours request the wood finishes sample range)

On demand it is possible to produce samples of wood finishes. Contact the office for negotiation, small amounts, timing and costs.



**ANODIZED ALUMINIUM with adhesive thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PWK... 2510A	25 X 10	4,92	13,28
PWK... 2520A	25 X 20	5,40	14,58

**ANODIZED ALUMINIUM with adhesive thermo packed** - bar length 0,90 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PWK... 25109AS	25 X 10	5,15	

Available in the finishes: AO - AA - AB (AT, CH e SB on demand with a minimum order of 100 pcs). The code of the selected finish must be added to the article code. E.g.:PWK... 2510A (chosen finish anodized silver) PWKAA 2510A.

**ALUMINIUM 30 WOODEN FINISHES with adhesive thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PWK... 2510A	25 X 10	8,19	22,11 *
PWK... 2520A	25 X 20	9,84	26,57 *

Available on demand in the finishes: 04W - 05W - 06W - 07W - 08W - 09W - 10W - 11W - 13W - 18W - 21W - 25W - 28W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 40W - 41W - 42W - 43W - 44W - 45W with a minimum order of 100 pcs. The code of the selected finish must be added to the article code. E.g.: PWK... 2510A (chosen finish dark beech) PWK04 2510A.



**ANODIZED ALUMINIUM punched thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PWK... 2510F	25 X 10	3,70	9,99
PWK... 2520F	25 X 20	4,24	11,45

**ANODIZED ALUM. punched, screws and screw anchors thermo packed** - bar length 0,90 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PWK... 25109FS	25 X 10	4,44	

**ANODIZED ALUM. punched, screws and screw anchors thermo packed** - bar length 1,35 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PWK... 251013FS	25 X 10	6,45	

### COLOURS

ANODIZED		
AO - Anodized gold alum.	AA - Anodized silver alum.	AB - Anodized bronze alum.

### ON DEMAND MINIMUM QUANTITY 100 PCS for color and height

ANODIZED		
AT - Anodized titanium alum.	CH - Anod. champagne alum.	SB - Anodized sand aluminium.

© 2019 All rights reserved by Progress Profiles. Printed in Italy

© 2019 All rights reserved by Progress Profiles. Printed in Italy

**PROEND INS 75** is a step nosing profile in anodized aluminium with interchangeable rubber insert: the upper part is knurled to increase slip and slide resistance and is applied after laying. Available anodized with gold, bronze or silver finish and with adhesive or punched.  
**PROEND INS 75** ensures a perfect finish, covering laying defects and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the step or with screws and screw anchors in the punched version.

# PROEND INS 75

GOLD, SILVER AND BRONZE ANOD. ALUMINIUM ADHESIVE AND PUNCHED



**ANODIZED ALUMINIUM with DOUBLE INSERT thermo packed - with adhesive**  
bar length 3,30 lm - pack. 10 Pcs - 33 lm

Article	H x L mm	€/lm	€/Pc
PED... 7537A	37 X 75,5	21,29	70,26

**ANODIZED ALUMINIUM with DOUBLE INSERT thermo packed - punched**  
bar length 3,30 lm - pack. 10 Pcs - 33 lm

Article	H x L mm	€/lm	€/Pc
PED... 7537F	37 X 75,5	18,20	60,06



Available in the finishes: AA - AO - AB.  
The code of the selected finish must be added to the article code. E.g.:PED... 7537A (chosen finish anodized gold) PEDAO 7537A.

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

**Adhesive version**  
1. Choose the suitable profile and cut it to the necessary length.  
2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.  
**Punched version**  
1. Choose the suitable profile and cut it to the necessary length.  
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

### COLOURS

AA - Anodized silver alum.	AO - Anodized gold alum.	AB - Anodized bronze alum.

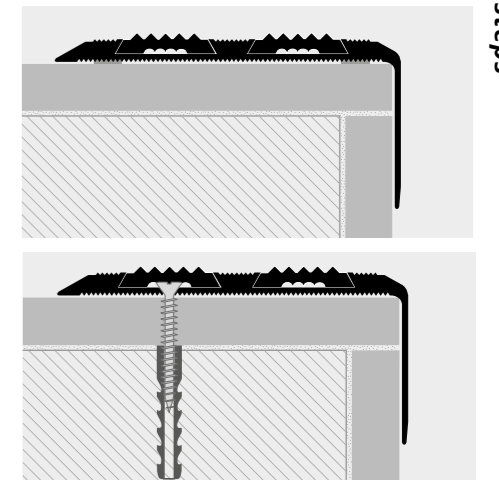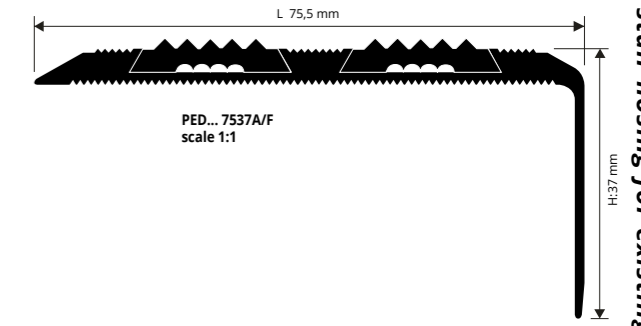

**PROEND INS** is a step nosing profile in anodized aluminium with interchangeable rubber insert: the upper part is knurled to increase slip and slide resistance and is applied after laying. Available anodized with gold, bronze or silver finish and with adhesive or punched.  
**PROEND INS** ensures a perfect finish, covering laying defects and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the step or with screws and screw anchors in the punched version.

# PROEND INS

GOLD, SILVER AND BRONZE ANOD. ALUMINIUM ADHESIVE AND PUNCHED



**ANODIZED ALUM. with adhesive WITH INSERT thermo packed**  
bar length 3,30 lm - pack. 20 Pcs - 66 lm

Article	H x L mm	€/lm	€/Pc
PED... 4528A	28 X 45	13,49	44,52

**AN. ALUM. punched WITH INSERT, screws and screw anchors thermo packed** - bar length 1,65 lm - pack. 20 Pcs

Article	H x L mm	€/lm	€/Pc
PED... 452816FS	28 X 45	24,50	

Available in the finishes: AA - AO - AB.  
The code of the selected colour must be added to the article code. E.g.: PED... 4528A (chosen finish anodized gold) PEDAO 4528A.




**ANODIZED ALUM. punched WITH INSERT thermo packed**  
bar length 3,30 lm - pack. 20 Pcs - 66 lm


Article	H x L mm	€/lm	€/Pc
PED... 4528F	28 X 45	9,73	32,11

### COLOURS

AA - Anodized silver alum.	AO - Anodized gold alum.	AB - Anodized bronze alum.

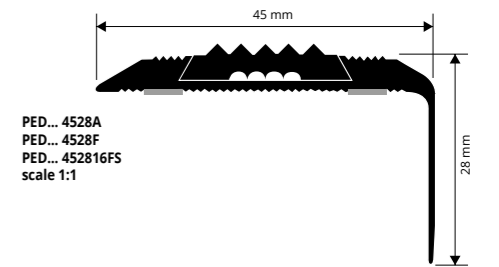

### EXAMPLES OF LAYING

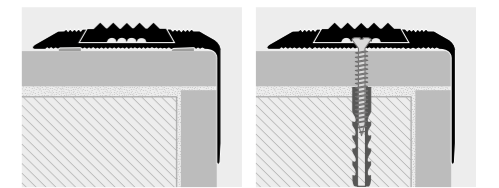



For instructions see the product above

# BLACK INTERCHANGEABLE INSERT

VINYL RESIN / RUBBER

**VINYL RESIN / RUBBER**  
bar length 3,30 lm - pack. 20 Pcs - 66 lm

Article	€/lm	€/Pc
IIN 12	1,74	5,74



\* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks. Price to agree

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


\* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks. Price to agree

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


# PROEND GRIP 70

SILVER, GOLD AND BRONZE ANOD. ALUMINIUM + NON-SLIP INSERT ADHESIVE AND PUNCHED

PROEND GRIP 70 is a non-slip step nosing profile in anodized aluminium with adhesive non-slip 50mm thick insert in black carborundum to be fitted in the relative groove in the top of the profile upon completion of laying. The profile may be laid with fixing screws hidden afterwards by the adhesive carborundum, or with silicone and/or adhesive to be applied on the bottom of the profile, which is designed to ensure an excellent grip. It is made in anodized aluminium with silver, gold or bronze finish with anodizing coat of approx. 15/20 micron.

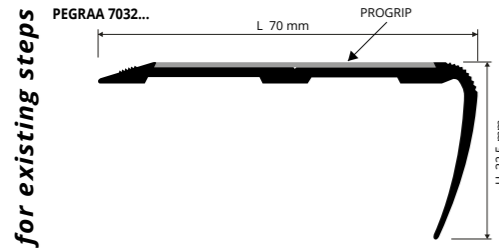

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

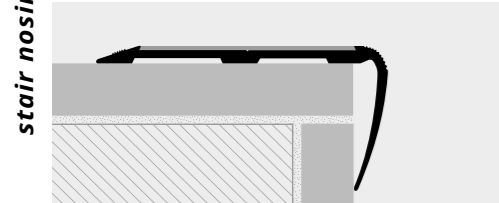

#### Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

#### Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.



SILVER, GOLD AND BRONZE ANODIZED ALUM. with adhesive thermo packed - bar length 3,4 lm - pack. 20 Pcs - 68 lm

Article	H x L mm	€/lm	€/Pc
PEGR... 7032A	32,5 X 70	15,15	51,51


SILVER, GOLD AND BRONZE ANODIZED ALUM. punched thermo packed - bar length 3,4 lm - pack. 20 Pcs - 68 lm

Article	H x L mm	€/lm	€/Pc
PEGR... 7032F	32,5 X 70	12,40	42,16

Available in the finishes: AA - AO - AB.  
The code of the selected finish must be added to the article code.  
E.g.: PEGR... 7032A (chosen finish anodized gold) PEGRAO. 7032A.



#### COLOURS




The adhesive carborundum strip (PROGRIP) is not included with the profile.  
For PEGR... 7032... order PGR... 50 (Specify the chosen colour).

# PROEND 5050


ANODIZED SILVER ALUMINIUM + NON-SLIP INSERT ADHESIVE AND PUNCHED

PROEND 5050 is a non-slip profile for stairs in anodized silver aluminium, with a visible surface of 50x50 mm. The profile, available in the adhesive or punched version, is characterized of a horizontal surface partially milled, equipped with a specific groove where the non-slip adhesive Progrid in carborundum could be applied. The profile has also a vertical inclined of 83-degrees surface completely smooth. The ease of application and the availability of the carborundum in different colours, make it a much-sought profile.

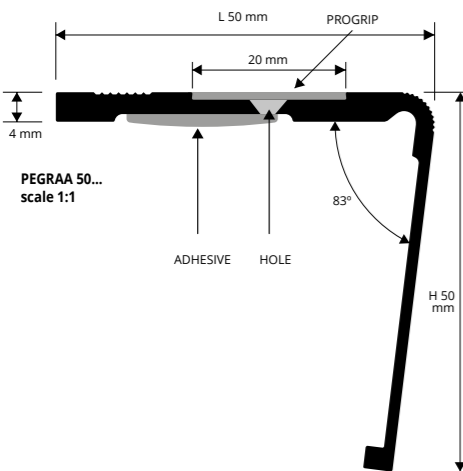

ANODIZED SILVER ALUMINIUM punched / with adhesive bar length 3,4 lm - pack. 20 Pcs - 68 lm

Article	HxL mm	€/lm	€/Pc
PEGRAA 50F	50 X 50	10,61	36,07 *
PEGRAA 50A	50 X 50	12,67	43,08 *

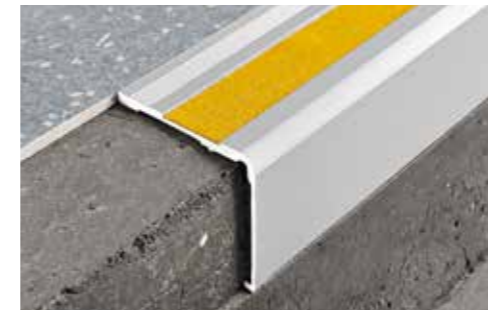

#### COLOURS



The adhesive carborundum strip (PROGRIP) is not included with the profile.  
For PEGRAA 50... order PGR... 20 (Specify the chosen colour).

#### LAYING INSTRUCTIONS


##### Adhesive version

1. Cut PROEND 5050 to the desired length;
2. Remove all the remains of oil, grease and dirt from the surface where the profile will be laid;
3. When the surface is perfectly dry, remove the protective film and press the profile exerting the appropriate pressure;
4. Apply the non-slip strip in carborundum in the desired colour.

##### Punched version

1. Cut PROEND 5050 to the correct size;
2. Mark on the support the position of the holes present on the profile;
3. Drill holes in the bracket with a 5 mm diameter bit and insert the 5 x 25 mm rawplugs;
4. Align the profiles over the holes and screw it to support;
5. Apply the non-slip carborundum adhesive insert in the desired color.

#### EXAMPLES OF LAYING

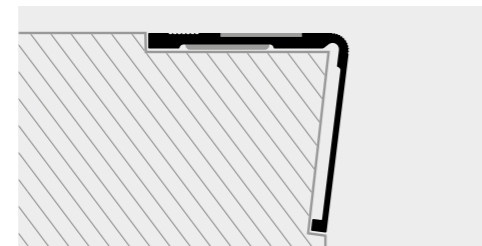

\* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks. Price to agree

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

# PROEND GRIP

SILVER, GOLD AND BRONZE ANOD. ALUMINIUM + NON-SLIP INSERT ADHESIVE AND PUNCHED

PROEND GRIP is a non-slip step nosing profile in anodized aluminium with adhesive non-slip 20mm thick insert in black carborundum to be fitted in the relative groove in the top of the profile upon completion of laying. The profile may be laid with fixing screws hidden afterwards by the adhesive carborundum, or with silicone and/or adhesive to be applied on the bottom of the profile, which is designed to ensure an excellent grip. It is made in anodized aluminium with silver, gold or bronze finish with anodizing coat of approx. 15/20 micron.



ANODIZED SILVER, GOLD AND BRONZE ALUM. with adhesive thermo packed - bar length 3,4 lm - pack. 20 Pcs - 68 lm

Article	H x L mm	€/lm	€/Pc
PEGR... 5230A	30 X 52	12,78	43,45


ANODIZED SILVER, GOLD AND BRONZE ALUM. with adhesive - thermo packed bar length 1,66 lm - pack. 20 Pcs

Article	H x L mm	€/lm	€/Pc
PEGR... 523016AS	30 X 52	25,29 *	

Available in the finishes: AA - AO - AB.  
The code of the selected finish must be added to the article code. E.g.: PEGR... 523016AS (chosen finish anodized silver) PEGRAA 523016AS.

The adhesive carborundum strip (PROGRIP) is not included with the profile.  
For PEGR... 5230... order PGR... 20 (Specify the chosen colour).

#### COLOURS



= Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks. Price to agree

\* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks. Price to agree

PROGRIP is a self-adhesive product in carborundum consisting of a plastic film plus abrasive granules with high resistance to wear. It is normally used to guarantee safety on steps in public and private environments, as required by accident-prevention laws. Available in various colours and widths to meet all technical and aesthetic requirements. It is advisable to apply 2 strips on each step, rounding off the ends.




#### ADHESIVE CARBORUNDUM NON-SLIP STRIP FOR STEPS

rolls length 18,2 lm

Article	Width mm	€/lm	€/Roll
PGRN 20 (black)	20	1,59	28,94
PGRB 20 (white)	20	2,81	51,14 *
PGRN 20 (transparent)	20	1,59	28,94
PGRG 20 (grey)	20	3,16	57,51
PGRY 20 (yellow)	20	3,16	57,51
PGRM 20 (brown)	20	1,83	33,31
PGRN 25 (black)	25	2,11	38,40
PGRB 25 (white)	25	3,17	57,69 *
PGRN 25 (transparent)	25	2,11	38,40
PGRG 25 (grey)	25	3,59	65,34
PGRY 25 (yellow)	25	3,49	63,52
PGRM 25 (brown)	25	2,43	44,23
PGRN 50 (black)	50	4,34	78,99
PGRB 50 (white)	50	6,45	117,39 *
PGRN 50 (transparent)	50	4,34	78,99
PGRG 50 (grey)	50	7,14	129,95
PGRY 50 (yellow)	50	7,09	129,04
PGRM 50 (brown)	50	4,81	87,54

#### COLOURS

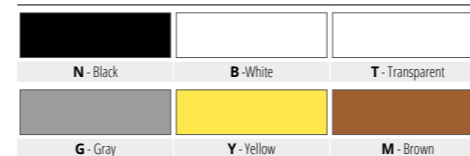


#### LAYING INSTRUCTIONS


1. Thoroughly clean and degrease the surface of application.
2. Round the ends of the strips.
3. Remove the protective paper from the adhesive and lay the PROGRIP using a roller.
4. Do not apply the strips at temperatures below 15°, otherwise heat the strips and the step.
5. When necessary clean away impurities with a brush and preserve the PROGRIP.
6. When laying on tiles, cut and round the corners of the strips on the inner part of the tile.
7. Carefully seal the outer edges of the strips to prevent water infiltration.

\* = Production on demand with minimum quantity of 10 rolls. Delivery time 4/5 weeks. Price to agree

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

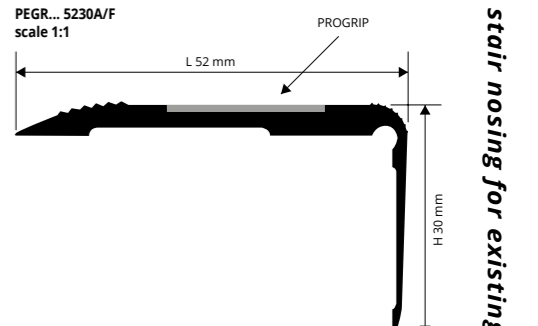

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

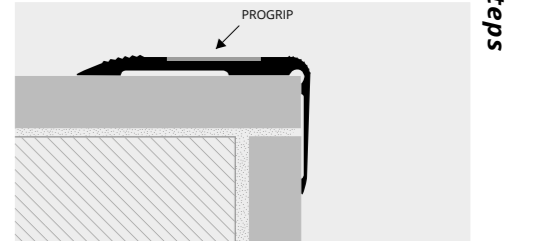

1. Choose the suitable profile for covering the edge of the step.
  2. Clean the surface on which the profile is to be laid, ensuring that it is grease-free and dry. Do not apply the strips at temperatures below 15°.
  3. Remove the protective paper from the adhesive and lay correctly by applying pressure evenly over the whole profile without using a hammer.
- If the punched PROEND GRIP has been chosen, screw the profile to the step and apply the adhesive carborundum to hide the screws.

# PROGRIP

ADHESIVE CARBORUNDUM - 6 COLOURS



#### EXAMPLES OF LAYING

