



LOW THICKNESS

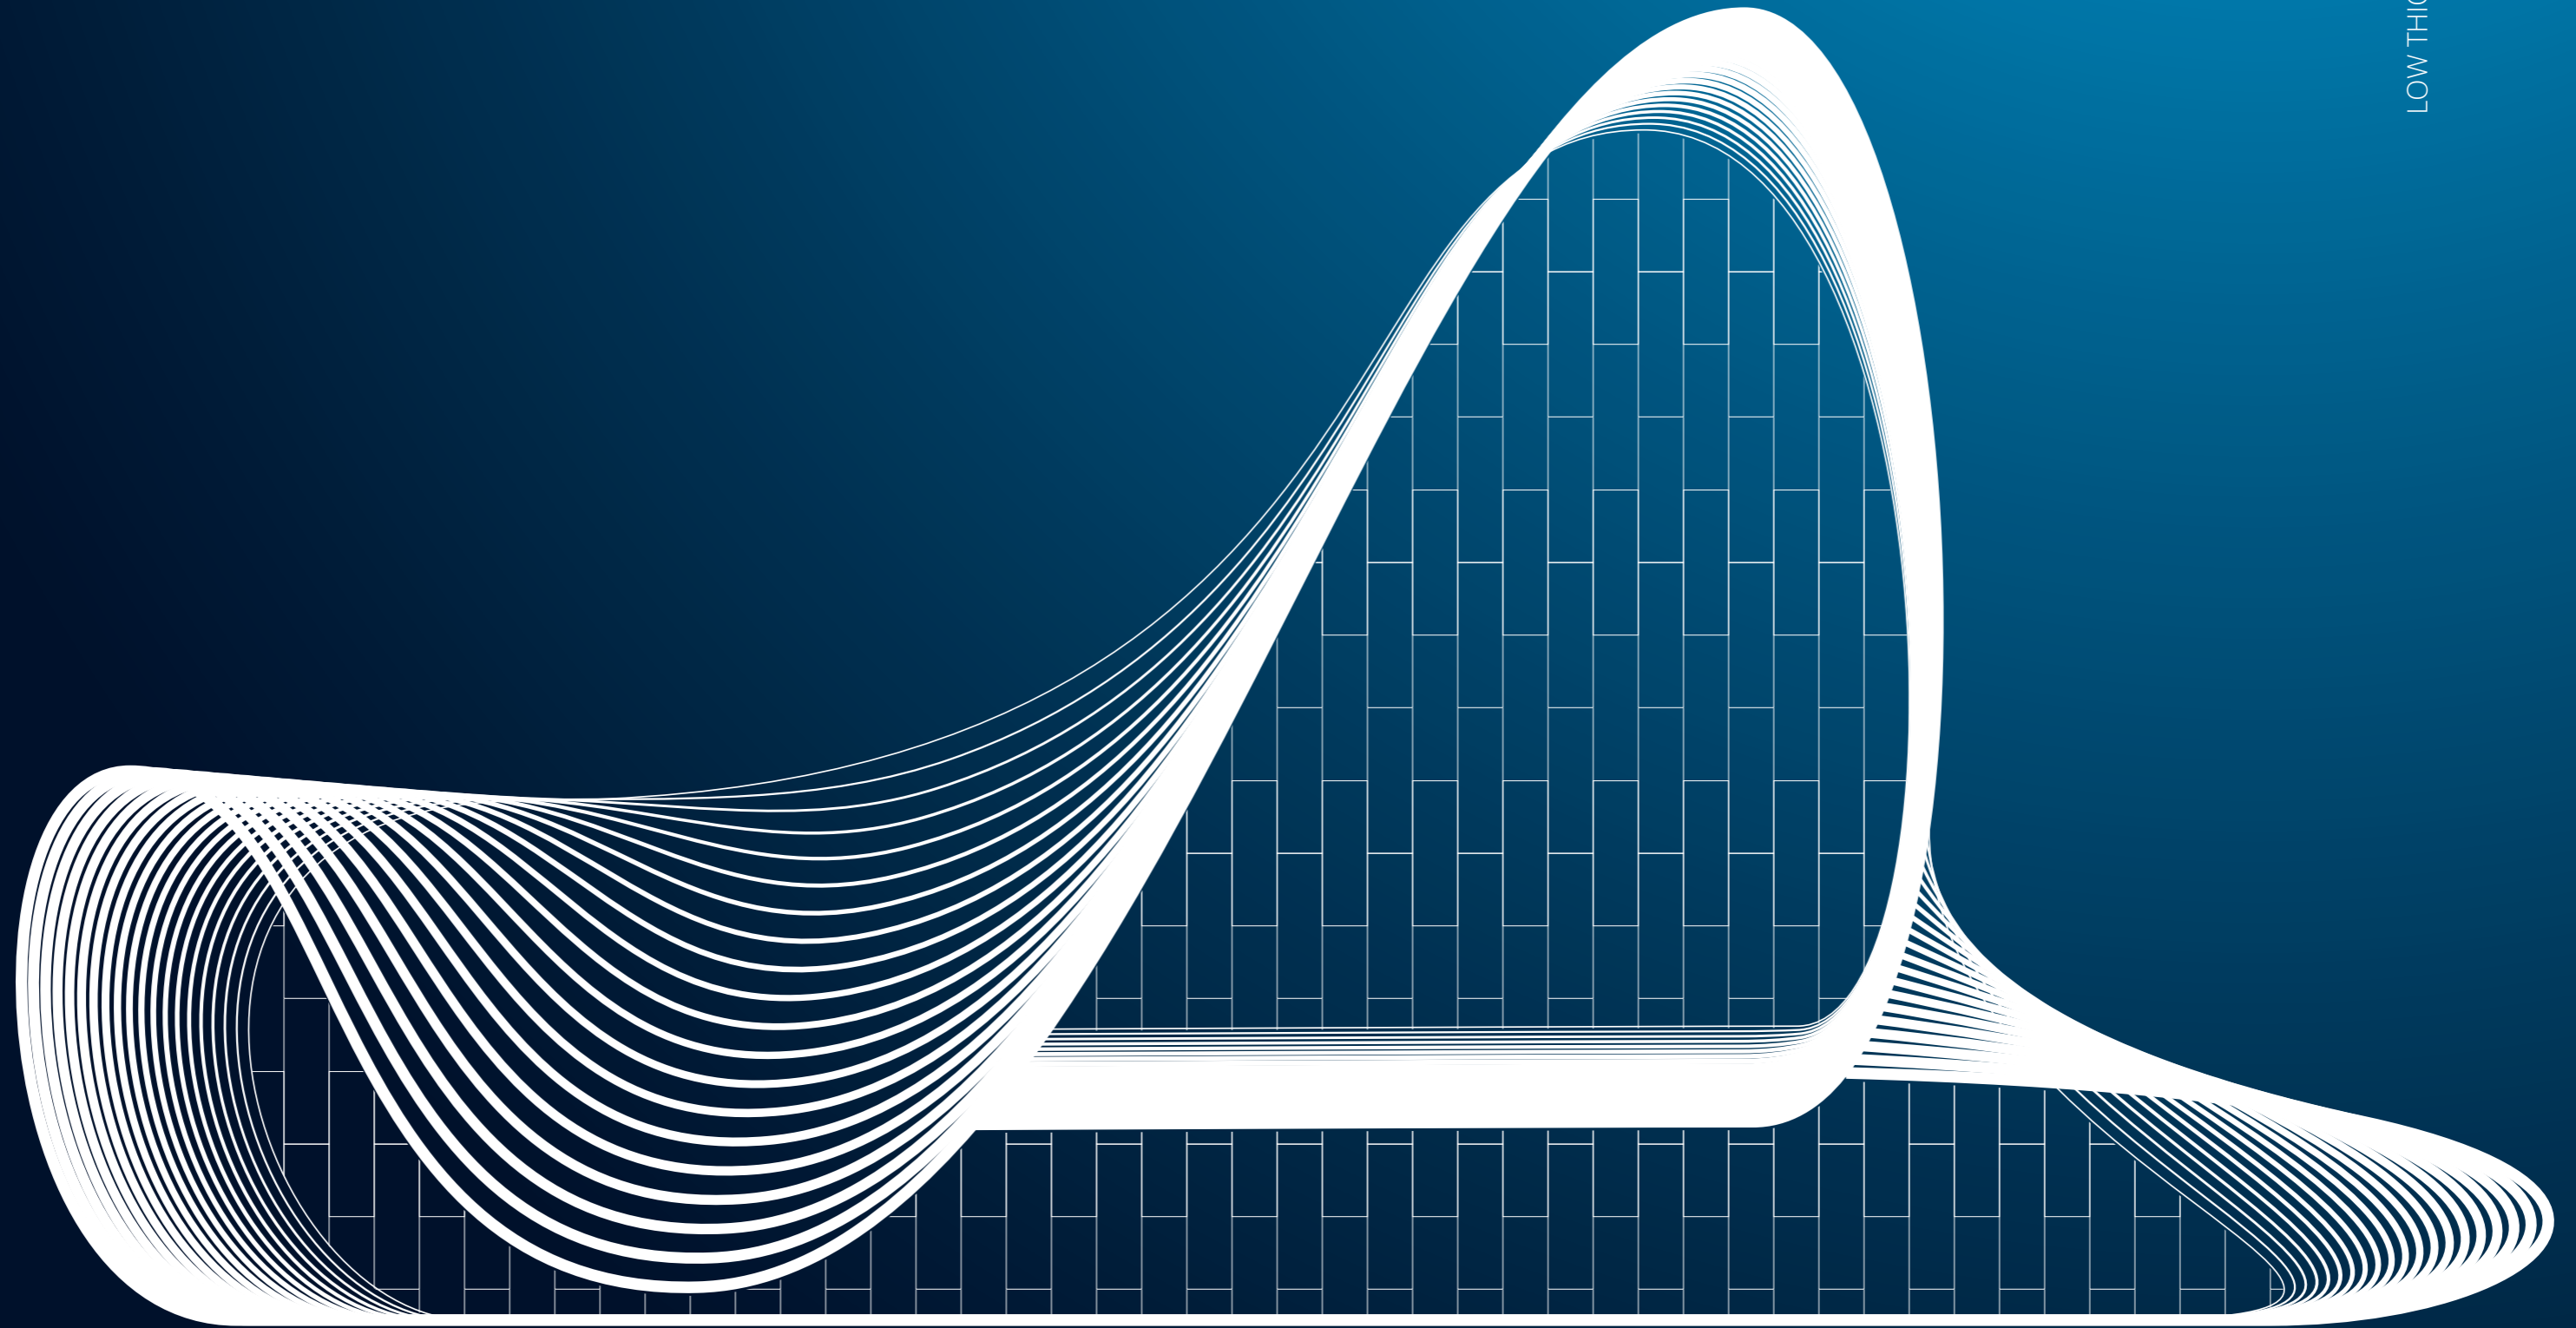

## PROKERLAM SQUARE

ANODIZED AND POLISHED ALUMINIUM SILVER, CHROME AND GOLD

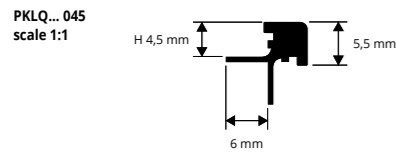

**PROKERLAM SQUARE** is a square corner bead profile in anodized and polished aluminium suitable to protect the external corners of coverings with low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different finishes make **PROKERLAM SQUARE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

**ANODIZED SILVER ALUMINIUM thermo packed**

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLQAA 045	4,5	5,40	14,58

**POLISHED CHROME/GOLD ALUMINIUM thermo packed**

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLQBC 045	4,5	8,35	22,55
PKLQBO 045	4,5	8,35	22,55




COLOURS




1. Choose "PROKERLAM SQUARE" according to the desired finish.
2. Cut "PROKERLAM SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROKERLAM SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

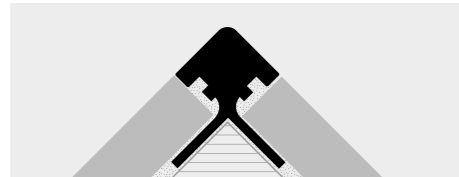

## PROKERLAM JOLLY

ANODIZED AND POLISHED ALUMINIUM SILVER, CHROME AND GOLD

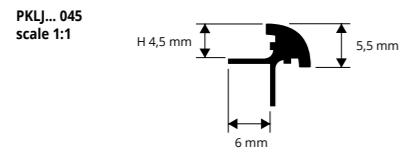

**ANODIZED SILVER ALUMINIUM thermo packed**

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLJAA 045	4,5	5,23	14,12

**POLISHED CHROME/GOLD ALUMINIUM thermo packed**

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLJBC 045	4,5	8,15	22,01
PKLJBO 045	4,5	8,15	22,01




COLOURS




**PROKERLAM JOLLY** is a quarter-circle rounded bead profile in anodized and polished aluminium suitable to protect the external corners of coverings with low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different finishes make **PROKERLAM JOLLY** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

EXAMPLES FOR LAYING

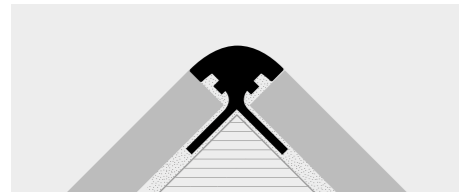

## PROKERLAM LINE

ANODIZED AND POLISHED ALUMINIUM SILVER, CHROME AND GOLD

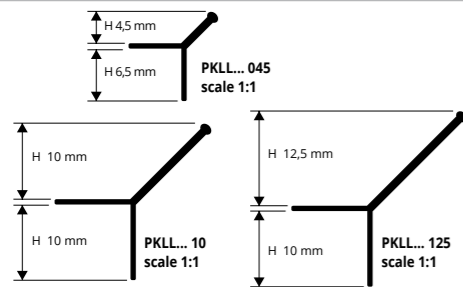

**ANODIZED SILVER ALUMINIUM thermo packed**

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLLAA 045	4,5	4,23	11,42
PKLLAA 10	10	5,12	13,82
PKLLAA 125	12,5	5,56	15,01

**POLISHED CHROME/GOLD ALUMINIUM thermo packed**

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLLBO 045	4,5	7,09	19,14
PKLLBC 045	4,5	7,09	19,14
PKLLBC 10	10	8,76	23,65
PKLLBC 125	12,5	9,37	25,30



COLOURS



\* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

**PROSHELL D ALL** is a profile in anodized and polished aluminum with a visible 45° sloping surface. The profile allows to connect the floor and wall coverings in ceramic and mosaic with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in three different finishes, make **PROSHELL D ALL** a much sought after profile.

## PROSHELL D ALL

ANODIZED AND POLISHED ALUMINIUM SILVER, CHROME AND GOLD



**ANODIZED SILVER ALUMINIUM thermo packed**

bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm	€/lm	€/Pc
PSHDA 045	4,5	6,56	17,71




**POLISHED CHROME/GOLD ALUMINIUM thermo packed**

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PSHDBC 045	4,5	8,35	22,55
PSHDBO 045	4,5	8,35	22,55

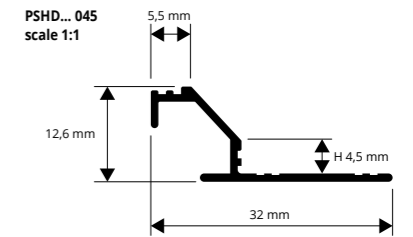

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

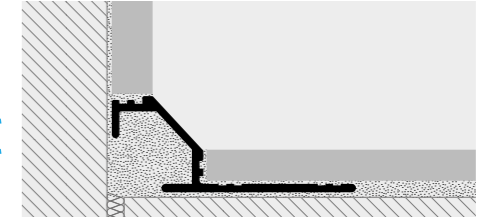

1. Choose "PROSHELL D ALL" according to the desired finish.
2. Cut "PROSHELL D ALL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROSHELL D ALL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



**PROSHELL R ALL** is a cove-shaped profile in anodized and polished aluminum. The profile allows to connect the floor and wall coverings in ceramic and mosaic with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in three different finishes, make **PROSHELL R ALL** a much sought after profile.

## PROSHELL R ALL

ANODIZED AND POLISHED ALUMINIUM SILVER, CHROME AND GOLD



**ANODIZED SILVER ALUMINIUM thermo packed**


bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PSHRA 045	4,5	6,56	17,71


**POLISHED CHROME/GOLD ALUMINIUM thermo packed**

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PSHRBC 045	4,5	8,35	22,55
PSHRBO 045	4,5	8,35	22,55

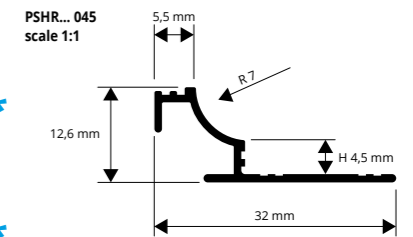

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

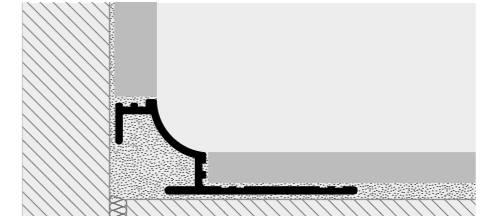

1. Choose "PROSHELL R ALL" according to the desired finish.
2. Cut "PROSHELL R ALL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROSHELL R ALL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS




\* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree


Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

# PROINTER KL ACC

STAINLESS STEEL AISI 304/1.4301-V2A

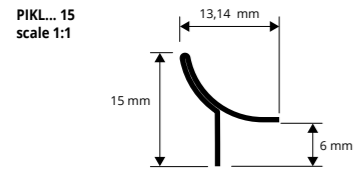

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

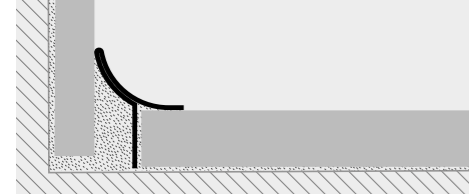

1. Choose "PROINTER KL ACC" according to the desired finish. 2. Cut "PROINTER KL ACC" to the desired length. 3. Apply the silicone along the floor-wall connection. 4. Press the arrowhead of "PROINTER KL ACC" into the silicone evenly until it is completely adherent to the floor and wall.

**PROINTER KL ACC** is a cove-shaped profile in stainless steel AISI 304/1.4301-V2A. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section makes **PROSHELL KL ALL** a much sought after profile.



**POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm	€/lm	€/Pc
PIKLAC 15	15	10,45	28,22

**SATINED STAINLESS ST. AISI 304/1.4301-V2A with protective film**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm	€/lm	€/Pc
PIKLACS 15	15	13,20	35,64

### COLOURS



**SANDED STAINLESS ST. AISI 304/1.4301-V2A with protective film**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm	€/lm	€/Pc
PIKLACSB 15	15	14,30	38,61

**SUPER POLISHED ST. AISI 304/1.4301-V2A with protective film**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm


Article	H mm	€/lm	€/Pc
PIKLACML 15	15	13,70	36,99

### AVAILABLE MINIMUM QUANTITY 100 PCS




# PROINTER KL ALL

POLISHED AND CHROMED BRASS AND ANODIZED AND POLISHED ALUMINIUM

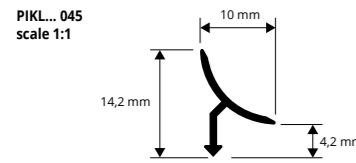

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

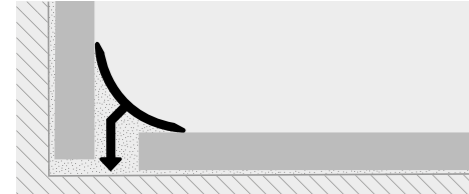

1. Choose "PROINTER KL ALL" according to the desired finish. 2. Cut "PROINTER KL ALL" to the desired length. 3. Apply the silicone along the floor-wall connection. 4. Press the arrowhead of "PROINTER KL ALL" into the silicone evenly until it is completely adherent to the floor and wall.

**PROSHELL KL ALL** is a cove-shaped profile in polished and chromed brass and anodized and polished aluminium. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in five different finishes, make **PROSHELL KL ALL** a much sought after profile.



**POLISHED / CHROMED BRASS thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PIKL0L 045 (polished)	4,5	11,47	30,97
PIKLOC 045 (chromed)	4,5	17,93	48,41

### CAPS - VARNISHED PLASTIC

Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TPIKL ...	2,58	12,88



### COLOURS



**POLISHED CHROME ALUMINIUM / GOLD thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PIKLBC 045	4,5	6,66	17,98
PIKLBO 045	4,5	6,66	17,98

**ANODIZED SILVER ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PIKLAA 045	4,5	4,66	12,58

### CAPS - VARNISHED PLASTIC

Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TPIKL ...	2,58	12,88



### COLOURS



= News 2019

**\* = Production on demand with minimum quantity of 100 pcs. Delivery time 4/5 weeks, price to agree**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

**PROSTYLE KL 10** is a step protecting profile, technical and very elegant, used to keep the step made of thin ceramic tiles and kerlite/laminam non-skid and non-slip. Product in anodized aluminium with the angle portion crimped in order to increase its adhesion. Internal height 4.5 mm. It is compulsory in public buildings to comply with accident-prevention regulations.

# PROSTYLE KL 10


ANODIZED SILVER ALUMINIUM



**ANODIZED SILVER ALUMINIUM**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PSYKLA 1045	4,5	6,93	18,71


### COLOURS




### CAPS - pack. 2 Pcs (1 R and 1 L)

Article	H mm	€/Pack.
TPSYKLA 1045/1	4,5	2,58

Articles not for sale singly

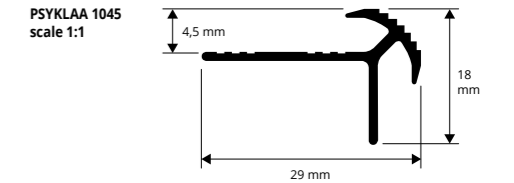

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

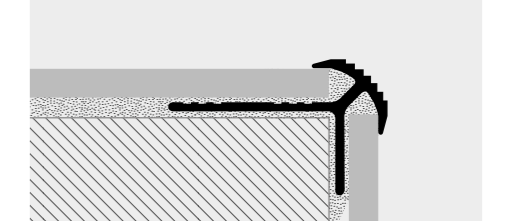

1. Cut "PROSTYLE KL 10" to the desired length. 2. Lay the tiles on the step rise and apply the adhesive on the step tread where the profile will be laid. 3. Lay the profile on the step tread aligning it with the tiles of the step rise. 4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile. 5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

**PROSTAIR KL 20** is a step protecting profile, technical and very elegant, used to keep the step made of thin ceramic tiles and kerlite/laminam non-skid and non-slip. Product in anodized aluminium with the upper portion crimped in order to increase its adhesion and a lower vertical tab created to cover the riser of the step. It is compulsory in public buildings to comply with accident-prevention regulations. Available height H 4.5 mm.


# PROSTAIR KL 20

ANODIZED SILVER ALUMINIUM


**ANODIZED SILVER ALUMINIUM**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTRKLA 2045	4,5	5,77	15,58

### COLOURS

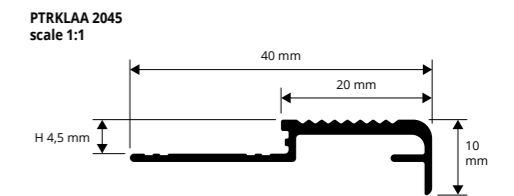

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

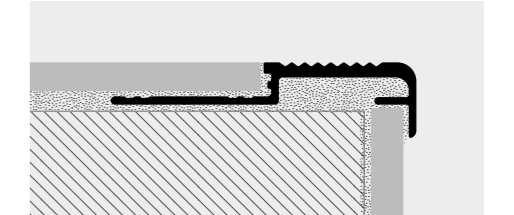

1. Cut "PROSTAIR KL 20" to the desired length. 2. Lay the tiles on the step rise and apply the adhesive on the step tread where the profile will be laid. 3. Fill the cavities on back of the profile with adhesive and lay it on the step tread aligning it with the tiles of the step rise. 4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile. 5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.