

PROSHOWER SYSTEM LINEAR KIT is an innovative solution, which combines functionality and design to answer



|) | PSHPANEK | PROSHOWER SYSTEM LINEAR KIT BASE | 1 | 355,00 |
|---|------------|--|----------|--------|
| | | | | |
| | Article | Kit components | Pc/Pack. | |
| | PSHPAN | Proshower panel in moulded polystyrene 120x120 cm with glued Profoil | 1 | |
| | PRBFXB | PROBAND FIX white | 2 | |
| | PRBPE 1507 | ROLL PROBAND 150 - 7,5 lm | 1 | |
| | PFLO 0405 | PROFOIL ROLL - 5 Im | 1 | |
| | PIAA 40212 | ALUMINUM PROFILES (screed leveling profile) length 120 cm | 2 | |
| | | ALL TALLET | _ | |







PROBAND 150 ALUN**MARIMI PRO**FILES

PROSHOWER PANEL CENTRAL

PROBAND FIX






PSHPANXTL 60120

PSHPANXT 60120

PROSHOWER PANEL EXTENSION EXEMPLES OF LAYING

| | PRBFXB | PRSPD | PIAA 40212 | |
|------------|-----------|--|------------|--------|
| Article | | Description | Pc/Pack. | €/Pc |
| PSHPAN | Proshower | panel in moulded polystyrene 120x120 cm with glued Profoil | 1 | 184,89 |
| 50 mm | 131 N | Slope 2 % | | _ ↓ |
| 15 mm ‡ | | | | 35 mm |

| | Article | Description | Pc/Pack. | €/Pc |
|----------|-----------------|---|----------|-------|
| ③ | PSHPANXT 60120 | PROSHOWER PANEL EXTENSION 120x60 cm for PROSHOWER PANEL LINEAR - Slope 2% | 1 | 92,44 |
| ③ | PSHPANXTL 60120 | LATERAL PROSHOWER PANEL EXTENSION 60x120 cm for PROSHOWER PANEL LINEAR - Slope 2% | 1 | 92,44 |

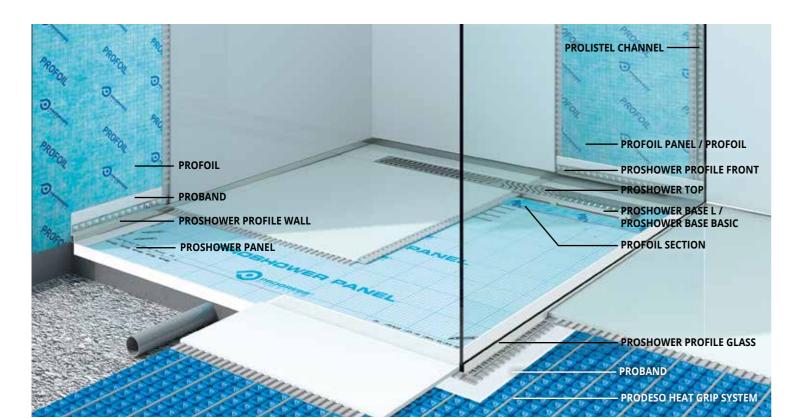


PROSHOWER BASE L is a channel body in stainless steel AISI 304/1.4301 - V2A steel for the realisation of floorlevel shower. The body channel, with an overall height of 85 mm, is completed by 6 different grids in stainless steel. **PROSHOWER BASE L** undergoes electro-polishing and subsequent passivation, which guarantees excellent resistence in any environment. Its low thickness combined with the fully adjustable siphon, the modularity and the high number of grids make it a much sought-after solution.

PROSHOWER BASE L

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A





DUCT BODY MADE OF AISI 304 STAINLESS STEEL

| Description | Pc/Pack. | €/Pc |
|-----------------------------------|---|---|
| PROSHOWER BASE L-ACC-L 30 x 8 cm | 1 | 262,65 |
| PROSHOWER BASE L-ACC-L 70 x 8 cm | 1 | 334,75 |
| PROSHOWER BASE L-ACC-L 80 x 8 cm | 1 | 355,35 |
| PROSHOWER BASE L-ACC-L 90 x 8 cm | 1 | 375,95 |
| PROSHOWER BASE L-ACC-L 100 x 8 cm | 1 | 396,55 |
| PROSHOWER BASE L-ACC-L 120 x 8 cm | 1 | 448,05 |
| | PROSHOWER BASE L-ACC-L 30 x 8 cm PROSHOWER BASE L-ACC-L 70 x 8 cm PROSHOWER BASE L-ACC-L 80 x 8 cm PROSHOWER BASE L-ACC-L 90 x 8 cm PROSHOWER BASE L-ACC-L 100 x 8 cm | PROSHOWER BASE L-ACC-L 30 x 8 cm 1 PROSHOWER BASE L-ACC-L 70 x 8 cm 1 PROSHOWER BASE L-ACC-L 80 x 8 cm 1 PROSHOWER BASE L-ACC-L 90 x 8 cm 1 PROSHOWER BASE L-ACC-L 100 x 8 cm 1 |

UPON REQUEST ROSHOWER BASE L with vertical siphon complete of installed Profoil membrane (code ref. PSHWDVS...). Drain Ø 50 mm.

PROSHOWER BASE BASIC is a water collecting duct system in polypropylene for floor showers, available in several lengths and grids.

PROSHOWER BASE BASIC

GREY POLYPROPYLENE






PSHWBB 60 / 70 / 80 / 90



GREY POLYPROPYLENE DUCT BODY

| Article | Description | Pc/Pack. | €/Pc |
|-----------|-------------------------------------|----------|--------|
| PSHWBB 60 | PROSHOWER BASE BASIC - 60 x 8 cm PP | 1 | 154,50 |
| PSHWBB 70 | PROSHOWER BASE BASIC - 70 x 8 cm PP | 1 | 164,80 |
| PSHWBB 80 | PROSHOWER BASE BASIC - 80 x 8 cm PP | 1 | 175,10 |
| PSHWBB 90 | PROSHOWER BASE BASIC - 90 x 8 cm PP | 1 | 185,40 |



PROFOIL SECTION

HDPE E PP GUAINE

| Article | Description | Pc/Pack. | €/Pc |
|------------|--|----------|-------|
| PSHANT 30 | PROFOIL section and double sided tape 3 lm | 1 | 15,45 |
| PSHANT 60 | PROFOIL section and double sided tape 3 lm | 1 | 17,51 |
| PSHANT 70 | PROFOIL section and double sided tape 3 lm | 1 | 19,57 |
| PSHANT 80 | PROFOIL section and double sided tape 3 lm | 1 | 23,69 |
| PSHANT 90 | PROFOIL section and double sided tape 3 lm | 1 | 27,81 |
| PSHANT 100 | PROFOIL section and double sided tape 3 lm | 1 | 31,93 |
| PSHANT 120 | PROFOIL section and double sided tape 3 lm | 1 | 37,08 |



PROFOIL SECTION AND DOUBLE SIDED TAPE

= News 2019

PROSHOWER TOP

TILE - LINE - DESIGN - STRIPS - GRILL - SQUARE SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A



| Arti | icle | Description | Pc/Pack. | €/Pc | |
|--------------|------|---|----------|--------|---|
| PSHWT | 30 | PROSHOWER TILE - ACC - Grid L 30 x 8 cm made of AISI 304 stainless steel | 1 | 108,15 | * |
| PSHWT | 60 | PROSHOWER TILE - ACC - Grid L 60 x 8 cm made of AISI 304 stainless steel | 1 | 123,60 | |
| PSHWT | 70 | PROSHOWER TILE - ACC - Grid L 70 x 8 cm made of AISI 304 stainless steel | 1 | 128,75 | |
| PSHWT | 80 | PROSHOWER TILE - ACC - Grid L 80 x 8 cm made of AISI 304 stainless steel | 1 | 133,90 | |
| PSHWT | 90 | PROSHOWER TILE - ACC - Grid L 90 x 8 cm made of AISI 304 stainless steel | 1 | 139,05 | |
| PSHWT | 100 | PROSHOWER TILE - ACC - Grid L 100 x 8 cm made of AISI 304 stainless steel | 1 | 154,50 | |
| PSHWT | 120 | PROSHOWER TILE - ACC - Grid L 120 x 8 cm made of AISI 304 stainless steel | 1 | 169,95 | |


Provided only combined with L. Proshower Base L.



| Article | Description | Pc/Pack. | €/Pc |
|-----------|---|----------|--------|
| PSHWL 60 | PROSHOWER LINE - ACC - Grid L 60 x 8 cm made of AISI 304 stainless steel | 1 | 123,60 |
| PSHWL 70 | PROSHOWER LINE - ACC - Grid L 70 x 8 cm made of AISI 304 stainless steel | 1 | 128,75 |
| PSHWL 80 | PROSHOWER LINE - ACC - Grid L 80 x 8 cm made of AISI 304 stainless steel | 1 | 133,90 |
| PSHWL 90 | PROSHOWER LINE - ACC - Grid L 90 x 8 cm made of AISI 304 stainless steel | 1 | 139,05 |
| PSHWL 100 | PROSHOWER LINE - ACC - Grid L 100 x 8 cm made of AISI 304 stainless steel | 1 | 154,50 |
| PSHWL 120 | PROSHOWER LINE - ACC - Grid L 120 x 8 cm made of AISI 304 stainless steel | 1 | 169,95 |

Provided only combined with L. Proshower Base L.





| Article | Description | Pc/Pack. | €/Pc | |
|-----------|---|----------|--------|----|
| PSHWD 30 | PROSHOWER DESIGN - ACC - Grid L 30 x 8 cm made of AISI 304 stainless steel | 1 | 108,15 | ٠, |
| PSHWD 60 | PROSHOWER DESIGN - ACC - Grid L 60 x 8 cm made of AISI 304 stainless steel | 1 | 123,60 | |
| PSHWD 70 | PROSHOWER DESIGN - ACC - Grid L 70 x 8 cm made of AISI 304 stainless steel | 1 | 128,75 | |
| PSHWD 80 | PROSHOWER DESIGN - ACC - Grid L 80 x 8 cm made of AISI 304 stainless steel | 1 | 133,90 | |
| PSHWD 90 | PROSHOWER DESIGN - ACC - Grid L 90 x 8 cm made of AISI 304 stainless steel | 1 | 139,05 | |
| PSHWD 100 | PROSHOWER DESIGN - ACC - Grid L 100 x 8 cm made of AISI 304 stainless steel | 1 | 154,50 | |
| PSHWD 120 | PROSHOWER DESIGN - ACC - Grid L 120 x 8 cm made of AISI 304 stainless steel | 1 | 169,95 | |
| | | | | |

| STRIPS | |
|----------------------------|--|
| PSHWST 60/70/80/90/100/120 | |
| | |
| | |
| | |
| | |

| Article | Description | Pc/Pack. | €/Pc | |
|------------|---|----------|--------|----|
| PSHWST 60 | PROSHOWER STRIPS - ACC - Grid L 60 x 8 cm made of AISI 304 stainless steel | 1 | 123,60 | _* |
| PSHWST 70 | PROSHOWER STRIPS - ACC - Grid L 70 x 8 cm made of AISI 304 stainless steel | 1 | 128,75 | * |
| PSHWST 80 | PROSHOWER STRIPS - ACC - Grid L 80 x 8 cm made of AISI 304 stainless steel | 1 | 133,90 | * |
| PSHWST 90 | PROSHOWER STRIPS - ACC - Grid L 90 x 8 cm made of AISI 304 stainless steel | 1 | 139,05 | * |
| PSHWST 100 | PROSHOWER STRIPS - ACC - Grid L 100 x 8 cm made of AISI 304 stainless steel | 1 | 154,50 | * |
| PSHWST 120 | PROSHOWER STRIPS - ACC - Grid L 120 x 8 cm made of AISI 304 stainless steel | 1 | 169,95 | * |



| Article | Description | Pc/Pack. | €/Pc | |
|------------|--|----------|--------|---|
| PSHWGR 60 | PROSHOWER GRILL - ACC - Grid L 60 x 8 cm made of AISI 304 stainless steel | 1 | 123,60 | * |
| PSHWGR 70 | PROSHOWER GRILL - ACC - Grid L 70 x 8 cm made of AISI 304 stainless steel | 1 | 128,75 | * |
| PSHWGR 80 | PROSHOWER GRILL - ACC - Grid L 80 x 8 cm made of AISI 304 stainless steel | 1 | 133,90 | * |
| PSHWGR 90 | PROSHOWER GRILL - ACC - Grid L 90 x 8 cm made of AISI 304 stainless steel | 1 | 139,05 | * |
| PSHWGR 100 | PROSHOWER GRILL - ACC - Grid L 100 x 8 cm made of AISI 304 stainless steel | 1 | 154,50 | * |
| PSHWGR 120 | PROSHOWER GRILL - ACC - Grid L 120 x 8 cm made of AISI 304 stainless steel | 1 | 169,95 | * |



| Article | Description | Pc/Pack. | €/Pc | |
|------------|---|----------|--------|---|
| PSHWSQ 60 | PROSHOWER SQUARE - ACC - Grid L 60 x 8 cm made of AISI 304 stainless steel | 1 | 123,60 | * |
| PSHWSQ 70 | PROSHOWER SQUARE - ACC - Grid L 70 x 8 cm made of AISI 304 stainless steel | 1 | 128,75 | * |
| PSHWSQ 80 | PROSHOWER SQUARE - ACC - Grid L 80 x 8 cm made of AISI 304 stainless steel | 1 | 133,90 | * |
| PSHWSQ 90 | PROSHOWER SQUARE - ACC - Grid L 90 x 8 cm made of AISI 304 stainless steel | 1 | 139,05 | * |
| PSHWSQ 100 | PROSHOWER SQUARE - ACC - Grid L 100 x 8 cm made of AISI 304 stainless steel | 1 | 154,50 | * |
| PSHWSQ 120 | PROSHOWER SQUARE - ACC - Grid L 120 x 8 cm made of AISI 304 stainless steel | 1 | 169,95 | * |


DRAIN REDUCTION


POLYPROPYLENE


| Article | Description | Pc/Pack. | €/Pc |
|-------------|---|----------|-------|
| PSHWRD 5040 | 50 to 40 mm polypropylene drain reduction | 1 | 10,30 |



REDUCTION









MODULAR ASSEMBLY KIT


| Article | Description | Pc/Pack. | €/Pc |
|---------|--|----------|-------|
| PSHWRD | Modular assembly kit to make drain ducts of any length | 1 | 26,78 |




MODULAR ASSEMBLY KIT















Prices are referred to whole packs.






PROSHOWER PROFILE GLASS

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

PROSHOWER PROFILE GLASS Suitable profile for fixing glass slabs in case of floor level showers with a a slope of 2%. Due to its particular shape and finish in satin-finish stainless steel AlSI 304 / 1.4301 – V2A, it covers and decorates the visible side of the screed.




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose "PROSHOWER PROFILE GLASS" according to the desired length. 2. Cut "PROSHOWER PROFILE GLASS" to the desired length and apply the adhesive on the support where the profile will be aid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal

PROSHOWER PROFILES GLASS IN SATINED STAINLESS STEEL AISI 304/1.4301-V2A - degreased and passivated thermo packed

| Article | Description | Pc/Pack. | €/Pc |
|-----------------|---|----------|--------|
| PSHWPGACS 100DX | Proshower profile glass satined stainless steel rx L 100 cm | 1 | 93,68 |
| PSHWPGACS 100SX | Proshower profile glass satined stainless steel lt L 100 cm | 1 | 93,68 |
| PSHWPGACS 150DX | Proshower profile glass satined stainless steel rx L 150 cm | 1 | 130,76 |
| PSHWPGACS 150SX | Proshower profile glass satined stainless steel lt L 150 cm | 1 | 130,76 |
| PSHWPGACS 200DX | Proshower profile glass satined stainless steel rx L 200 cm | 1 | 169,90 |
| PSHWPGACS 200SX | Proshower profile glass satined stainless steel lt L 200 cm | 1 | 169,90 |

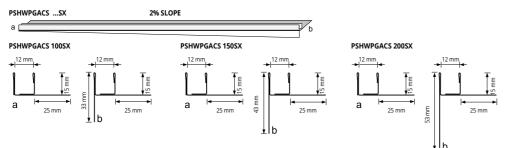

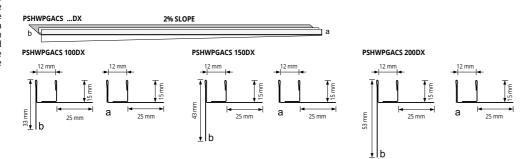

PROLISTEL CHANNEL

ANODIZED AND POLISHED ALUMINIUM

PLTCH... 08 - 10 - 11 -12.5

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

| 1 | | 100 | Series . | M | m |
|-----|--|-----|----------|---|---|
| 1/4 | | | | | |

| .OURS | |
|---------------------------|----------------------------|
| ANODIZED | POLISHED |
| - | |
| A - Anodized silver alum. | BC - Polished chrome alum. |

PROLISTEL CHANNEL is a F-shaped strip in anodized and polished aluminum suitable to decorate the wall coverings in ceramic tiles and natural stones. Its section allows the realization of a decorative joint which can also be used as a guide for the fixing of sheets of glass on floors and walls. Its particular section and the availability in two different finishes make **PROLISTEL CHANNEL** a much sought-after profile that allows an easy workmanlike application.

ANODIZED SILVER ALUMINIUM bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article | H mm | €/lm | €/Pc |
|-------------|------|-------|-------|
| PLTCHAA 08 | 8 | 11,85 | 32,00 |
| PLTCHAA 10 | 10 | 12,88 | 34,78 |
| PLTCHAA 11 | 11 | 13,65 | 36,86 |
| PLTCHAA 125 | 12,5 | 14,42 | 38,93 |

POLISHED CHROME ALUMINIUM bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article | H mm | €/lm | €/Pc |
|-------------|------|-------|-------|
| PLTCHBC 08 | 8 | 13,91 | 37,56 |
| PLTCHBC 10 | 10 | 14,94 | 40,34 |
| PLTCHBC 11 | 11 | 15,71 | 42,42 |
| PLTCHBC 125 | 12,5 | 16,48 | 44,50 |
| | | | |

0% SLOPE

1. Choose "PROLISTEL CHANNEL" according to the visible surface and desired finish. 2. Cut "PROLISTEL CHANNEL" to the desired length and apply the adhesive on the surface where the profile will be laid.

3. Press "PROLISTEL CHANNEL" into the adhesive, aligning it with the tiles leaving a 2 mm. joint. Remove immediately all remains of adhesive from the surface of the profile. 4. Fill the joint between the profile and this with requirements and the view of the profile. profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

Prices are referred to whole packs.


PROSHOWER PROFILE WALL Profile in satin-finish stainless steel AISI 304 / 1.4301 - V2A. It is suitable to cover and decorate the visible part of wall beside the shower tray in case of floor level showers with a slope of 2%.


PROSHOWER PROFILE WALL

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A


PROSHOWER PROFILES WALL IN SATINED STAINLESS STEEL AISI 304/1.4301-V2A - degreased and passivated thermo packed


| Article | Description | Pc/Pack. | €/Pc |
|-------------------|--|----------|-------|
| PSHWPLACS 1010DX | Proshower profile wall satined stainless steel 10 mm rx L 100 cm | 1 | 47,33 |
| PSHWPLACS 1010SX | Proshower profile wall satined stainless steel 10 mm lt L 100 cm | 1 | 47,33 |
| PSHWPLACS 1015DX | Proshower profile wall satined stainless steel 10 mm rx L 150 cm | 1 | 61,75 |
| PSHWPLACS 1015SX | Proshower profile wall satined stainless steel 10 mm lt L 150 cm | 1 | 61,75 |
| PSHWPLACS 1020DX | Proshower profile wall satined stainless steel 10 mm rx L 200 cm | 1 | 77,20 |
| PSHWPLACS 1020SX | Proshower profile wall satined stainless steel 10 mm lt L 200 cm | 1 | 77,20 |
| PSHWPLACS 12510DX | Proshower profile wall satined stainless steel 12,5 mm rx L 100 cm | 1 | 47,84 |
| PSHWPLACS 12510SX | Proshower profile wall satined stainless steel 12,5 mm lt L 100 cm | 1 | 47,84 |
| PSHWPLACS 12515DX | Proshower profile wall satined stainless steel 12,5 mm rx L 150 cm | 1 | 62,26 |
| PSHWPLACS 12515SX | Proshower profile wall satined stainless steel 12,5 mm lt L 150 cm | 1 | 62,26 |
| PSHWPLACS 12520DX | Proshower profile wall satined stainless steel 12,5 mm rx L 200 cm | 1 | 78,23 |
| PSHWPLACS 12520SX | Proshower profile wall satined stainless steel 12,5 mm lt L 200 cm | 1 | 78,23 |
| | | | |

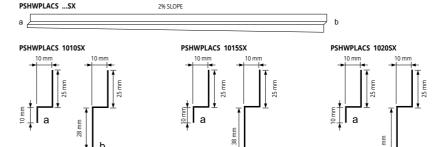


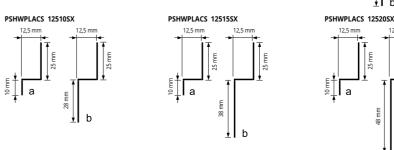















EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose "PROSHOWER PROFILE WALL" according to the desired length. 2. Cut "PROSHOWER PROFILE WALL" to the desired length and apply the adhesive on the support where the profile will be and apply the agnesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. **6.** Insert the sheet of glass and seal



SHOWER

PROSHOWER PROFILE FRONT is a satin-finish stainless steel AISI 304/1.4301-V2A profile. It is suitable to cover and decorate the visible part of wall in front of the shower tray in case of floor level showers with slope.

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROSHOWER PROFILE FRONT" according to the desired length. 2. Cut "PROSHOWER PROFILE FRONT" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. **6.** Insert the sheet of glass and seal

| PROSHOWER PROFILE FRONT SATINED STAINLESS STEEL AISI 304/1.4301-V2A - degreased and passivated thermo packed | | | | | |
|--|--|----------|-------|--|--|
| Article | Description | Pc/Pack. | €/Pc | | |
| PSHWPFACS 101028 | Proshower profile front satined stainless steel 10 mm H 28 mm L 100 cm | 1 | 47,33 | | |
| PSHWPFACS 101038 | Proshower profile front satined stainless steel 10 mm H 38 mm L 100 cm | 1 | 48,36 | | |
| PSHWPFACS 101048 | Proshower profile front satined stainless steel 10 mm H 48 mm L 100 cm | 1 | 51,45 | | |
| PSHWPFACS 101528 | Proshower profile front satined stainless steel 10 mm H 28 mm L 150 cm | 1 | 61,75 | | |
| PSHWPFACS 101538 | Proshower profile front satined stainless steel 10 mm H 38 mm L 150 cm | 1 | 62,78 | | |
| PSHWPFACS 101548 | Proshower profile front satined stainless steel 10 mm H 48 mm L 150 cm | 1 | 66,90 | | |
| PSHWPFACS 1251028 | Proshower profile front satined stainless steel 12,5 mm H 28 mm L 100 cm | 1 | 47,33 | | |
| PSHWPFACS 1251038 | Proshower profile front satined stainless steel 12,5 mm H 38 mm L 100 cm | 1 | 48,36 | | |
| PSHWPFACS 1251048 | Proshower profile front satined stainless steel 12,5 mm H 48 mm L 100 cm | 1 | 51,45 | | |
| PSHWPFACS 1251528 | Proshower profile front satined stainless steel 12,5 mm H 28 mm L 150 cm | 1 | 61,75 | | |
| PSHWPFACS 1251538 | Proshower profile front satined stainless steel 12,5 mm H 38 mm L 150 cm | 1 | 62,78 | | |
| PSHWPFACS 1251548 | Proshower profile front satined stainless steel 12,5 mm H 48 mm L 150 cm | 1 | 66,90 | | |


PSHWPFACS ...




| PSHWPFACS 101028 PSHWPFACS 101528 | PSHWPFACS 1251028 PSHWPFACS 1251528 | PSHWPFACS 101038 PSHWPFACS 101538 | PSHWPFACS 1251038 PSHWPFACS 1251538 | PSHWPFACS 101048 PSHWPFACS 101548 | PSHWPFACS 1251048 PSHWPFACS 1251548 |
|--------------------------------------|--|--------------------------------------|--|--------------------------------------|--|
| 10 mm | 12,5 mm | 10 mm | 12,5 mm | 10 mm | 12,5 mm |
| 25 mm | 25 mm | 25 mm | 25 mm | 25 mm 25 | 25 mm |
| ★ 28 mm | 1 28 mm | 1 38 mm | ▼ | 48 mm | 48 mm |

PROSHOWER PROFILE

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROSHOWER PROFILE" according to the desired length. 2. Cut "PROSHOWER PROFILE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal.


ROGRESS®

PROSHOWER PROFILE is a profile for floor level showers in stainless steel for the protection of the floor edges and as decoration of the screed visible side. The profile has a 2% slope. Its specific shape makes it an easy to lay profile to be used with all kind of floor.


PROSHOWER PROFILE SATINED STAINLESS STEEL AISI 304/1.4301-V2A - degreased and passivated thermo packed


| Article | Description | Pc/Pack. | €/Pc |
|------------------|---|----------|-------|
| PSHWPACS 1010DX | Proshower profile satined stainless steel H 10 mm L 100 cm rx | 1 | 62,32 |
| PSHWPACS 12510DX | Proshower profile satined stainless steel H 12,5 mm L 100 cm rx | 1 | 65,41 |
| PSHWPACS 1015DX | Proshower profile satined stainless steel H 10 mm L 150 cm rx | 1 | 75,71 |
| PSHWPACS 12515DX | Proshower profile satined stainless steel H 12,5 mm L 150 cm rx | 1 | 78,80 |
| PSHWPACS 1020DX | Proshower profile satined stainless steel H 10 mm L 200 cm rx | 1 | 92,65 |
| PSHWPACS 12520DX | Proshower profile satined stainless steel H 12,5 mm L 200 cm rx | 1 | 95,74 |
| PSHWPACS 1010SX | Proshower profile satined stainless steel H 10 mm L 100 cm lt | 1 | 62,32 |
| PSHWPACS 12510SX | Proshower profile satined stainless steel H 12,5 mm L 100 cm lt | 1 | 65,41 |
| PSHWPACS 1015SX | Proshower profile satined stainless steel H 10 mm L 150 cm lt | 1 | 75,71 |

Proshower profile satined stainless steel H 12,5 mm L 150 cm lt



PSHWPACS 12515SX





| PSHWPACS 1020SX - PSHWPACS 12520SX | | | | | |
|------------------------------------|----------------|------------|--|--|--|
| a 10/12,5 mm T E G | 10 / 12,5 mm b | 38 / 40 mm | | | |




78,80

92,65

95,74

= News 2019

Prices are referred to whole packs.



| PSHWPACS 1015DX - PSHWPACS 12515DX | | | | | | | |
|------------------------------------|------------|----------|------------|--|--|--|--|
| 10 / 12,5 mm | Ī | 10 / 12, | 5 mm T T E | | | | |
| b | 38 / 40 mm | a | 11/13,5 | | | | |
| Ι <u>±</u> | | | | | | | |
| PSHWPACS 1020DX - PSHWPACS 12520DX | | | | | | | |

| | l <u>+</u> | | |
|---------------------|------------|--------------|---------|
| PSHWPACS 1020DX - P | SHWPACS | 12520DX | |
| 10 / 12,5 mm | Ī | 10 / 12,5 mm | Ţ.Ę |
| b | 38 / 40 mm | a | 11/13,5 |

PROSHOWER SYSTEM CENTRAL KIT is an innovative solution, which combines functionality and design to answer

PROSHOWER SYSTEM **CENTRAL KIT** PROSHOWER DRAIN KIT

| | Article | Description | Pc/Pack. | €/Pc |
|----------|----------------|---|----------|--------|
| ② | CODICE + LATER | PROSHOWER SYSTEM CENTRAL KIT BASE + PROSHOWER DRAIN LATERAL KIT- lateral drain | 1 | 580,00 |
| ③ | CODICE + VERT | PROSHOWER SYSTEM CENTRAL KIT BASE + PROSHOWER DRAIN VERTICAL KIT - vertical drain | 1 | 560,00 |

| Article | Kit components | Pc/Pack. |
|-------------------------|---|----------|
| PSHPANC | PROSHOWER PANEL CENTRAL - moulded polystyrene 120 cm x 120 cm | 1 |
| PRBFXB | PROBAND FIX white | 2 |
| PRBPE 1507 | PROBAND 150 - 7,5 lm | 1 |
| PFLO 0405 | PROFOIL ROLL - 5 lm | 1 |
| PRSPD | PVC TOWEL | 1 |
| CODICE LAT/ VERT | PROSHOWER DRAIN LATERAL KIT or PROSHOWER DRAIN VERTICAL KIT | 1 |



| | Article | Description | Pc/Pack. | €/Pc |
|----------|---------|---|----------|--------|
| ③ | PSHLDK | PROSHOWER DRAIN LATERAL KIT - lateral drain | 1 | 125,00 |
| ③ | PSHVDK | PROSHOWER DRAIN VERTICAL KIT - vertical drain | 1 | 105,00 |

| | Article | Description | Pc/Pack. | €/Pc |
|----|---------|---|----------|--------|
| PS | SHPANC | PROSHOWER PANEL CENTRAL - moulded polystyrene 120 cm x 120 cm | 1 | 184,89 |
| L | | 1200 mm | | |
| | | | | _1 ↓ |
| | | | | 26 n |






PROSHOWER DRAIN LATERAL KIT

PROSHOWER DRAIN VERTICAL KIT



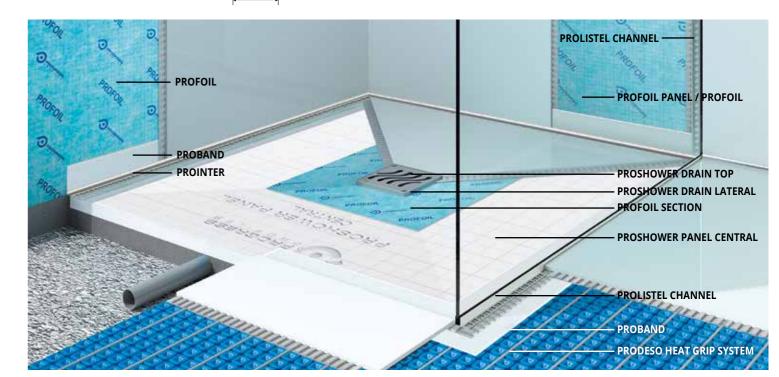

LATERAL KIT

VERTICAL KIT

ROGRESS®

ROF

guarantees high adhesion to the support.

ROLLS IN HDPE AND PP - Thickness 0,42 mm

| Article | Width roll H x L lm | total m² | €/m² | €/Roll |
|-----------|---------------------|----------|-------|--------|
| PFLO 0430 | 1 x 30 | 30 | 11,48 | 344,40 |
| PFLO 0405 | 1 x 5 | 5 | 15,97 | 79,85 |

AREAS OF USE

• **Use.** Waterproofing of substrates and vertical structures before the laying of ceramic and stone materials in areas subject to occasional contact with water like bathrooms and kitchens, with high vapor pressure like saunas and Turkish baths and with permanent contact with water also in pressure like swimming pools and tanks. On screed without cracks and completely cured, old ceramic floors and natural stones anchored to the substrate, concrete completely cured and wood supports.

• Don't use. On bituminous coverings, over insulating panels and lightweigh screed.

WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the technical department.







PROFOIL PASTE

PROFOIL PASTE is a ready to use thin-layer waterproofing elastic membrane with low emissions of volatile organic compounds.

WATERPROOFING ELASTIC MEMBRANE

WATERPROOFING ELASTIC MEMBRANE

| Article | Kg./Bucket | Bucket/ Pallet | €/Kg. | €/Bucket | €/Pallet |
|------------|------------|----------------|-------|----------|----------|
| PFLOPST 04 | 4 | 64 | 10,04 | 40,16 | 2.570,24 |
| PFLOPST 10 | 10 | 36 | 9,53 | 95,30 | 3.430,80 |

AREAS OF USE AND WARNINGS, see page 174



PROBAND FIX

MOISTURE-CURE SEALANT

PROBAND150/250

ROLLS IN HDPE AND PP



ROLLS IN HDPE AND PP - Thickness 0,42 mm

| Article | Roll width H mm x L lm | Rolls/ Pack. | €/lm | €/Roll | €/Pack. |
|-------------------|---------------------------|-----------------|------|--------|---------|
| PRBPE 1505 | 150 x 5 | 20 | 3,40 | 17,00 | 340,00 |
| PRBPE 1507 | 150 x 7,5 | 16 | 3,40 | 25,50 | 408,00 |
| PRBPE 1530 | 150 x 30 | 6 | 2,63 | 78,90 | 473,40 |
| PRBPE 2505 | 250 x 5 | 10 | 5,59 | 27,95 | 279,50 |
| PRBPE 2530 | 250 x 30 | 3 | 4,84 | 145,20 | 435,60 |

AREAS OF USE AND WARNINGS, see page 171 PRBPE 1505 available while stocks last

CORNERS and PIPE COLLAR

HDPE E PP







PREFORMED CORNERS AND PIPE COLLAR IN HDPE AND PP

Thickness **0,42 mm**

| | Article | HxLmm | Rolls/Pack. | €/Pc | €/Pack. |
|--|--------------------|-----------|-------------|------|---------|
| | PRBI (internal) | 150 x 150 | 10 Pcs | 7,98 | 79,80 |
| | PRBE (external) | 150 x 150 | 10 Pcs | 7,98 | 79,80 |
| | PRBT (pipe collar) | 125 x 125 | 10 Pcs | 7,73 | 77,30 |
| | | | | | |

AREAS OF USE AND WARNINGS, see page 172

pack. of 12 cartridges

| Article | Colours | Cartridge ml | €/Pc | €/Pack. |
|---------|---------|--------------|-------|---------|
| PRBFXB | WHITE | 290 | 13,91 | 166,92 |
| PRBFXG | GREY | 290 | 13,91 | 166,92 |
| | | | | |



MOISTURE-CURE SEALANT

GUN FOR MOISTURE-CURE SEALANT CARTRIDGE

| Article | Pc/Pack | €/Pc |
|----------|---------|--------|
| PRBFXGUN | 1 | 278,10 |



MOISTURE-CURE SEALANT CARTRIDGE

pack, of 12 cartridges

| | U | | | | |
|---------|---------|--------------|-------|---------|--|
| Article | Colours | Cartridge ml | €/Pc | €/Pack. | |
| PRBFXUB | WHITE | 600 | 27,30 | 327,60 | |
| PRBFXUG | GREY | 600 | 27,30 | 327,60 | |

AREAS OF USE AND WARNINGS, see page 172

PROFOIL PANEL are high density extruded polystyrene panels covered on both sides with a steam- and waterproofing membrane. The membrane is waterproofing and the adhesive to fix them reinforces the panels for a quick and inexpensive laying.

PROFOIL PANEL

HIGH DENSITY EXTRUDED POLYSTYRENE PANEL

PROFOIL PANEL 1524 mm - high density extruded polystyrene 915 mm x 1524 mm = 1,394 m^2

rticle Hmm Pcs Mq E/Mg E/Pc E/Pa


THICKNSS PROFOIL PANEL

| Article | пшш | /pallet | /pallet | €/WIY | E/PL | t/railet |
|----------|-------|---------|---------|-------|-------|----------|
| PFLPAN6 | 6,35 | 85 | 118,49 | 34,51 | 48,11 | 4089,35 |
| PFLPAN9 | 9,50 | 80 | 111,52 | 36,62 | 51,05 | 4084,00 |
| PFLPAN13 | 12,70 | 60 | 83,64 | 37,85 | 52,76 | 3165,60 |
| PFLPAN16 | 15,90 | 50 | 69,70 | 40,74 | 56,79 | 2839,50 |
| PFLPAN25 | 25,00 | 30 | 41,82 | 41,66 | 58,07 | 1742,10 |
| PFLPAN38 | 38,10 | 20 | 27,88 | 50,21 | 69,99 | 1399,80 |
| PFLPAN50 | 50.80 | 15 | 20.91 | 57.63 | 80.34 | 1205.10 |

PROFOIL PANEL 2700 mm - high density extruded polystyrene 915 mm x 2700 mm = 2,470 m²

| Article | H mm | Pcs /pallet | Mq /pallet | €/Mq | €/Pc | €/Pallet |
|---|-------|----------------|---------------|-------|--------|----------|
| PFLPAN627 | 6,35 | 85 | 209,95 | 34,51 | 85,24 | 7.245,4 |
| PFLPAN927 | 9,50 | 80 | 197,60 | 36,62 | 90,45 | 7.236,0 |
| PFLPAN1327 | 12,70 | 60 | 148,20 | 37,85 | 93,49 | 5.609,4 |
| PFLPAN1627 | 15,90 | 50 | 123,50 | 40,74 | 100,63 | 5.031,5 |
| PFLPAN2527 | 25,00 | 30 | 74,10 | 41,66 | 102,90 | 3.087,0 |
| PFLPAN3827 | 38,10 | 20 | 49,40 | 50,21 | 124,02 | 2.480,4 |
| PFLPAN5027 | 50,80 | 15 | 37,05 | 57,63 | 142,35 | 2.135,2 |
| PROFOIL PANEL in 2700 mm is available only in small quanti Please contact the office for availability. | | | | | | |

PFLPAN...

















PROFOIL AND PROBAND DOWELS, WASHERS, SCREWS

STAINLESS STEEL/ZINC-COATED METAL/GLASS FIBER NET



PROFOIL DOWELS - pack. 250 Pc

Prices are referred to whole packs.

| I NOT OIL DOWLLS - pack. 230 I C | | | |
|----------------------------------|------|------|---------|
| Article | L mm | €/Pc | €/Pack. |
| TZPFP 110 (zinc-coated metal) | 100 | 1,34 | 335,00 |
| TZPFP 140 (zinc-coated metal) | 140 | 1,49 | 372,50 |
| TZPFP 170 (zinc-coated metal) | 170 | 1,65 | 412,50 |
| TZPFP 200 (zinc-coated metal) | 200 | 1,80 | 450,00 |
| TIPFP 110 (stainless steel) | 110 | 2,58 | 645,00 |
| TIPFP 140 (stainless steel) | 140 | 2,78 | 695,00 |
| TIPFP 170 (stainless steel) | 170 | 2,99 | 747,50 |
| TIPFP 200 (stainless steel) | 200 | 3,19 | 797,50 |
| TIPFP 250 (stainless steel) | 250 | 3,71 | 927,50 |
| | | | |



PROFOIL WASHEDS (7INC-COATED METAL) - nack 100 Pr

| Article | Pcs/Pack. | ø mm | €/Pc | €/Pack |
|----------|-----------|------|------|--------|
| RFPFP 36 | 100 | 35 | 0,26 | 26,00 |



PROFOIL SCREWS (ZINC-COATED METAL)

| Article | Pcs/Pack. | L mm | €/Pc | €/Pack. | |
|-----------|-----------|------|-------|---------|--|
| VACPFP 35 | 1000 | 35 | 0,033 | 33,00 | |
| VACPFP 55 | 1000 | 45 | 0,037 | 37,00 | |
| VACPFP 80 | 1000 | 80 | 0,077 | 77,00 | |



| OBAND NET - roll 50 m | |
|-----------------------|--|
| Article | |
| | |

| Article | H MM | €/PC | |
|------------|------|------|--|
| PRBNET 100 | 100 | 8,76 | |
| | | | |





HIGH DENSITY EXTRUDED POLYSTYRENE

PROFOIL PANEL NICHE are prefabricated built-in elements of PROFOIL PANEL to make indoor wall niches and support surfaces. The niches can be linked to the waterproofing systems PROFOIL and PROFOIL PANEL. The fixing of the shelf inside the niche is optional. The shelf, part of the, can be fixed at the needed height. It is available in 4 sizes.




| | Article | Description | Pcs/Pack. | €/Pc |
|----------|--------------|---|-----------|-------|
| ③ | PFLPANICH 88 | WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm - 1/2", Inside size of the niche 203,2 x 203,2 mm - 8" x 8" | 1 | 54,95 |

97EPANICH 1212



| | Article | Description | Pcs/Pack. | €/Pc | |
|---|----------------|--|-----------|-------|---|
| • | PFLPANICH 1212 | WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm - 1/2", Inside size of the niche 304,8 x 304,8 mm - 12" x 12" | 1 | 63,90 | k |





| | Article | Description | Pcs/Pack. | €/Pc | |
|----------|---------------|---|-----------|-------|---|
| ③ | PFLPANICH 821 | WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm - 1/2", Inside size of the niche 203,2 x 533,4 mm - 8" x 21" | 1 | 84,50 | * |

PFLPANICH 1221

304,8

4 YESS

4 YESS

| | Article | Description | Pcs/Pack. | €/Pc | | |
|----------|----------------|--|-----------|-------|---|--|
| 9 | PFLPANICH 1221 | WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm - 1/2", Inside size of the niche 304,8 x 533,4 mm 12" x 21" | 1 | 94,90 | * | |

PROGOBOARD PANEL

HIGH DENSITY POLYISOCYANURATE FOAM PANEL

| 9 | 41 | - | 1 |
|-------|-------|--|--------------|
| 0.000 | Œ | 17 | |
| 81 | | The State of | 1520/2440 mm |
| 8 | 2 | 20.10 | 40/06 |
| 81 | e ggo | 1 | 1 |
| 8 | Ø | 15 | |

PROGOBOARD PANEL highdensity polyisocyanurate foam panel, covered on both sides with a fibre-glass reinforced cement-based waterproof coating to allow the laying of tiles. The panels, tested for a resistance long duration, are available in thickness of 6,25 / 12,5 / 25 and 50 mm, size of 92 x 152 cm and 122 x 244 cm and can be used on floors, false ceilings, walls, showers and ceilings.

PROGOBOARD PANEL - highdensity polyisocyanurate foam

| Article | Description | Pcs/pallet | Mq/pallet | €/Pc | €/Pallet | | | | | |
|-----------|--|------------|-----------|--------|-----------|--|--|--|--|--|
| PGOBOR06 | PRO-GOBOARD H 6,25 mm - 92 cm x 152 cm - 1,40 m ² | 75 | 105 | 65,00 | 4.875,00 | | | | | |
| PGOBOR125 | PRO-GOBOARD H 12,5 mm - 92 cm x 152 cm - 1,40 m ² | 60 | 84 | 73,00 | 4.380,00 | | | | | |
| PGOBOR25 | PRO-GOBOARD H 25 mm - 122 cm x 244 cm - 2,98 m ² | 30 | 89,4 | 399,02 | 11.970,60 | | | | | |
| PGOBOR50 | PRO-GOBOARD H 50 mm - 122 cm x 244 cm - 2,98 m ² | 15 | 44,70 | 689,08 | 10.336,20 | | | | | |



= News 2019

* = Production on demand with minimum quantity of 5 pcs. Delivery time 4/5 weeks, price to agree

Prices are referred to whole packs.

